


# USE AND CARE GUIDE

---

## LED 4 FT. STRIP LIGHT

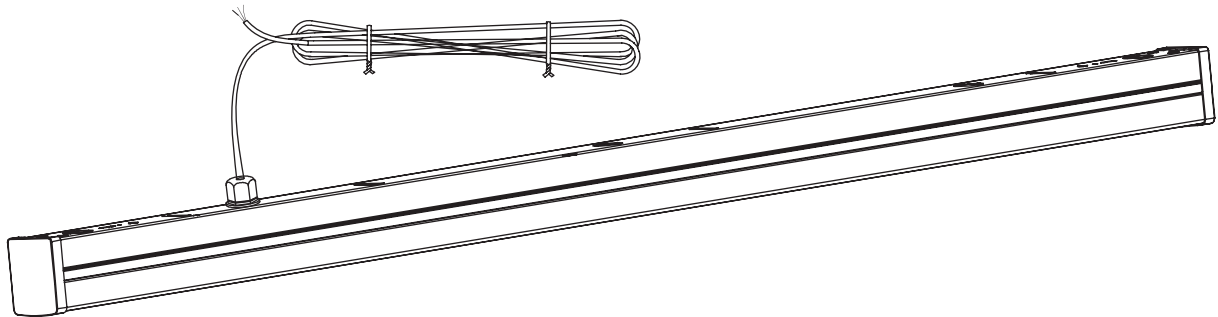

Questions, problems, missing parts?  
Call ETi SSL Customer Service  
8:30 a.m. – 5 p.m., EST, Monday - Friday  
**1-855-ETI-SSL (1-855-384-7754)**  
**[www.etissl.com](http://www.etissl.com)**

---

### **THANK YOU**

*Thank you for purchasing our LED product.*

*Visit us online at [www.etissl.com](http://www.etissl.com) to see our full line of LED products. Thank you for choosing ETi SSL!*

# Table of Contents

Table of Contents.....	2
Safety Information.....	2
Limited Warranty.....	2
Pre-Installation.....	3
Tools Required.....	3
Package Contents.....	3
Hardware Included.....	3

Installation Instruction.....	4
Installation Instruction (continued).....	6
Maintenance Instruction.....	7
Environmental requirement.....	7
Product carried standard.....	7
Care and Cleaning.....	7
Troubleshooting.....	7

## Safety Information



**WARNING:** Carefully read and understand the information given in this manual before beginning the assembly and installation. Failure to do so could lead to electric shock, fire, or other injuries which could be hazardous or even fatal.



**WARNING:** Ensure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off the circuit breaker.



**WARNING:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



**WARNING:** For safety, linked installations can be suspend Installation can only be conducted by the professional electrician, otherwise, there is a potential fire hazard.

**NOTICE:** Do not use this fixture with a dimmer switch.



**WARNING:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15B of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ☐ Reorient or relocate the receiving antenna
- ☐ Increase the separation between the equipment and the receiver.
- ☐ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ☐ Consult the dealer or an experienced radio/TV technician for help.

**NOTICE:** Minimum 75° supply conductors.

## Limited Warranty

This product is warranted for a period of 5 years from the date of original purchase against defects in materials and workmanship. If this product should fail to operate due to defects in material or workmanship within 60 months of purchase, see [www.etissl.com](http://www.etissl.com) for details. This product will be repaired or replaced, at ETi's option. This warranty is expressly limited to repair or replacement of product and liability for direct, incidental, or consequential damages is hereby expressly excluded. Some states do not allow exclusions of direct, incidental or consequential damages so the above limitation of exclusion may not apply to you. This warranty gives the consumer specific legal rights, which vary from state to state. WARRANTY IS VOID IF PRODUCT IS NOT USED FOR THE PURPOSE WHICH THIS PRODUCT IS MANUFACTURED.

# Pre-Installation



**NOTE:** Keep your receipt and these instructions for proof of purchase.


## TOOLS REQUIRED



Wire Strippers




Safety Goggles




Ladder



Gloves




Flathead Screwdriver



Phillips Screwdriver




Wire Cutters



Power drill with 1/8 drillbit

## PACKAGE CONTENTS

Part	Description	Quantity
A	LED 4 FT. STRIP LIGHT	1

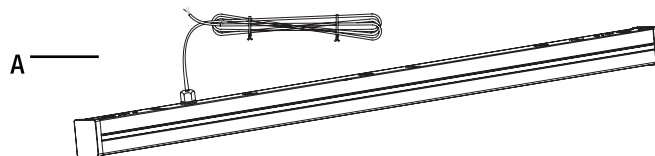


## HARDWARE INCLUDED



**NOTE:** Hardware not shown to actual size.


Part	Description	Quantity
AA	Wire Nuts	3
BB	Aircraft Cable	2
CC	Mounting Screw (0.6in not included)	2
R	Mounting Bracket (4in not included) (Comply with UL/cUL listed IFFX)	1

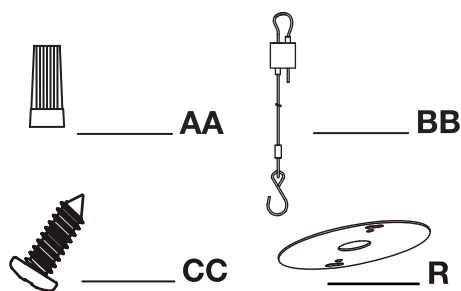

# Installation Instruction


## 1 Mounting to drywall

- Drill two hole (distance between two hole is 40.7in) in the ceiling.
- Make sure to fasten the combo wood-machine end into the metal hook.
- Tighten the Drywall Screw (not included) into the wood.

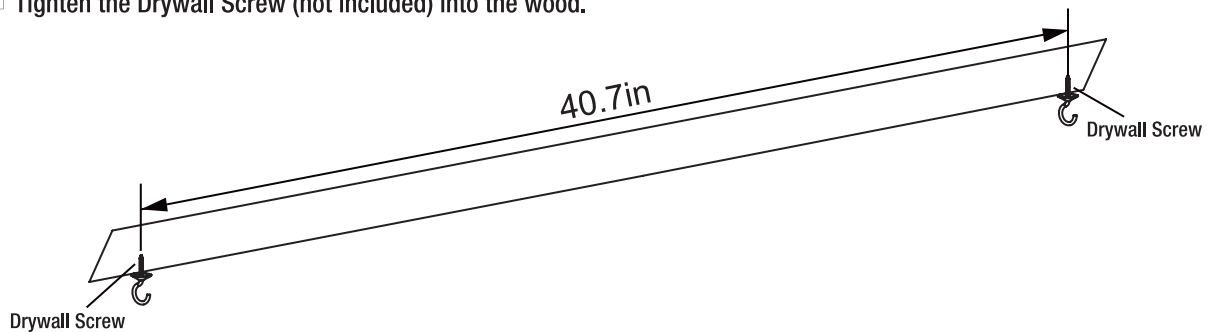


## 2 Mounting to wood

- Drill two hole (distance between two hole is 40.7in) in the ceiling to clear the closed flaps of the Toggle Bolt (not included).
- Make sure to fasten the toggle bolt into the butterfly nut before inserting the flaps into the ceiling.
- Tighten the toggle bolt.

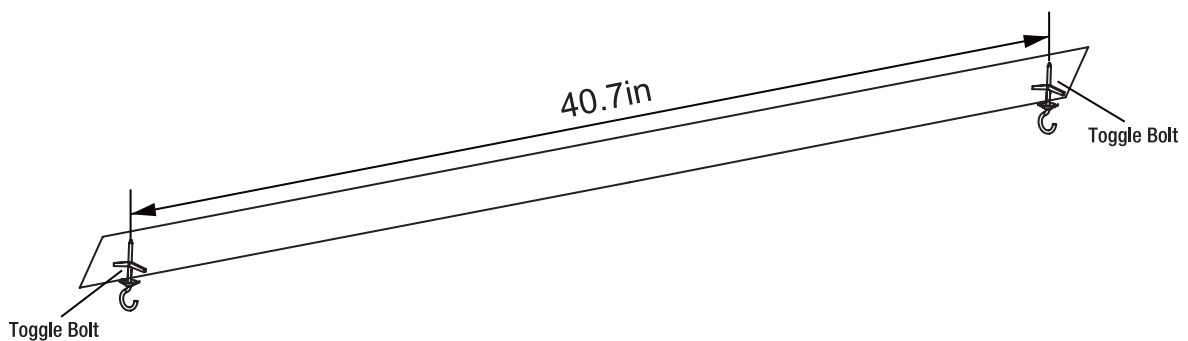

## 3 Attaching the aircraft cable to the ceiling


- Hang the aircraft cable (BB) on the ceiling.

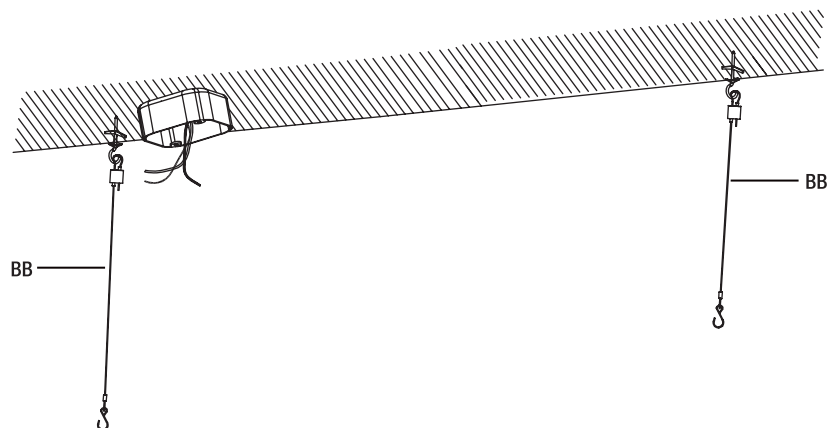

# Installation Instruction (continued)


## 4 Attaching the Strip Light to aircraft cable

- Install “S” shaped hook of aircraft cable (BB) on the LED Strip Light (A).
- Repeat this step on the other side of the LED Strip Light (A).
- Adjust aircraft cable to level light at the proper height by quick cabel-lock.

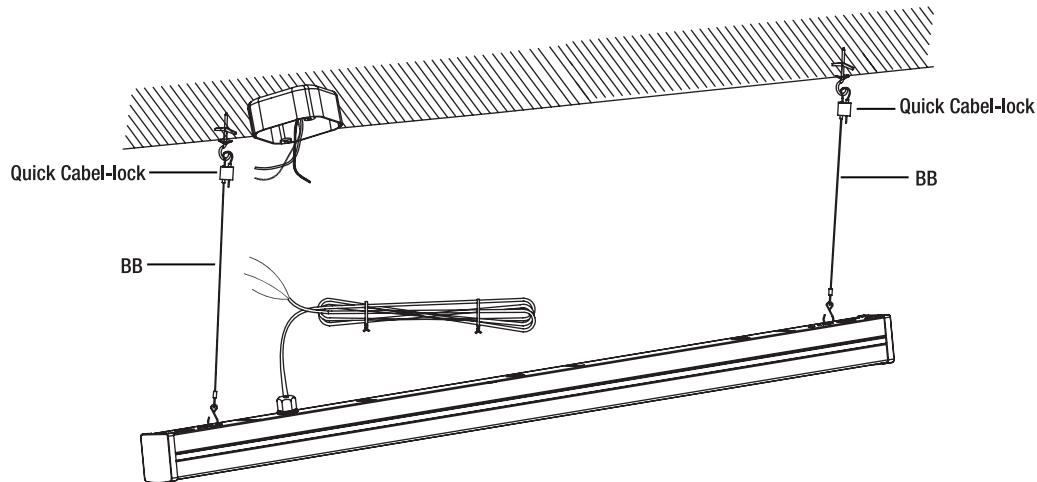

## 5 Connecting the electrical wires


- Connect the black wire and wire L together.
- Connect the white wire and wire N together.
- Connect the green wire and earth wire together.
- Cover the wire connection with the wire nuts (AA).

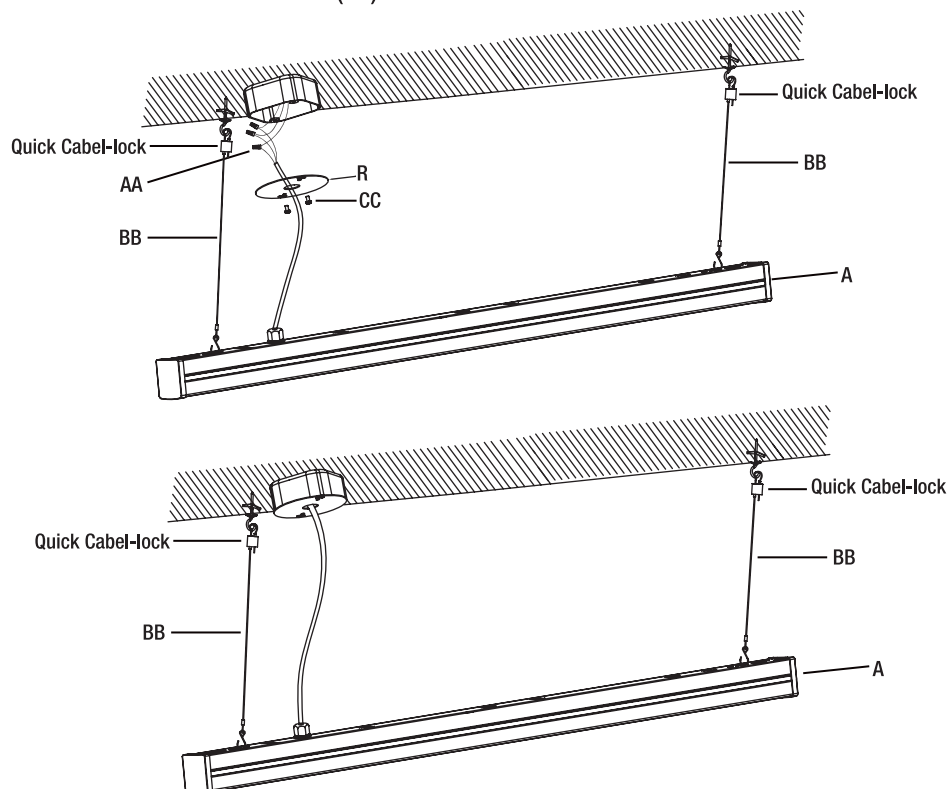

# Installation Instruction (continued)

**NOTICE:** This Strip Light is compatible with a Battery Backup (BBU). Contact ETi SSL to purchase ETi's BBU Model # 90600143. Wiring diagram below.

\*\*\* This strip light's **GRAY** and **PURPLE** wires are used for BBU attachment only, not for use for dimming. This light is non-dimming.

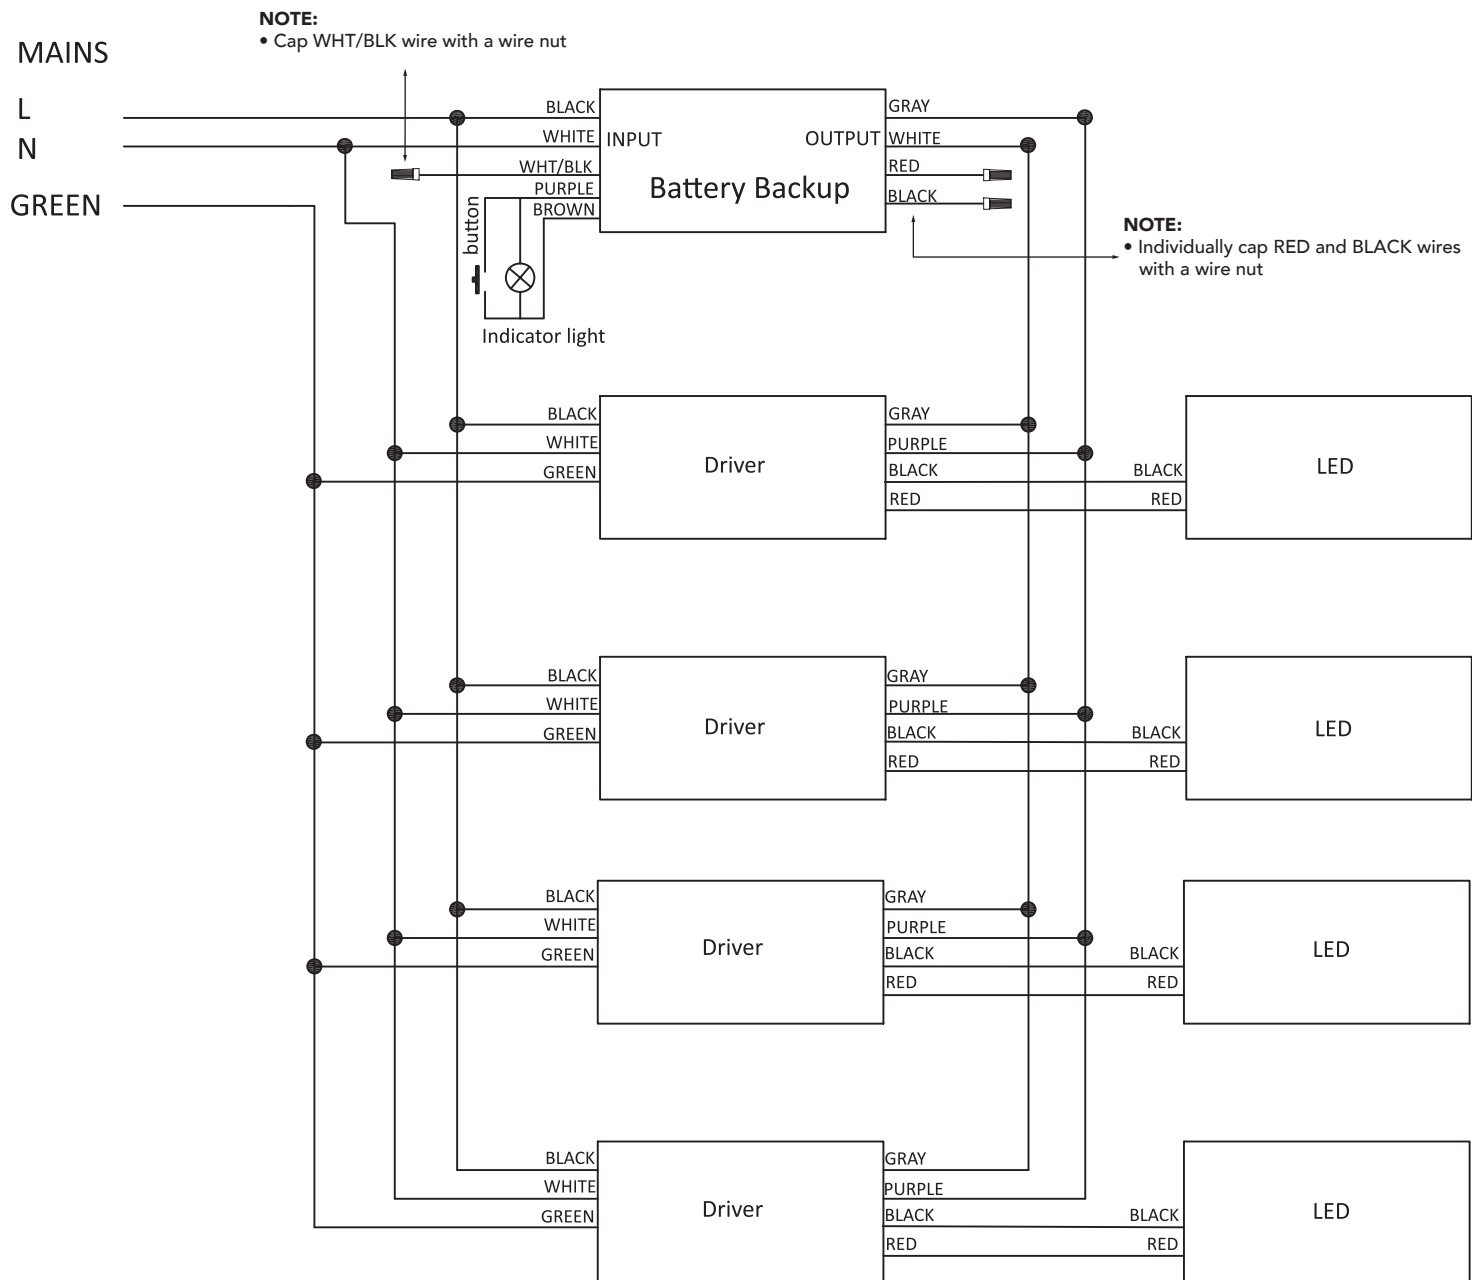

**NOTICE:** ETi does not provide extension wires or cables.

## Maintenance instruction

- 4.1 Do Not use volatile solvent such as alcohol to clean the troffer.
- 4.2 Use soft cotton cloth with suds to clean the troffer .
- 4.3 Non-professional Do not attempt to take apart and repair the troffer .
- 4.4 Please use the constant-current driver exclusively adaptive to the troffer, do not change the driver without permission .

## Environment requirement

Operating temperature: -4 °F~113 °F.

## Product carried standard

UL1598

## Care and Cleaning



**CAUTION:** Before attempting to clean the fixture, disconnect the power to the fixture by turning the breaker off or removing the fuse from the fuse box.

Clean the fixture with a soft, dry cloth.

Do not use any cleaners with chemicals, solvents, or harsh abrasives.

## Troubleshooting

Problem	Possible Cause	Solution
The fixture will not light.	The power is off.	Ensure the power supply is on.
	The circuit breaker is off.	Ensure the circuit breaker is in the on position.
The fuse blows or the circuit breaker trips when the light is turned on.	The wires are crossed or the power wire is grounding out.	Check the wire connections. Contact a qualified electrician or call the Customer Service Team at 1-855-384-7754.



Questions, problems, missing parts?  
Call ETi SSL Customer Service  
8:30 a.m. – 5 p.m., EST, Monday - Friday  
**1-855-ETI-SSL (1-855-384-7754)**  
**[www.etissl.com](http://www.etissl.com)**

Retain this manual for future use.

Imported by  
ETi Solid State Lighting, Inc.  
American Headquarters  
720 Northgate Parkway  
Wheeling, IL 60090

Made in China