



NVLAP[®]
TESTING
NVLAP LAB CODE 500080-0

Ref. No.: LCZP17090513

Version: 1.0

Date of issue: Sep. 29, 2017

Total pages: 12



Test report of

IES LM-79-08

Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Rendered to:

ETI Solid State Lighting (Zhuhai) Ltd
No.1, Zhongzhu Road South, Science & Technology Innovation Coast, High Tech District, Zhuhai City, Guangdong Prov., China

For products:

2x2 Luminaires for Ambient Lighting of Interior Commercial Spaces

Models No.:

FPE-22-40-850-MV-D

Test Date: Aug. 23, 2017 to Sep. 28, 2017

Test Item: Total luminous flux, Luminous Efficacy, Electrical values, Luminous Intensity Distribution, Chromaticity coordinates, CCT and CRI, Spectral Power Distribution.

Test Lab.: **LCTECH (Zhongshan) Testing Service Co., Ltd**
2/F., Technology and Enterprise Development Center, Guangyuan Road, Xiaolan, Zhongshan, Guangdong, China
Tel:+86-760-22833366 Fax:+86-760-22833399
E-mail:Service@lccert.com <http://www.lccert.com>

Template No.: LC-RT-PL/LM79-08/01

Test Note:

Complied by:

Fish Tan

Project Engineer

Sep. 29, 2017

Reviewed by:

Richard Li

Technical Manager

Sep. 29, 2017

The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.



LCTECH



Table of Contents

1. General	3
1.1 Product Information.....	3
1.2 Standards or methods.....	4
1.3 Equipment list.....	4
2. Test conducted and method	5
2.1 Ambient Condition.....	5
2.2 Power Supply Characteristics	5
2.3 Seasoning and Stabilization.....	5
2.4 Electrical Instrumentation.....	5
2.5 Color Measurement Method.....	5
2.6 Total Luminous Flux Measurement Method	5
2.7 Luminous Intensity Distribution Measurement Method.....	5
2.8 Spatial Non-uniformity of Chromaticity	5
3. Test Result Summary	6
3.1 Electrical data.....	6
3.2 Photometric data	6
3.3 Color Rendering Details	6
4. Test Data.....	7
4.1 Spectral Distribution	7
4.2 ANSI Chromaticity Quadrangles Diagram	7
4.3 Goniometry Test Data	8
4.4 Zonal Lumen Summary.....	8
4.5 Polar Curves	9
4.6 Candela Tabulation	10
Appendix 1 Product Photo	11
Appendix 2 U.S. Department of Energy Lighting Facts CM Uniform LM-79 Reporting Template ..	12



LCTECH



Page 3 of 12

Ref. No.: LCTEST/000513 , V1.0

1. General

1.1 Product Information

Brand Name	ETI
Product Type	2x2Luminaires for Ambient Lighting of Interior Commercial Spaces
Model Number	FPE-22-40-850-MV-D
Rated Inputs	100-277VAC, 50/60Hz
Rated Power	40W
Rated Light output	4000lm
Declared CCT	5000K
Power Supply	MPU45D-40E
LED Package, Array or Module	67-21S Series, EVERLIGHT ELECTRONICS CO., LTD
Dimming Information	Dimmable
Receipt Samples	1 unit
Sample Code of lab.	170819105002
Date of Receipt Samples	Aug. 19, 2017
Note	-



LCTECH



1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/NEMA/ ANSLG C78.377-2011	Specifications for the Chromaticity of Solid State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits—Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

1.3 Equipment list

Instrument	ID	Model name	Cal. date	Next cal. Date
AC Power supply	LC-I-923	CHP-500	2017-02-04	2018-02-03
AC Power supply	LC-I-987	APW-110N	2017-02-04	2018-02-03
Power analyzer	LC-I-928	WT210	2017-01-19	2018-01-19
Power analyzer	LC-I-954	WT210	2017-02-04	2018-02-03
Multimeter	LC-I-972	Fluke 17B	2017-08-10	2018-08-09
Photometric colorimetric electric system (2 meter sphere)	LC-I-900	SPR3000	Before use	Before use
Standard lamp	LC-I-963	24V/50W	2016-11-03	2017-11-03
Standard lamp	LC-PL-I-003	110V/200W	2017-09-22	2018-09-21
Goniophotometer(with mirror)	LC-I-902	GMS2000	2017-05-07	2018-05-06
Wireless temperature transmitter	LC-I-978	DWRF-B	2017-02-10	2018-02-10
Wireless temperature transmitter	LC-I-979	DWRF-B	2017-02-10	2018-02-10



LCTECH



2. Test conducted and method

The luminaire was operated at least 2 hours to reach stabilization and temperature equilibrium before test.

2.1 Ambient Condition

The ambient temperature in which measurements are being taken was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$; the air flow around the sample(s) being tested did not affect the performance.

2.2 Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within ± 0.2 percent under load.

2.3 Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

2.4 Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (95 % confidence interval, $k=2$).

2.5 Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

2.6 Total Luminous Flux Measurement Method

Total luminous flux was measured by type C goniophotometer system.

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the total luminous flux was calculated from the intensity data by software automatically.

2.7 Luminous Intensity Distribution Measurement Method

Luminous intensity distribution was measured by a mirror-type goniophotometer (Type C) which can keep the sample in burn position when the tests conduct, and the kinds of graph were generated by software automatically.

2.8 Spatial Non-uniformity of Chromaticity

The customer did not require this measurement.



LCTECH



Page 6 of 12

Ref. No.: LZHT/1000513 , V1.0

3. Test Result Summary

3.1 Electrical data

Criteria Item	Result(Sphere)	Result(Goniophotometer)
Input Voltage & Frequency	120.00 V~60Hz	120.01 V~60Hz
Input Current(A)	0.336	0.335
Total Power(W)	40.00	39.91
Power Factor	0.994	0.993
I-THD	3.92 %	-
Off-state Power(W)	-	-

3.2 Photometric data

Criteria Item	Result(Sphere)	Result(Goniophotometer)
Total Lumens(lm)	-	4302.96
Luminaire Efficacy(lm/W)	-	107.82
Correlated Color Temperature (CCT)(K)	4799	-
Color Rendering Index (CRI)	82.7	-
R9	11	-
Chromaticity Coordinate (x,y)	x = 0.3525 y = 0.3683	-
Chromaticity Coordinate (u,v)	u = 0.2100 v = 0.3291	-
Chromaticity Coordinate (u',v')	u' = 0.2100 v' = 0.4936	-
Duv	0.0053	-
Zone Lumens between 0-60 °	-	77.66%

3.3 Color Rendering Details

R1	R2	R3	R4	R5	R6	R7	R8
80	86	92	83	81	82	89	69
R9	R10	R11	R12	R13	R14	R15	-
11	69	82	59	81	96	74	-

Note: N.A.



LCTECH




Page 7 of 12


Ref. No.: LCTECH/000513 , V1.0

4. Test Data

4.1 Spectral Distribution

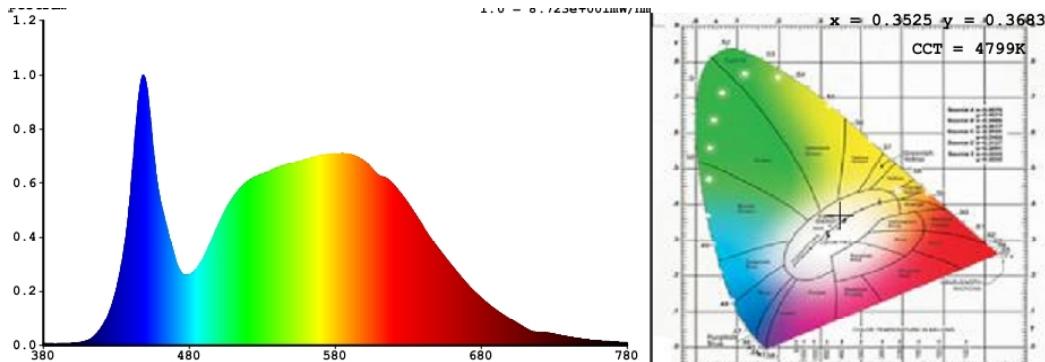

4.2 ANSI Chromaticity Quadrangles Diagram

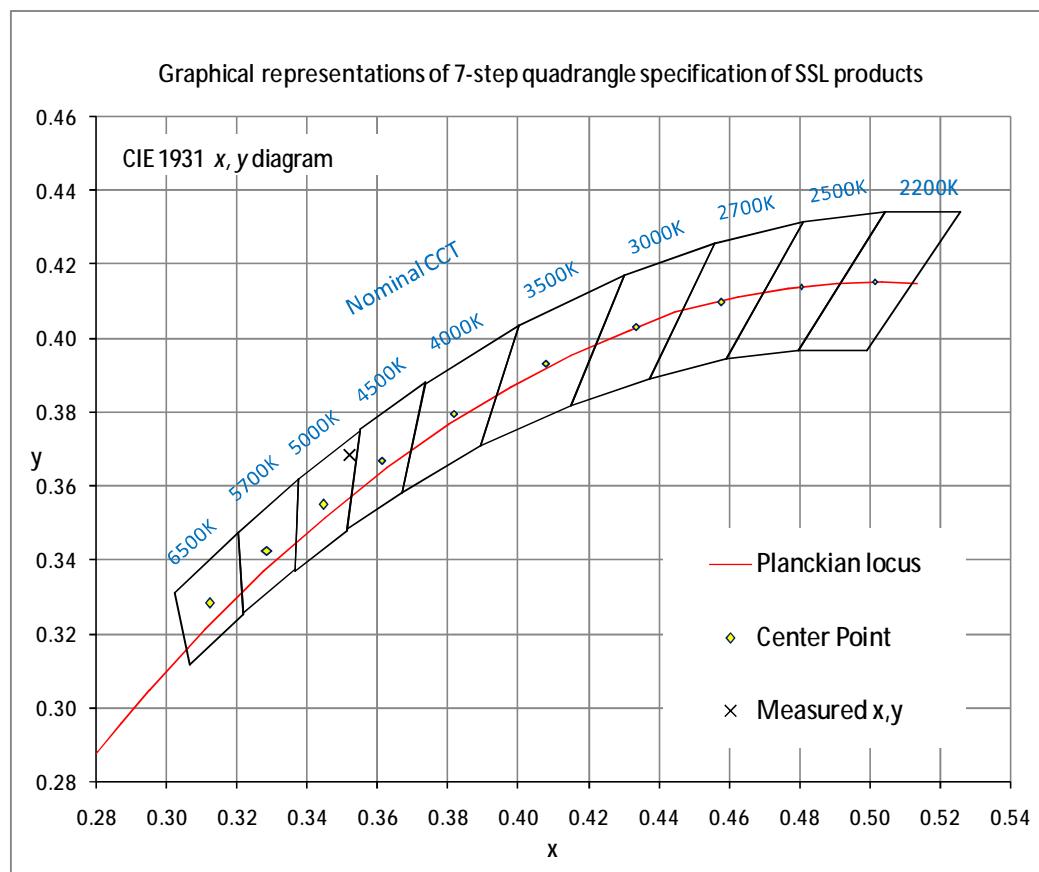



LCTECH



4.3 Goniometry Test Data

CIE Type	Direct	Basic Luminous Shape	Rectangular
Spacing Criteria (0-180)	1.26	Luminous Length	0.56 m
Spacing Criteria (90-270)	1.28	Luminous Width	0.56 m
Spacing Criteria (Diagonal)	1.40	Luminous Height	0.00 m
Test Distance	29.79 m		

4.4 Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixt
0-20	539.20	12.50	12.50
0-30	1146.62	26.60	26.60
0-40	1881.49	43.70	43.70
0-60	3342.03	77.70	77.70
0-80	4193.09	97.40	97.40
0-90	4291.03	99.70	99.70
10-90	4151.59	96.50	96.50
20-40	1342.29	31.20	31.20
20-50	2107.68	49.00	49.00
40-70	1994.73	46.40	46.40
60-80	851.06	19.80	19.80
70-80	316.87	7.40	7.40
80-90	97.94	2.30	2.30
90-110	4.00	0.10	0.10
90-120	5.45	0.10	0.10
90-130	6.88	0.20	0.20
90-150	9.30	0.20	0.20
90-180	11.94	0.30	0.30
110-180	7.94	0.20	0.20
0-180	4302.96	100.00	100.00

Total Luminaire Efficiency = 100.00%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	139.43
10-20	399.76
20-30	607.43
30-40	734.87
40-50	765.38
50-60	695.16
60-70	534.19
70-80	316.87
80-90	97.94
90-100	2.37
100-110	1.63
110-120	1.45
120-130	1.43
130-140	1.16
140-150	1.26
150-160	1.25
160-170	1.00
170-180	0.39




LCTECH



Page 9 of 12

Ref. No.: LCTECH/000513 , V1.0

4.5 Polar Curves

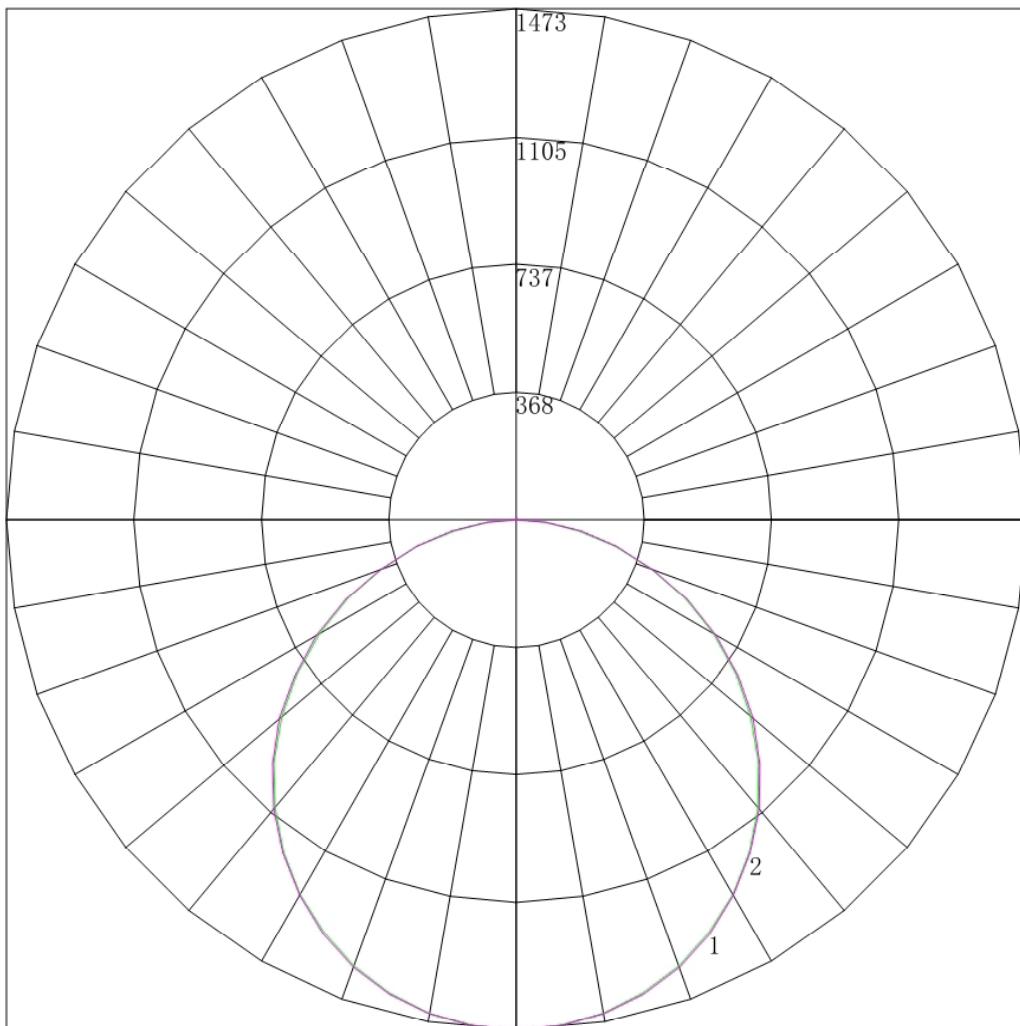

Maximum Candela = 1473.367 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180)

2 - Vertical Plane Through Horizontal Angles (90 - 270)



LCTECH



4.6 Candela Tabulation

	0	15	30	45	60	75	90
0	1473.367	1473.367	1473.367	1473.367	1473.367	1473.367	1473.367
5	1467.023	1467.462	1466.864	1466.782	1466.911	1467.024	1468.850
10	1447.459	1447.659	1447.467	1447.404	1448.054	1447.930	1450.246
15	1414.853	1415.736	1416.352	1415.788	1416.351	1415.930	1418.533
20	1371.777	1371.691	1372.321	1372.776	1373.733	1373.927	1376.322
25	1316.013	1316.835	1316.727	1317.836	1318.203	1318.774	1320.424
30	1250.490	1250.834	1250.702	1251.699	1253.423	1253.531	1253.144
35	1172.767	1173.090	1173.868	1174.432	1176.129	1175.802	1176.342
40	1085.772	1085.734	1086.827	1089.694	1088.031	1089.956	1091.342
45	989.816	988.764	991.973	992.983	994.077	995.329	995.227
50	883.878	887.021	887.287	887.514	890.738	890.345	892.828
55	773.948	775.933	778.141	778.054	781.631	779.817	780.592
60	656.698	658.185	659.074	660.215	662.407	663.856	665.787
65	538.028	536.640	538.542	538.428	540.765	542.284	542.877
70	414.301	416.671	418.365	416.132	419.346	419.248	419.037
75	296.519	296.925	298.433	298.624	299.412	299.273	298.831
80	182.463	184.460	185.602	185.750	186.422	189.632	189.074
85	84.644	83.938	83.824	83.629	85.369	86.489	86.094
90	3.948	3.641	4.350	3.658	4.459	4.324	2.569
95	1.641	1.643	1.620	1.596	1.597	1.552	1.551
100	1.641	1.576	1.487	1.596	1.509	1.508	1.507
105	1.597	1.598	1.576	1.552	1.575	1.530	1.507
110	1.464	1.510	1.465	1.463	1.464	1.486	1.507
115	1.508	1.465	1.376	1.419	1.398	1.397	1.462
120	1.597	1.532	1.509	1.508	1.486	1.508	1.506
125	1.641	1.687	1.620	1.685	1.620	1.708	1.683
130	1.553	1.532	1.576	1.552	1.531	1.552	1.506
135	1.375	1.399	1.420	1.397	1.420	1.353	1.373
140	1.730	1.709	1.687	1.707	1.708	1.641	1.639
145	2.041	1.998	1.997	2.018	2.085	2.040	1.993
150	2.351	2.287	2.242	2.261	2.285	2.284	2.391
155	2.662	2.686	2.774	2.705	2.707	2.728	2.657
160	3.150	3.197	3.174	3.170	3.217	3.193	3.188
165	3.549	3.530	3.573	3.547	3.572	3.570	3.631
170	3.860	3.885	3.817	3.791	3.838	3.859	3.897
175	4.126	4.174	4.195	4.190	4.215	4.191	4.163
180	4.309	4.309	4.309	4.309	4.309	4.309	4.309




LCTECH




Page 11 of 12

Ref. No.: LCTEST/000513 , V1.0

Appendix 1 Product Photo

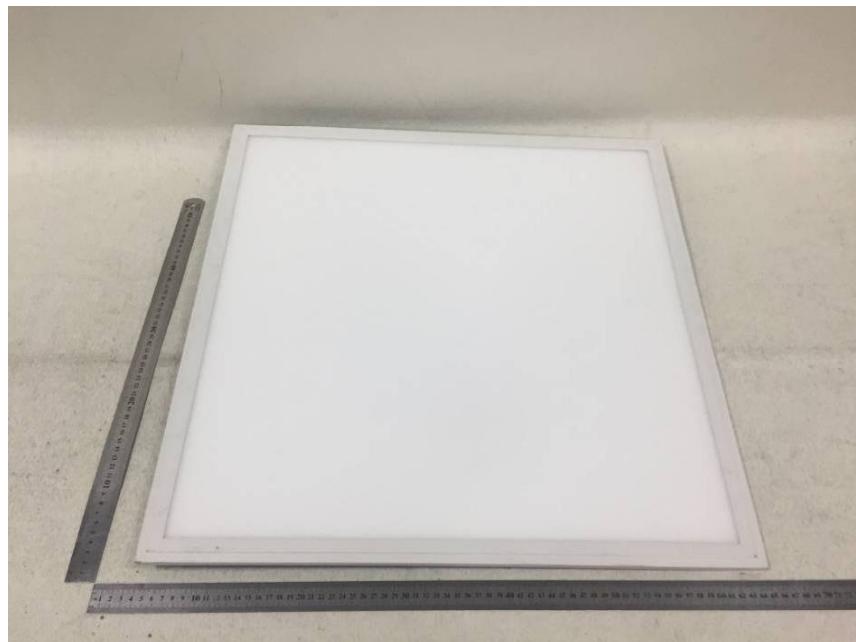

Picture 1

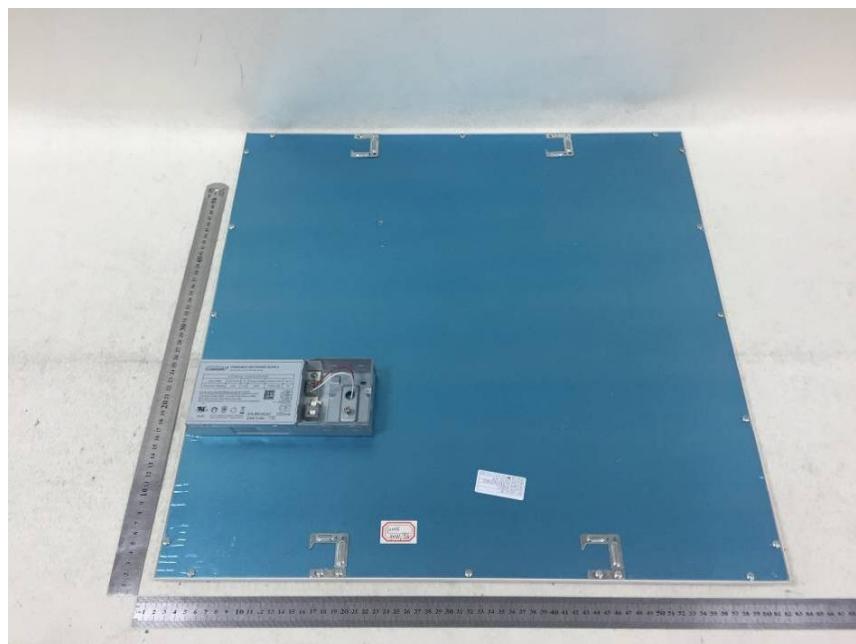

Picture 2



LCTECH



Page 12 of 12

Ref. No.: LCZP17090513 , V1.0

Appendix 2 U.S. Department of Energy Lighting Facts CM Uniform LM-79

Reporting Template

Laboratory Information

Name of test lab	LCTECH (Zhongshan) Testing Service Co., Ltd	
Date of test report	Sep. 29, 2017	
Test report number	LCZP17090513	
Laboratory contact name	Richard Li	

Product Information

Applicant	ETI Solid State Lighting (Zhuhai) Ltd	
Brand name	ETI	
Model number	FPE-22-40-850-MV-D	
SKU(if available)	N/A	
Type of luminaire (for integral lamps, list base type and lamp type)	2x2 Luminaires for Ambient Lighting of Interior Commercial Spaces	
Luminaire aperture	-	in.
Luminaire height	0.00	in.
Luminaire length	22.0	in.
Luminaire width	22.0	in.
Number of units(modular products)	N/A	

Electrical Measurements	Integrating sphere output	Goniophotometer Output
-------------------------	---------------------------	------------------------

Input wattage	40.00	39.91	W
Input current	0.336	0.335	A
Input voltage(AC)	120.00	120.01	V
Power factor	0.994	0.993	
Off-state power	0.0	0.0	W

Photometric Characteristics

Total initial lumen output	-	4302.96	lm
Initial luminaire efficacy	-	107.82	lm/W
Correlated color temperature / CCT	4799	K	
Color rendering index/CRI	82.7		
R9value	11		
Duv	0.0053		

Goniophotometer Output

Center beam candle power(if applicable)	--	1473.367	cd
Beam angle(if applicable)		113.2	°
Zonal lumens in the 0°-60° zone		77.67	%
Zonal lumens in the 60°-90° zone		29.79	%
Zonal lumens in the 90°-120° zone		0.69	%
Zonal lumens in the 120°-180° zone		0.15	%

****End of test report****