


# Wet Rated High Bay

24,000 lm | 120-277VAC | Model 50228761 | Part HB-185-850-MV-D

- > Energy Saving 185 Watt Integrated LED
- > Daylight 5000k CCT
- > Rated Life: 60,000 Hours
- > 0-10v Dimmable
- > IP65 Wet Location Rated
- > Maintenance Free — No Bulb Replacements
- > Impact Resistant Tempered Glass Lens
- > High 140° Maximum Temperature Rating
- > 5 Year Limited Warranty

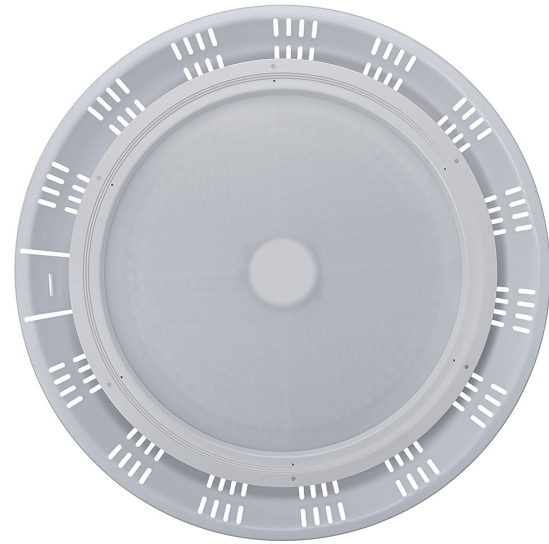

## SPECIFICATIONS

Model	50228761
Part	HB-185-850-MV-D
Description	Wet Rated High Bay
Input Voltage (VAC)	120-277
Wattage	185
Dimmability	0-10v
Average Rated Life <sup>1</sup>	60,000 hours
Typical Lumens <sup>2</sup>	24,000
CCT <sup>3</sup>	5000K
Location Rating	UL Wet
CRI <sup>4</sup>	≥80
Beam Angle	NA
Operating Temperature	Min -31°F (-35° C), Max 113°F (45° C)
Power Factor	>0.9
R9	19
DUV	-0.00036
CBCP	NA
Operating Frequency (Hz)	50/60

<sup>1</sup> Hours lifetime with 70% lumen maintenance

<sup>2</sup> Thermally stable typical lumens (±10%)

<sup>3</sup> Thermally stable CCT (±10%)

<sup>4</sup> Color rendering index/Ra

## TO ORDER:

[www.ETiSSL.com](http://www.ETiSSL.com)

Call: 1.855.ETi.SSLI

1.855.384.7754





# Wet Rated High Bay

24,000 lm | 120-277VAC | Model 50228761 | Part HB-185-850-MV-D

## SHIPPING INFORMATION

Model	50228761
Part	HB-185-850-MV-D
UPC	849489008790
Product Dimensions (W x H in.)	1' 6 7/64" x 5 19/32"
Product Dimensions (W x H cm.)	46.0 x 14.2
Product Weight (lbs.)	9.48
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	1
Master Carton Bar Code	50849489008795
Master Carton Dimensions (L x W x H in.)	
Master Carton Dimensions (L x W x H cm.)	
Master Carton Weight (lbs)	
Pallet Quantity	

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see [www.ETiSSL.com/fcc15b](http://www.ETiSSL.com/fcc15b)

**TO ORDER:**  
[www.ETiSSL.com](http://www.ETiSSL.com)  
Call: 1.855.ETi.SSLI  
1.855.384.7754

**ETi Solid State Lighting, Inc.**  
720 Corporate Woods Parkway  
Vernon Hills, IL 60061  
Phone: 855.384.7754  
Fax: 847.383.6256