


18" CLOSET LIGHT WITH PULL CHAIN

MODEL#53603142 | 1,478 LUMENS | 15.9W | 92.9LPW | 4000K



18" CLOSET LIGHT WITH PULL CHAIN  
**SUPERIOR VALUE & PERFORMANCE**

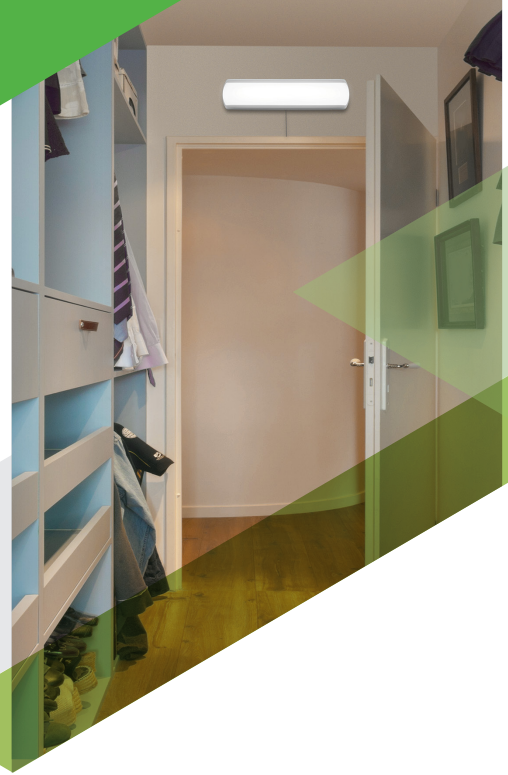

**PRODUCT OVERVIEW**

ETi SSL's 18in. Closet Light with Pull Chain is designed with impact resistant polycarbonate, ensuring durability and maintaining the color of the lens over time. It is UV, IR, and mercury-free. The light fixture comes with pull chain for easy grab. The Closet Light replaces outdated fluorescent tubes with a cool energy-efficient LED fixture that emits bright white light. Installation is quick and easy with ceiling or wall mounted options.

Our 18" Closet Light with Pull Chain is Energy Star rated and delivers 1,478 lumens of extremely uniform ambient 4000K illumination. Fixture is rated to operate reliably from -15° C (-4° F) and in high ambient 45° C (113° F) applications. The 18" Closet Light provides long-lasting maintenance free operation thanks to its reported 86.14% lumen maintenance @ 54,000 hours and projected L70 @ 121,000 hours. Ideal residential and commercial applications include, but are not limited to hallways and corridors, garages, storage rooms, closets, workshops and more.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

**STOCK ORDERING INFORMATION** (typical 2-3 day shipment lead time)<sup>1</sup>

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	Energy Star <sup>2</sup>
CS-18-12-840-SV	53603142	849489007540	18"	1,478	15.9	92.9	4000K	80 (min)	120V	Non-Dim	Yes

Notes:


1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Search first 6-digits of the model # followed by '##' on the ENERGY STAR® website database...(Ex '536031##') to view certifications.

# CS Series

18" Closet Light with Pull Chain

Model#53603142 | 1,478 Lumens | 15.9W | 92.9LPW | 4000K | ENERGY STAR® | 5 Year Warranty

## KEY DIMENSIONAL INFORMATION

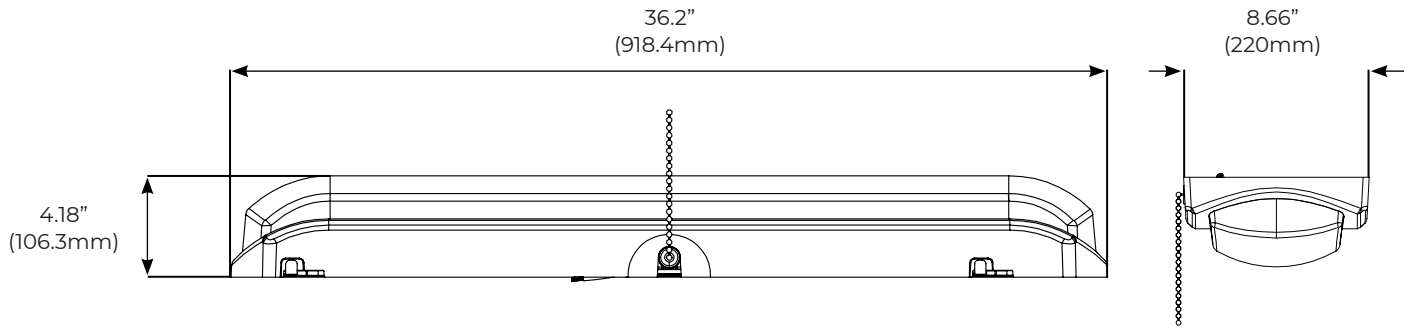

Note: All dimensions are shown in inches (millimeters).


## PHOTOMETRIC DETAILS

**Luminaire Data:** CS-18-12-840-SV

IES File Name	53603142.IES
CCT & CRI	4000K, 80CRI minimum
Initial Delivered Lumens	1,478
Wattage	15.9W
Efficacy	92.9
Beam Angle	50% = 118.4° 10% = 174.2°
Spacing	0° = 1.30 90° = 1.28

Photometric values based on tests performed in compliance with LM-63 & LM-79.

### Indoor Candela Plot

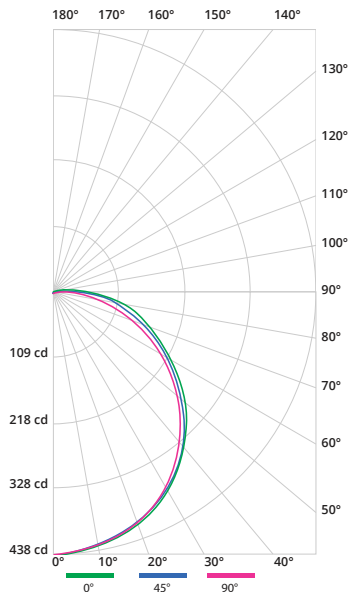

### Shipping Information

Unit Weight <sup>1</sup>	Size	Case Pack
1.5 lbs	18" unit	2 units

<sup>1</sup> Case pack weighs 3 lbs (2 units / per case pack).

## AVAILABLE STOCK ACCESSORIES (must be ordered separately)



### Emergency LED Driver/BBU (field installed)

Catalog Logic/PT#	Model #	Description
EMA25FY-170 (G2)	70112202	25W, IP rated, 90 minutes, Square
EMUFO-40170-YY (G2)	70114401	40W, IP rated, 90 minutes, Round
EMUFO-25170-YY (G3)	70112201-2	25W, IP rated, 90 minutes, Round
EMUFO-40170-YY (G3)	70114401-2	40W, IP rated, 90 minutes, Round
EMA25FY-170 (G3)	70112202-2	25W, IP rated, 90 minutes, Square
EMA40FY-170 (G3)	70114402-2	40W, IP rated, 90 minutes, Square
BLD-AM08N	70101101	8W, IP rated, 90 minutes, Square

## MISC. PRODUCT SPECS & DETAILS

### Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 dBA
Low Temp Start	-15° C (-4° F)
Max Temp	45° C (113° F)
Unit Weight	1.5 lbs

### Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 86.14%
Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	121,000



ETI Solid State Lighting  
720 Northgate Parkway, Wheeling, IL 60090

1.855.384.7754 | www.ETISSL.com | etiorders@ETISSL.com

All specifications are subject to change without notice. All reported values are nominal or typical values, measured under laboratory conditions @ 25° C (77° F). Actual performance can vary slightly as a result of end-user application & environment.