

2' WRAP LIGHT

MODEL#54655441 | 1,859 LUMENS | 19.6W | 94.8LPW | 4000K



## 2' WRAP LIGHT SUPERIOR VALUE & PERFORMANCE



### PRODUCT OVERVIEW

ETi SSL's 2ft. Wrap Light offers a low profile space saving solution that saves you time and money. With an installed profile length of 2', it is ideally suited for spaces limited by available width. The compact form factor makes this an ideal light fixture for walk-in closet, kitchen, storage room, garage, or basement. This 2ft. Wrap Light has slip tabs for easy lens removal and quick connects for easy installation.

Our 2ft. Wrap Light is approved for use in damp locations and delivers 1,859 lumens of extremely uniform ambient 4000K illumination. This fixture is rated to operate reliably from -20°C (-4°F) and in high ambient 45°C (113°F) applications. The 2ft. Wrap Light provides long-lasting maintenance free operation thanks to its reported 88.87% lumen maintenance @ 60,000 hours and projected L70 @ 178,000 hours.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

### STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)<sup>1</sup>

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	Energy Star <sup>2</sup>
WR-2-20-940-MV-D	54655441	849489009988	2'	1,859	19.6	94.8	4000K	90 (min)	120-277V	0-10V	Yes

Notes:

1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.


2. Search first 6-digits of the model # followed by '##' on the ENERGY STAR® website database..(Ex. '546554##') to view certifications.

# WR Series

2' Wrap Light

Model#54655441 | 1,859 Lumens | 19.6W | 94.8LPW | 4000K | ENERGY STAR® | 5 Year Warranty

## KEY DIMENSIONAL INFORMATION

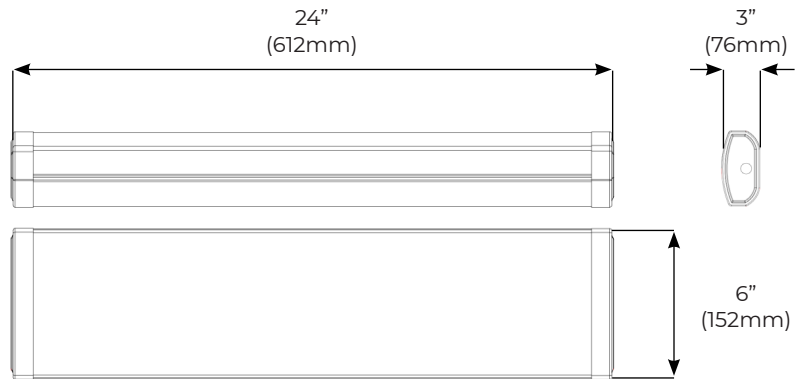

Note: All dimensions are shown in inches (millimeters).


## PHOTOMETRIC DETAILS

**Luminaire Data:** WR-2-20-940-MV-D

IES File Name	<b>54655441.IES</b>
CCT & CRI	<b>4000K, 90CRI minimum</b>
Initial Delivered Lumens	<b>1,859</b>
Wattage	<b>19.6W</b>
Efficacy	<b>94.8</b>
Beam Angle	<b>50% = 105.3° 10% = 157.6°</b>
Spacing	<b>0° = 1.20 90° = 1.24</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79.

### Indoor Candela Plot

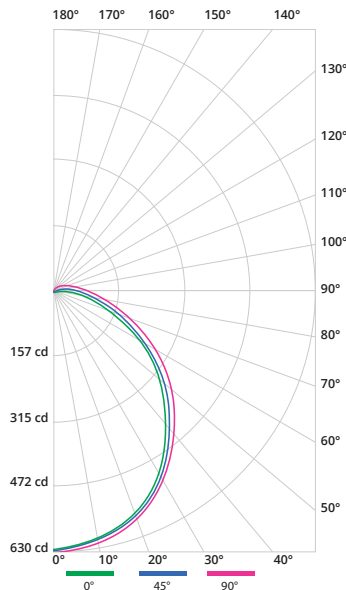

## AVAILABLE STOCK ACCESSORIES (must be ordered separately)



### Emergency LED Driver/BBU (field installed)

Catalog Logic/PT#	Model #	Description
EMA25FY-170 (G2)	70112202	25W, IP rated, 90 minutes, Square
EMUFO-40170-YY (G2)	70114401	40W, IP rated, 90 minutes, Round
EMUFO-25170-YY (G3)	70112201-2	25W, IP rated, 90 minutes, Round
EMUFO-40170-YY (G3)	70114401-2	40W, IP rated, 90 minutes, Round
EMA25FY-170 (G3)	70112202-2	25W, IP rated, 90 minutes, Square
EMA40FY-170 (G3)	70114402-2	40W, IP rated, 90 minutes, Square
MC601V	90600144	IP20, UL listed, Square

## MISC. PRODUCT SPECS & DETAILS

### Load Information

<b>Power Factor</b>	> 0.90
<b>THD</b>	< 20%
<b>Frequency</b>	50/60 Hz
<b>Sound Rating</b>	< 20 dBA
<b>Low Temp Start</b>	-20° C (-4° F)
<b>Max Temp</b>	45° C (113° F)
<b>Unit Weight</b>	2.9 lbs

### Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)
25° C (77° F)	> 88.87%
Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	178,000

## Shipping Information

Unit Weight <sup>1</sup>	Size	Pallet <sup>2</sup>
2.9 lbs	2' unit	216 units

1. Case pack weighs 2.9 lbs (4 units / per case pack).  
2. There are 54 case packs per pallet.



ETI Solid State Lighting  
720 Northgate Parkway, Wheeling, IL 60090

1.855.384.7754 [www.ETISSL.com](http://www.ETISSL.com) [etiorders@ETISSL.com](mailto:etiorders@ETISSL.com)

All specifications are subject to change without notice.  
All reported values are nominal or typical values, measured under laboratory conditions @ 25° C (77° F).  
Actual performance can vary slightly as a result of end-user application & environment.