

4' INDUSTRIAL VAPOR TIGHT

MODEL#54656241 | 3,862 LUMENS | 32.5W | 118.8LPW | 4000K



## 4' INDUSTRIAL VAPOR TIGHT SUPERIOR VALUE & PERFORMANCE



### PRODUCT OVERVIEW

ETi SSL's 4ft. Industrial Vapor Tight is designed with durable stainless-steel latches to prevent moisture and dirt from compromising the housing and damaging interior wires and components inside the fixture. Vapor Tights are weatherproof and rated IP65 as dust tight and protect against projected water. The Industrial Vapor Tight has suspended or ceiling mount options, included in the package are mounting brackets.

Our Industrial Vapor Tight is DLC listed and delivers 3,862 lumens of extremely uniform ambient 4000K illumination. Installation is quick and easy with direct wiring and plug in options. Fixture is rated to operate reliably from -30° C (-22° F) and in high ambient 45° C (113° F) applications. The 4ft. Industrial Vapor Tight provides long-lasting maintenance free operation thanks to its reported 66.17% lumen maintenance @ 60,000 hours and projected L70 @ 52,000 hours. Ideal residential and commercial applications include, but are not limited to offices, multi-family, hallways and corridors, garages, storage rooms, workshops and more.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

### STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)<sup>1</sup>

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	DLC <sup>2</sup>
VT-4-31-840-MV	54656241	849489009599	4'	3,862	32.5	118.8	4000K	80 (min)	120-277V	Non-Dim	Yes

Notes:


1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Search first 6-digits of the model # followed by '##' on the DLC QPL...Ex. '545981##' to view DLC qualified SKUs

# VT Series

4' Industrial Vapor Tight

Model#54656241 | 3,862 Lumens | 32.5W | 118.8LPW | 4000K | DLC | 5 Year Warranty

## KEY DIMENSIONAL INFORMATION

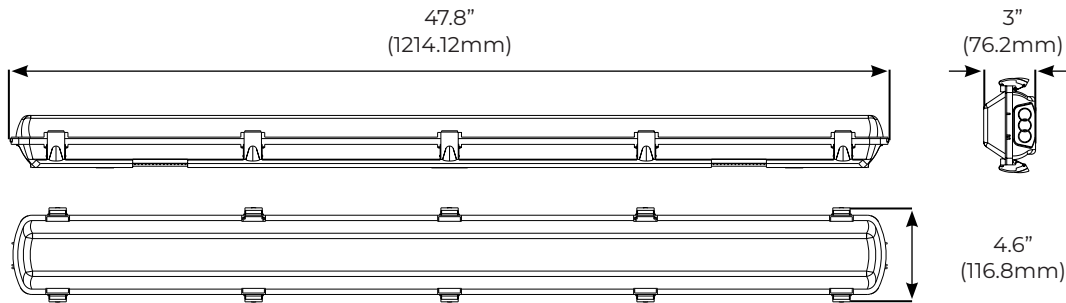

Note: All dimensions are shown in inches (millimeters).


## PHOTOMETRIC DETAILS

### Luminaire Data: VT-4-31-840-MV

IES File Name	54656241.IES
CCT & CRI	4000K, 80CRI minimum
Initial Delivered Lumens	3,862
Wattage	32.5W
Efficacy	118.8
Beam Angle	50% = 119.1° 10% = 160.4°
Spacing	0° = 1.22 90° = 1.30

Photometric values based on tests performed in compliance with LM-63 & LM-79.

### Indoor Candela Plot

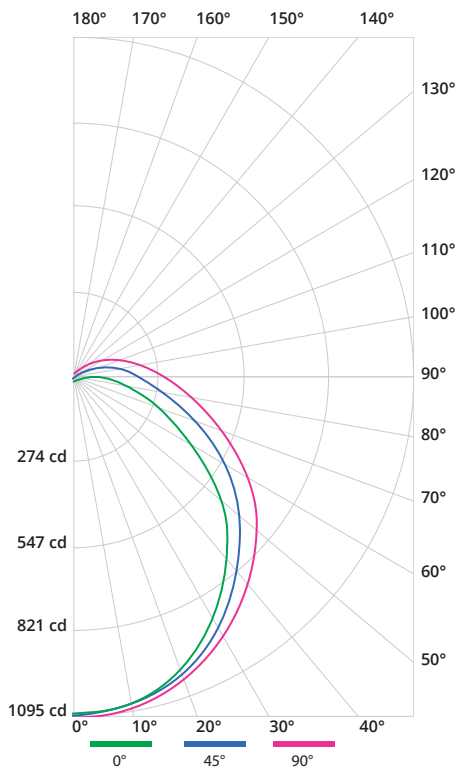

## AVAILABLE STOCK ACCESSORIES (must be ordered separately)



### Emergency LED Driver/BBU (field installed)

Catalog Logic/PT#	Model #	Description
EMA25FY-170 (G3)	70112202-2	25W, IP rated, 90 minutes, Square
EMA40FY-170 (G3)	70114402-2	40W, IP rated, 90 minutes, Square
EMUFO-25170-YY(G3)	70112201-2	25W, IP rated, 90 minutes, Round
EMUFO-40170-YY (G3)	70114401-2	40W, IP rated, 90 minutes, Round

## MISC. PRODUCT SPECS & DETAILS

### Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 dBA
Low Temp Start	-30° C (-22° F)
Max Temp	45° C (113° F)
Unit Weight	4.3 lbs

### Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)
25° C (77° F)	> 66.17%

Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	52,000

### Shipping Information

Unit Weight <sup>1</sup>	Size	Pallet <sup>2</sup>
4.3 lbs	4' unit	160 units

1. Case pack weighs 8.6 lbs (2 units / per case pack).  
2. There are 80 case packs per pallet.



ETI Solid State Lighting  
720 Northgate Parkway, Wheeling, IL 60090

1.855.384.7754 [www.ETISSL.com](http://www.ETISSL.com) [etiorders@ETISSL.com](mailto:etiorders@ETISSL.com)

All specifications are subject to change without notice.  
All reported values are nominal or typical values, measured under laboratory conditions @ 25° C (77° F).  
Actual performance can vary slightly as a result of end-user application & environment.