

4' WRAP LIGHT

MODEL#54676241 | 3,628 LUMENS | 39.9W | 90.9LPW | 4000K



# 4' WRAP LIGHT SUPERIOR VALUE & PERFORMANCE



## PRODUCT OVERVIEW

ETi SSL's 4ft. Wrap Light offers a low profile space saving solution that saves you time and money. It has a 4' profile length which makes it ideally suited for tight spaces. Ideal residential and commercial applications include, but are not limited to offices, multi-family, hallways and corridors, garages, storage rooms, workshops and more. The 4' Wrap Light is IC rated for direct contact with insulation. Integrated slip tabs allow for easy lens removal and quick connects make installation an ease.

Our 4' Wrap Light is DLC listed and delivers 3,628 lumens of extremely uniform ambient 4000K illumination. Installation is quick and easy with direct wiring and plug in options. Fixture is rated to operate reliably from -15° C (-4° F) and in high ambient 45° C (113° F) applications. The 4' Wrap Light provides long-lasting maintenance free operation thanks to its reported 92.36% lumen maintenance @ 54,000 hours and projected L70 @ 230,000 hours.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

## STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)<sup>1</sup>

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	DLC <sup>2</sup>
WR-4-36-940-MV-D	54676241	849489005096	4'	3,628	39.9	90.9	4000K	90 (min)	120-277V	0-10V	Yes

Notes:


1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Search first 6-digits of the model # followed by '##' on the DLC QPL...Ex. '546762##' to view DLC qualified SKUs.

# WR Series

4' Wrap Light

Model#54676241 | 3,628 Lumens | 90.9W | 90.9LPW | 4000K | DLC | 5 Year Warranty

## KEY DIMENSIONAL INFORMATION

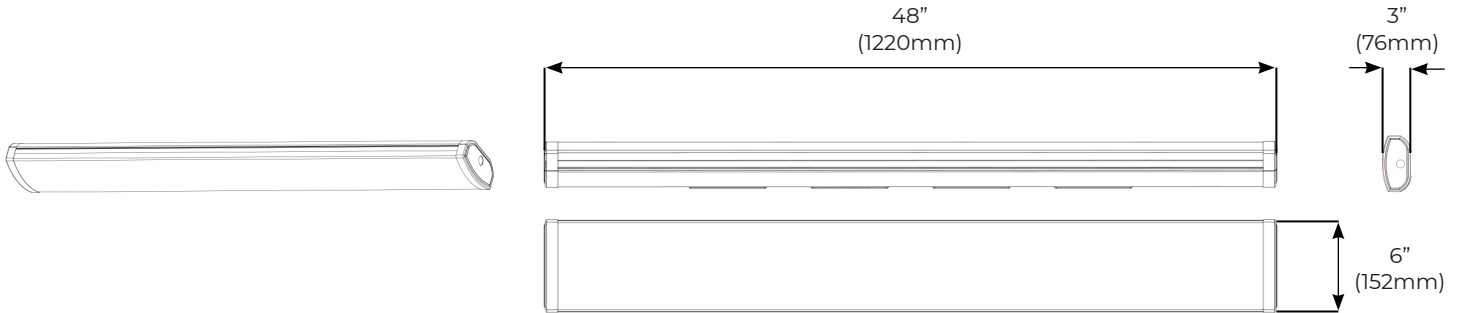

Note: All dimensions are shown in inches (millimeters).


## PHOTOMETRIC DETAILS

Luminaire Data: WR-4-36-940-MV-D

IES File Name	54676241.IES
CCT & CRI	4000K, 90CRI minimum
Initial Delivered Lumens	3,628
Wattage	39.9W
Efficacy	90.9
Beam Angle	50° = 111.1° 10% = 159.6°
Spacing	0° = 1.22 90° = 1.26

Photometric values based on tests performed in compliance with LM-63 & LM-79.

### Indoor Candela Plot

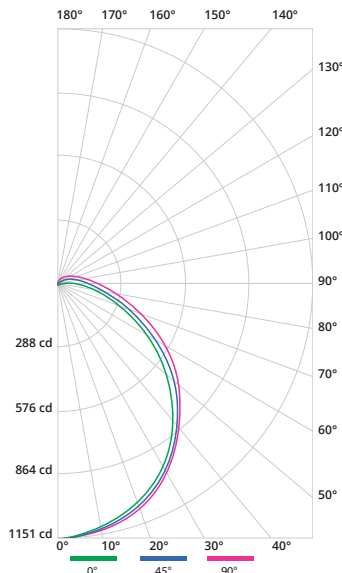

### Shipping Information

Unit Weight <sup>1</sup>	Size	Pallet <sup>2</sup>
4.1 lbs	4' unit	110 units

1. Case pack weighs 4.1 lbs (2 units / per case pack).  
2. There are 55 case packs per pallet.

## AVAILABLE STOCK ACCESSORIES (must be ordered separately)



### Emergency LED Driver/BBU (field installed)

Catalog Logic/PT#	Model #	Description
EMA25FY-170 (G2)	70112202	25W, IP rated, 90 minutes, Square
EMUFO-40170-YY (G2)	70114401	40W, IP rated, 90 minutes, Round
EMUFO-25170-YY (G3)	70112201-2	25W, IP rated, 90 minutes, Round
EMUFO-40170-YY (G3)	70114401-2	40W, IP rated, 90 minutes, Round
EMA25FY-170 (G3)	70112202-2	25W, IP rated, 90 minutes, Square
EMA40FY-170 (G3)	70114402-2	40W, IP rated, 90 minutes, Square

## MISC. PRODUCT SPECS & DETAILS

### Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 dBA
Low Temp Start	-15° C (-4° F)
Max Temp	45° C (113° F)
Unit Weight	4.1 lbs

### Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 92.36%
Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	230,000