

4' WRAP LIGHT

MODEL#54676241 | 3,628 LUMENS | 39.9W | 90.9LPW | 4000K



4' WRAP LIGHT SUPERIOR VALUE & PERFORMANCE



PRODUCT OVERVIEW

ETi SSL's 4ft. Wrap Light offers a low profile space saving solution that saves you time and money. It has a 4' profile length which makes it ideally suited for tight spaces. Ideal residential and commercial applications include, but are not limited to offices, multi-family, hallways and corridors, garages, storage rooms, workshops and more. The 4' Wrap Light is IC rated for direct contact with insulation. Integrated slip tabs allow for easy lens removal and quick connects make installation an ease.

Our 4' Wrap Light is DLC listed and delivers 3,628 lumens of extremely uniform ambient 4000K illumination. Installation is quick and easy with direct wiring and plug in options. Fixture is rated to operate reliably from -15° C (-4° F) and in high ambient 45° C (113° F) applications. The 4' Wrap Light provides long-lasting maintenance free operation thanks to its reported 92.36% lumen maintenance @ 54,000 hours and projected L70 @ 230,000 hours.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

| Catalog Logic/PT# | Model # | UPC | Size | Lumens | Wattage | LPW | CCT | CRI | Voltage | Dimming | DLC ² |
|-------------------|----------|--------------|------|--------|---------|------|-------|----------|----------|---------|------------------|
| WR-4-36-840-MV-D | 54676241 | 849489005096 | 4' | 3,628 | 39.9 | 90.9 | 4000K | 90 (min) | 120-277V | 0-10V | Yes |

Notes:


1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Search first 6-digits of the model # followed by '##' on the DLC QPL...Ex. '546762##' to view DLC qualified SKUs.

WR Series

4' Wrap Light

Model#54676241 | 3,628 Lumens | 90.9W | 90.9LPW | 4000K | DLC | 5 Year Warranty

KEY DIMENSIONAL INFORMATION

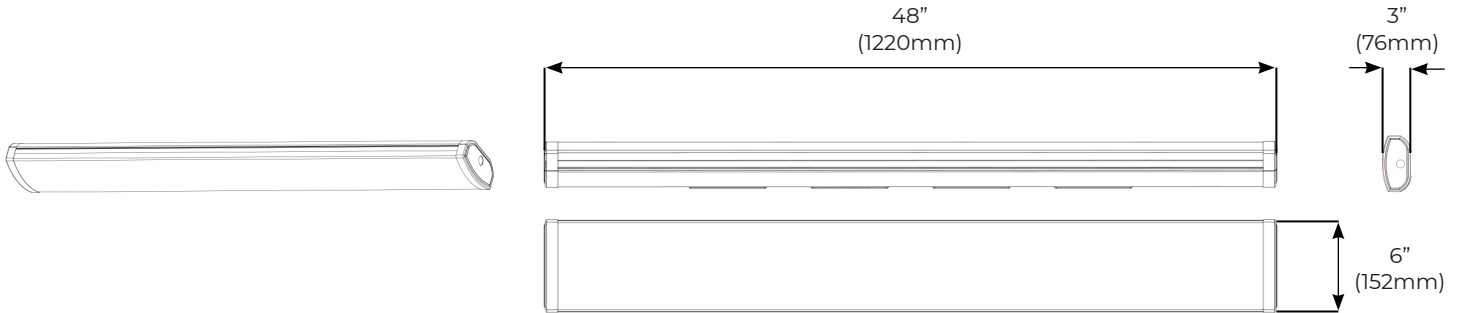

Note: All dimensions are shown in inches (millimeters).


PHOTOMETRIC DETAILS

Luminaire Data: WR-4-36-840-MV-D

| | |
|--------------------------|---------------------------|
| IES File Name | 54676241.IES |
| CCT & CRI | 4000K, 90CRI minimum |
| Initial Delivered Lumens | 3,628 |
| Wattage | 39.9W |
| Efficacy | 90.9 |
| Beam Angle | 50° = 111.1° 10% = 159.6° |
| Spacing | 0° = 1.22 90° = 1.26 |

Photometric values based on tests performed in compliance with LM-63 & LM-79.

Indoor Candela Plot

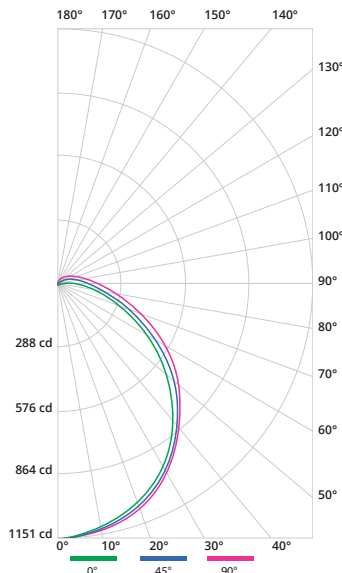

Shipping Information

| Unit Weight ¹ | Size | Pallet ² |
|--------------------------|---------|---------------------|
| 4.1 lbs | 4' unit | 110 units |

1. Case pack weighs 4.1 lbs (2 units / per case pack).
2. There are 55 case packs per pallet.

AVAILABLE STOCK ACCESSORIES (must be ordered separately)



Emergency LED Driver/BBU (field installed)

| Catalog Logic/PT# | Model # | Description |
|---------------------|------------|-----------------------------------|
| EMA25FY-170 (G2) | 70112202 | 25W, IP rated, 90 minutes, Square |
| EMUFO-40170-YY (G2) | 70114401 | 40W, IP rated, 90 minutes, Round |
| EMUFO-25170-YY (G3) | 70112201-2 | 25W, IP rated, 90 minutes, Round |
| EMUFO-40170-YY (G3) | 70114401-2 | 40W, IP rated, 90 minutes, Round |
| EMA25FY-170 (G3) | 70112202-2 | 25W, IP rated, 90 minutes, Square |
| EMA40FY-170 (G3) | 70114402-2 | 40W, IP rated, 90 minutes, Square |

MISC. PRODUCT SPECS & DETAILS

Load Information

| | |
|-----------------------|----------------|
| Power Factor | > 0.90 |
| THD | < 20% |
| Frequency | 50/60 Hz |
| Sound Rating | < 20 dBA |
| Low Temp Start | -15° C (-4° F) |
| Max Temp | 45° C (113° F) |
| Unit Weight | 4.1 lbs |

Lumen Maintenance

| Ambient Temperature | TM-21 Lumen Maintenance (54,000 hours) |
|---------------------|--|
| 25° C (77° F) | > 92.36% |
| Ambient Temperature | TM-21 Theoretical L70 (hours) |
| 25° C (77° F) | 230,000 |



ETI Solid State Lighting
720 Northgate Parkway, Wheeling, IL 60090

1.855.384.7754 www.ETISSL.com etiorders@ETISSL.com

All specifications are subject to change without notice.
All reported values are nominal or typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.