

4' WRAP LIGHT WITH MOTION SENSOR

MODEL#54676241-I | 3,628 LUMENS | 39.9W | 90.9LPW | 4000K



4' WRAP LIGHT WITH MOTION SENSOR  
**SUPERIOR VALUE & PERFORMANCE**



**PRODUCT OVERVIEW**

ETi SSL's 4ft. Wrap Light with built-in motion sensor offers a low profile space saving solution. It has a 4' profile length which makes it ideally suited for tight spaces. Ideal residential and commercial applications include, but are not limited to offices, multi-family, hallways and corridors, garages, storage rooms, workshops and more. The 4' Wrap Light is IC rated for direct contact with insulation. Integrated slip tabs allow for easy lens removal and quick connects make installation an ease.

Our 4' Wrap Light is DLC listed and delivers 3,628 lumens of extremely uniform ambient 4000K illumination. Installation is quick and easy with direct wiring and plug in options. Fixture is rated to operate reliably from -15° C (-4° F) and in high ambient 45° C (113° F) applications. The 4' Wrap Light provides long-lasting maintenance free operation thanks to its reported 92.36% lumen maintenance @ 54,000 hours and projected L70 @ 230,000 hours.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

**STOCK ORDERING INFORMATION** (typical 2-3 day shipment lead time)<sup>1</sup>

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	DLC <sup>2</sup>
WR-4-36-940-MV-D-OS	54676241-I	849489005164	4'	3,628	39.9	90.9	4000K	90 (min)	120-277V	0-10V	Yes

Notes:


1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Search first 6-digits of the model # followed by '##' on the DLC QPL...Ex. '546762##' to view DLC qualified SKUs.

# WR Series

4' Wrap Light With Motion Sensor

Model#54676241-1 | 3,628 Lumens | 39.9W | 90.9LPW | 4000K | DLC | 5 Year Warranty

## KEY DIMENSIONAL INFORMATION

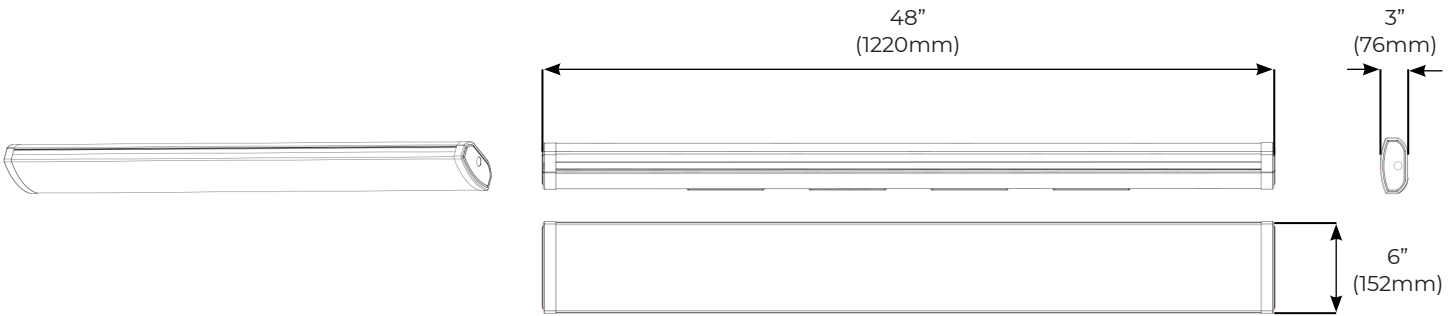

Note: All dimensions are shown in inches (millimeters).


## PHOTOMETRIC DETAILS

**Luminaire Data:** WR-4-36-940-MV-D-OS

IES File Name	<b>54676241-I.IES</b>
CCT & CRI	<b>4000K, 90CRI minimum</b>
Initial Delivered Lumens	<b>3,628</b>
Wattage	<b>39.9W</b>
Efficacy	<b>90.9</b>
Beam Angle	<b>50% = 111.1° 10% = 159.6°</b>
Spacing	<b>0° = 1.22 90° = 1.26</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79.

### Indoor Candela Plot

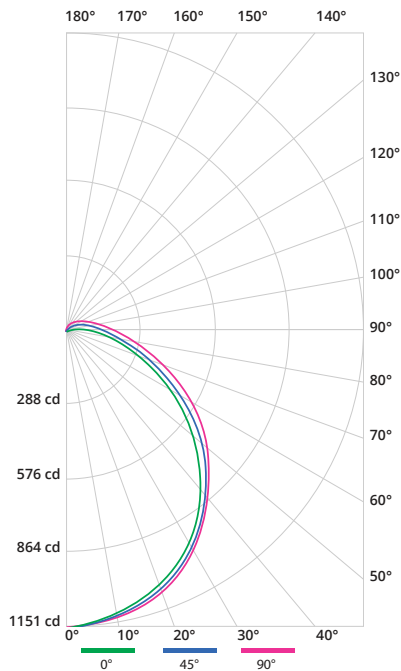

## BUILT-IN STOCK ACCESSORIES



**OC Sensor/BBU** (field installed)

Catalog Logic/PT#	Model #	Description
MC601V	90600144	IP20, UL listed, Square

## MISC. PRODUCT SPECS & DETAILS

### Load Information

<b>Power Factor</b>	> 0.90
<b>THD</b>	< 20%
<b>Frequency</b>	50/60 Hz
<b>Sound Rating</b>	< 20 dBA
<b>Low Temp Start</b>	-15° C (-4° F)
<b>Max Temp</b>	45° C (113° F)
<b>Unit Weight</b>	4.1 lbs

### Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)
25° C (77° F)	> 92.36%

Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	230,000

### Shipping Information

Unit Weight <sup>1</sup>	Size	Pallet <sup>2</sup>
4.1 lbs	4' unit	110 units

1. Case pack weighs 4.1 lbs (2 units / per case pack).  
2. There are 55 case packs per pallet.