

4' HIGH LUMEN OUTPUT WRAP LIGHT
MODEL#54677441 | 5,431 LUMENS | 52.8W | 102.8LPW | 4000K



4' HIGH LUMEN OUTPUT WRAP LIGHT **SUPERIOR** VALUE & PERFORMANCE



PRODUCT OVERVIEW

ETi SSL's 4ft. High Lumen Output Wrap Light offers a low profile space savings solution. It's compact form factor makes it ideally suited for tight spaces. Ideal residential and commercial applications include, but are not limited to offices, multi-family, hallways and corridors, garages, storage rooms, workshops and more. The 4' high output wrap light is IC rated for direct contact with insulation. Integrated slip tabs allow for easy lens removal. Installation is quick and easy with direct wiring and plug in options.

Our High Lumen Output Wrap Light is Energy Star rated and delivers 5,431 lumens of extremely uniform ambient 4000K illumination. Fixture is rated to operate reliably from -15° C (-4° F) and in high ambient 45° C (113° F) applications. The 4ft. High Lumen Output Wrap provides long-lasting maintenance free operation thanks to its reported 89.00% lumen maintenance @ 60,000 hours and projected L70 @ 180,000 hours.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	Energy Star ²
WR-4-57-940-MV-D	54677441	849489009995	4'	5,431	52.8	102.8	4000K	90 (min)	120-277V	0-10V	Yes

Notes:


1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Search first 6-digits of the model # followed by '##' on the ENERGY STAR® website database...(Ex '546774##') to view certifications.

WR Series

4' High Lumen Output Wrap Light

Model#54677441 | 5,431 Lumens | 52.8W | 102.8LPW | 4000K | ENERGY STAR® | 5 Year Warranty

KEY DIMENSIONAL INFORMATION

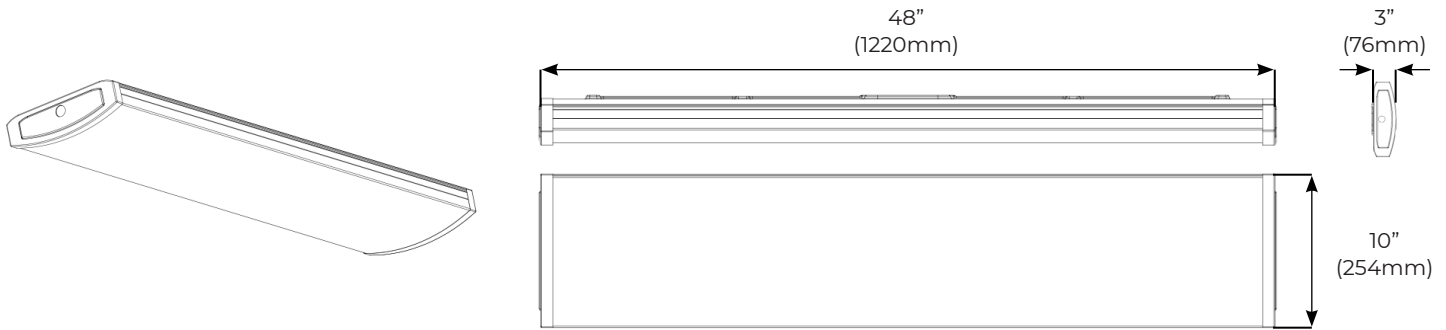

Note: All dimensions are shown in inches (millimeters).


PHOTOMETRIC DETAILS

Luminaire Data: WR-4-57-940-MV-D

IES File Name	54677441.IES
CCT & CRI	4000K, 90CRI minimum
Initial Delivered Lumens	5,431
Wattage	52.8W
Efficacy	102.8
Beam Angle	50% = 113.4° 10% = 163.3°
Spacing	0° = 1.26 90° = 1.26

Photometric values based on tests performed in compliance with LM-63 & LM-79.

Indoor Candela Plot

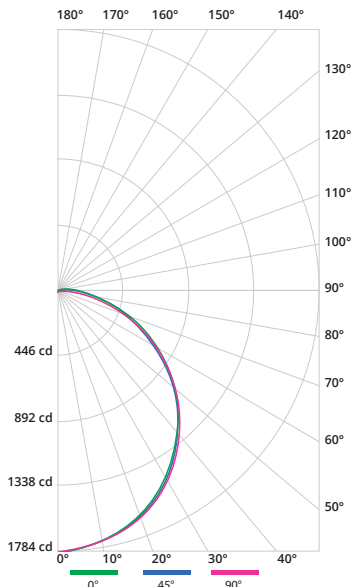

Shipping Information

Unit Weight ¹	Size	Case Pack
6.4 lbs	4' unit	2 units

1. Case pack weighs 12.8 lbs (2 units / per case pack).

AVAILABLE STOCK ACCESSORIES (must be ordered separately)



Emergency LED Driver/BBU (field installed)

Catalog Logic/PT#	Model #	Description
EMA25FY-170 (G2)	70112202	25W, IP rated, 90 minutes, Square
EMUFO-40170-YY (G2)	70114401	40W, IP rated, 90 minutes, Round
EMUFO-25170-YY (G3)	70112201-2	25W, IP rated, 90 minutes, Round
EMUFO-40170-YY (G3)	70114401-2	40W, IP rated, 90 minutes, Round
EMA25FY-170 (G3)	70112202-2	25W, IP rated, 90 minutes, Square
EMA40FY-170 (G3)	70114402-2	40W, IP rated, 90 minutes, Square
MC601V	90600144	IP20, UL listed, Square

MISC. PRODUCT SPECS & DETAILS

Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 dBA
Low Temp Start	-15° C (-4° F)
Max Temp	45° C (113° F)
Unit Weight	6.4 lbs

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)
25° C (77° F)	> 89.00%

Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	180,000