

4' COMPACT WRAP LIGHT

MODEL#56513141 | 3,640 LUMENS | 39.0W | 93.3LPW | 4000K



4' COMPACT WRAP LIGHT
SUPERIOR VALUE & PERFORMANCE



PRODUCT OVERVIEW

ETi SSL's 4ft. Compact Wrap Light offers an ultra low profile space saving solution. With an installed profile of 4" and a width of 5", it is ideally suited for spaces with limited availability to place light fixtures. The slim form factor makes this an ideal fixture for walk-in closet, kitchen, storage room, garage, or basement. This 4ft. Wrap Light has slip tabs for easy lens removal and quick connects for easy installation.

Our Compact Wrap Light is approved for use in damp locations and is Energy Star listed. It delivers 3,640 lumens of extremely uniform ambient 4000K illumination. Installation is quick and easy with direct wiring and plug in options. Fixture is rated to operate reliably from -15° C (-4° F) and in high ambient 45° C (113° F) applications. The 4ft. Compact Light provides long-lasting maintenance free operation thanks to its reported 87.62% lumen maintenance @ 60,000 hours and projected L70 @ 159,000 hours.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	Energy Star ²
WR-4-36-840-MV	56513141	849489003849	4'	3,640	39.0	93.3	4000K	80 (min)	120-277V	Non-dim	Yes

Notes:


1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Search first 6-digits of the model # followed by '##' on the ENERGY STAR® website database...(Ex '565131##') to view certifications.

WR Series

4' Compact Wrap Light

Model#56513141 | 3,640 Lumens | 39.0W | 93.3LPW | 4000K | ENERGY STAR® | 5 Year Warranty

KEY DIMENSIONAL INFORMATION

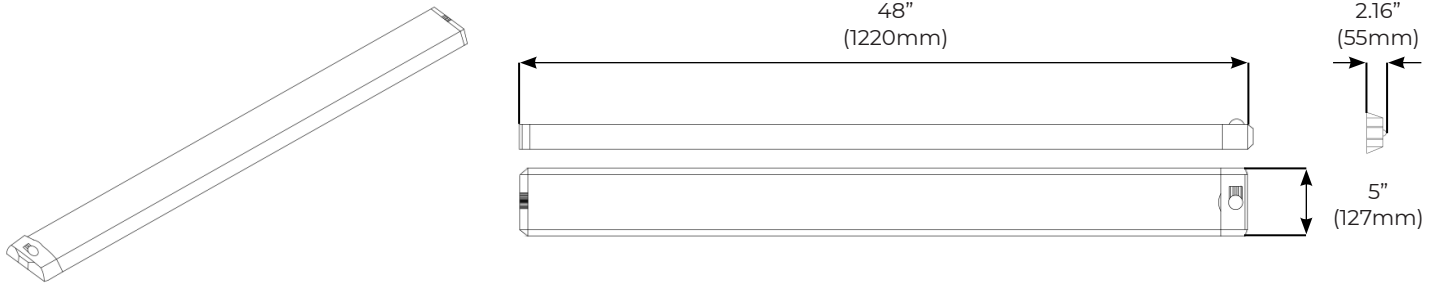

Note: All dimensions are shown in inches (millimeters).


PHOTOMETRIC DETAILS

Luminaire Data: WR-4-36-840-MV

IES File Name	56513141.IES
CCT & CRI	4000K, 80CRI minimum
Initial Delivered Lumens	3,640
Wattage	39.0W
Efficacy	93.3
Beam Angle	50% = 113.7° 10% = 164°
Spacing	0° = 1.24 90° = 1.28

Photometric values based on tests performed in compliance with LM-63 & LM-79.

Indoor Candela Plot

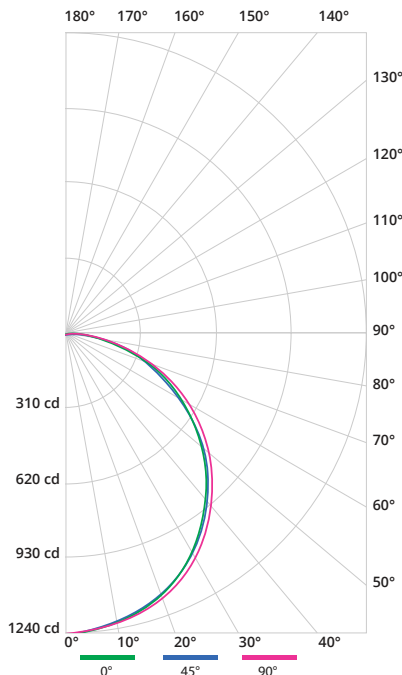

AVAILABLE STOCK ACCESSORIES (must be ordered separately)



Emergency LED Driver/BBU (field installed)

Catalog Logic/PT#	Model #	Description
EMUFO-40170-YY (G2)	70114401	40W, IP rated, 90 minutes, Round
EMUFO-40170-YY (G3)	70114401-2	40W, IP rated, 90 minutes, Round
EMA40FY-170 (G3)	70114402-2	40W, IP rated, 90 minutes, Square

MISC. PRODUCT SPECS & DETAILS

Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 dBA
Low Temp Start	-15° C (-4° F)
Max Temp	45° C (113° F)
Unit Weight	3.4 lbs

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)
25° C (77° F)	> 87.62%
Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	159,000

Shipping Information

Unit Weight ¹	Size	Pallet ²
3.4 lbs	4' unit	168 units

1. Case pack weighs 20.4 lbs (6 units / per case pack).
2. There are 28 case packs per pallet.



ETI Solid State Lighting
720 Northgate Parkway, Wheeling, IL 60090

1.855.384.7754 www.ETISSL.com etiorders@ETISSL.com

All specifications are subject to change without notice.
All reported values are nominal or typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.