

- > Energy Saving 40 Watt Integrated LED
- > Soft White 3000K CCT Cool White 4000K CCT Daylight 5000K CCT
- > Dusk-to-dawn on/off sensor
- > Lasts 45 years\* or 50,000 Hours Continuous Use
- > 5 Year Limited Warranty

## **Outdoor Color Preference® Area Light (Bronze)**

3500 lm | 120VAC | Model 53301111 | Part AL-40-802-SV-N-BZ



## **SPECIFICATIONS**

Model 53301111

Part AL-40-802-SV-N-BZ

Description Outdoor Color Preference® Area Light (Bronze)

Input Voltage (VAC) 120
Wattage 40
Dimmability NA

Average Rated Life<sup>1</sup> 50,000 hours

Typical Lumens<sup>2</sup> 3500

CCT<sup>3</sup> 3000K/4000K/5000K

Location RatingUL Wet $CRI^4$  $\geqslant 80$ Beam Angle $84^{\circ}$ 

Operating Temperature Min -4°F (-20° C), Max 113°F (45° C)

. . .

Power Factor >0.9 R9 12

 DUV
 -0.00195

 CBCP
 1783

 Operating Frequency (Hz)
 60

- 1 Hours lifetime with 70% lumen maintenance
- 2 Thermally stable typical lumens (±10%)
- 3 Thermally stable CCT (±10%)
- 4 Color rendering index/Ra




TO ORDER:









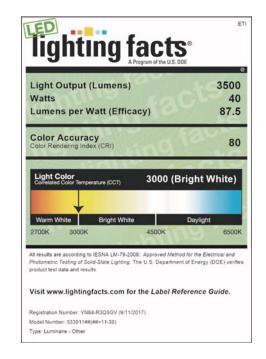



## **Outdoor Color Preference® Area Light (Bronze)**

3500 lm | 120VAC | Model 53301111 | Part AL-40-802-SV-N-BZ

## SHIPPING INFORMATION

Model 53301111

Part AL-40-802-SV-N-BZ UPC 849489009902

Product Dimensions (L x W x H in.) 10 5/8 x 3 1/32 x 7 63/64

Product Dimensions (L x W x H cm.) 27 x 7.7 x 20.3

Product Weight (lbs.)

Inner Carton Quantity

N/A

Inner Carton Bar Code

N/A

Inner Carton Dimensions (L x W x H in.)

N/A

Inner Carton Dimensions (L x W x H cm.)

N/A

Inner Carton Weight (lbs)

N/A

Master Carton Quantity

4

Master Carton Bar Code 50849489009907

Master Carton Dimensions (L x W x H in.) 3' 5 1/2 x 1' 11 29/32 x 2' 7 19/32

Master Carton Dimensions (L x W x H cm.) 105.41 x 60.71 x 80.26

Master Carton Weight (lbs) 15.95
Pallet Quantity 336

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.ETiSSL.com/fcc15b

TO ORDER: www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754 ETi Solid State Lighting, Inc. 720 Corporate Woods Parkway Vernon Hills, IL 60061 Phone: 855.384.7754 Fax: 847.383.6256