

Recessed Downlights

Color Preference® Downlights New Construction, Remodel, & Retrofit



Model # 53801102 shown

ETI ADVANTAGE

Featured Product: 30-in-1 Downlight

LUMEN BOOST

3 x Level Lumen Adjust

2 x Trim Rings Black & White

COLOR PREFERENCE®

5 x CCT Selectable

Six Additional CP Models Available



Featured Models:

4" 15w, Up to 1000 Lm
Model # 53802102

6" 17w, Up to 1100 Lm
Model # 53801102

- ✓ COLOR PREFERENCE® models-Select from up to 5 individual CCT Choices
- ✓ Suitable for New Construction & Retrofit Installations
- ✓ Auto-Dim Thermal Protected
- ✓ IC Insulation Contact Rated
- ✓ UL Wet Rated

LIGHTING CONTROL AND SAFETY




70112202 • Emergency LED Driver/BBU



AVAILABLE MODELS

Retrofit Downlight Kits

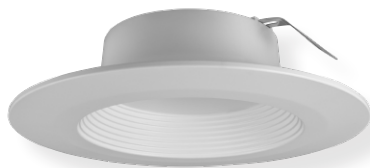

*Model # 53186311 shown

SPECIFICATIONS

- ✓ 120V
- ✓ >90CRI
- ✓ TRIAC Dimmable
- ✓ L70 >50,000
- ✓ 5 Year limited warranty

Commercial/Can-less



Model # 53189111 shown

SPECIFICATIONS

- ✓ 120-277V
- ✓ >90CRI
- ✓ 0-10V Dimming
- ✓ L70 >50,000
- ✓ 5 Year limited warranty

30-in-1 Downlight COLOR PREFERENCE® + LUMEN BOOST® 2700K, 3000K, 3500K, 4000K, or 5000K 3 x Lumen Select & 2 x Trim Rings	4" 15w, 600-1000 Lumens PN: DL-4-10-907-SV-D, 53802102
	6" 17w, 700-1100 Lumens PN: DL-6-11-907-SV-D, 53801102
4" & 5/6" Downlight COLOR PREFERENCE® 2700K, 3000K, or 4000K 3 x CCT Color Selectable	4" 10w, 625 Lumens PN: DL-4-10-901-SV-D, 53185142
	5"/6" 11w, 800 Lumens PN: DL-6-80-901-SV-D, 53186401
4" & 5/6" Downlight COLOR PREFERENCE® 3000K, 4000K, or 5000K 3 x CCT Color Selectable	4" 10w, 625 Lumens PN: DL-4-10-902-SV-D, 53185143
	5"/6" 11w, 800 Lumens PN: DL-6-80-902-SV-D, 53186311


COLOR PREFERENCE® 3000K, 3500K, 4000K, or 5000K	5"/6" 14w, 800 Lumen PN: DL-6-80-903-MV-D, 53192211
	8"/10" 40w, 3000 Lumen PN: DL-8-30-903-MV-D, 53189111
Accessory for 8"/10"	10" Trim Ring PN: DL-10TR, 90600193

*Model # 53186311 & 53186401 do not include torsion springs - accessory kit sold separately
E26 adapter still included

Recessed Downlights

Project:
Part Number:

PART NUMBER GUIDE



PRODUCT/SKU DETAILS

GENERAL SPECIFICATIONS:

Voltage	120VAC*	Frequency	50/60 Hz.	CRI	90
Power Factor	>.90	THD	< 20%	Rating	cULus Wet
Temperature	-4°F to +104°F	Rated Life	50,000 hrs.	Warranty	5 Year Limited

*120-277V on Commercial/Can-less models

ORDERING GUIDE

Part #	Model #	Description	Replaces	LED Watts	Lumens	LPW	CCT	Product Dim.	CRI	Input Voltage	Case Pack
DL-4-10-907-SV-D	53802102	4" 30-in-1 COLOR PREFERENCE® Downlight with Lumen Select - TRIAC Dimmable	65/75/85w Par	15w	600 / 800 / 1000	N/A	27 / 30 / 35 / 40 / 5000K	4.92 x 3.14 in.	90	120V	4
DL-6-11-907-SV-D	53801102	6" 30-in-1 COLOR PREFERENCE® Downlight with Lumen Select - TRIAC Dimmable	65/75/85w Par	17w	700 / 900 / 1100	N/A	27 / 30 / 35 / 40 / 5000K	7.48 x 3.64 in.	90	120V	4
DL-4-10-902-SV-D	53185143	4" COLOR PREFERENCE® Downlight - TRIAC Dimmable	65w Par	10w	625	63	30 / 40 / 5000K	4.92 x 2.51 in.	90	120V	4
DL-4-10-901-SV-D	53185142	4" COLOR PREFERENCE® Downlight - TRIAC Dimmable	65w Par	10w	625	63	27 / 30 / 4000K	4.92 x 2.51 in.	90	120V	4
DL-6-80-901-SV-D	53186401	5"/6" COLOR PREFERENCE® Downlight - TRIAC Dimmable	65w Par	8.5w	800	73	27 / 30 / 4000K	7.48 x 3.15 in.	90	120V	4
DL-6-80-902-SV-D	53186311	5"/6" COLOR PREFERENCE® Downlight - TRIAC Dimmable	65w Par	8.5w	800	73	30 / 40 / 5000K	7.48 x 3.15 in.	90	120V	4
DL-6-80-903-MV-D*	53192211	5"/6" COLOR PREFERENCE® Downlight, 0-10V Dimmable	65w Par	14w	800	57	30 / 35 / 40 / 5000K	7.48 x 4.45 in.	90	120-277V	4
DL-8-30-903-MV-D*	53189111	8"/10" COLOR PREFERENCE® Downlight, 0-10V Dimmable	150w	40w	3,000	75	30 / 35 / 40 / 5000K	9.74 x 4.25 in.	90	120-277V	4
Accessories											
EMA 25FY-170	70112202	Emergency LED Driver - Compatible w/ all shown models	N/A	25w	N/A	N/A	N/A	12.4 x 2.3 x 1.5 in.		100-347V	10
DL-10TR	90600193	10" Trim for COLOR PREFERENCE® Downlight	N/A	N/A	N/A	N/A	N/A	Outer Dia 11.75 in Inner Dia 8.125 in	N/A	N/A	20
NA	953186311-B01	Torsion Spring Kit - Compatible with 53186311 & 53186401	N/A	N/A	N/A	N/A	N/A				1

COMPATIBLE DIMMERS (TRIAC MODELS ONLY)

ETI MODELS 53802102, 53801102:

LUTRON: DVCL-153, CTCL-153P, TGCL-153P, MACL-153M, PD-6WCL, LECL-153, SCL-153P, NTCL-250, GT-150

LEVITON: 6674, 6672, IPL06-10Z, DSL06-1LZ, TSL06, RDL06

EATON: SAL06P2 COOPER: DLC03P, SUT7, TAL06P2

ETI MODELS 53185143, 53185142, 53186401, 53186311:

LUTRON: CT-603PGH-WH, DVCL-153PR-WH, GL-600H-DK, MSCL-OP153M, MACL-153MH-WH, SCL-153PR-WH, TGCL-153PR-WH, TGCL-153PH-WH, TG-603PGH-WH, AYCL-153P-WH

LEVITON: CD-C22-06672-12A, CD-R62-06674-12A, CD-R50-IPL06-12A, 81000-I, SB-011-IPL06-22A

CANS:

COMMERCIAL ELECTRIC: H1, H2, H3, H4, H5, H6, H7, H8, H15, H16, H17, H18, H21

JUNO: IC20, IC21, IC22, IC20R, IC2R, IC22R

HALO: H5T, H5RT, H5ICAT, H5RICAT, H5ICT, H5RICT, H7RICT, H7ICAT, H7RICAT, H7ICT, H7T, H7RT, H27ICT, H27T, H27RT, H750ICAT, H750RICAT

PACKAGING SPECIFICATIONS

Part #	Model #	UPC	UCC	Inner Carton Dimensions	Inner Carton Weight	Shipper/Master Carton Dimensions	Shipper/Master Carton Weight
DL-4-10-907-SV-D	53802102	849489004044	50849489004049	5.7 x 3.6 x 5.7 in.	0.7 lbs.	15.0 x 6.3 x 6.4 in.	3.2 lbs.
DL-6-11-907-SV-D	53801102	849489004051	50849489004056	7.9 x 4.3 x 7.9 in.	1.0 lbs.	17.6 x 8.8 x 8.6 in.	5.5 lbs.
DL-4-10-902-SV-D	53185143	849489006338	50849489006333	5.4 x 3.6 x 6.5 in.	0.5 lbs.	15.2 x 6 x 7.3 in.	3.1 lbs.
DL-4-10-901-SV-D	53185142	849489003252	50849489003257	5.4 x 3.6 x 6.5 in.	0.5 lbs.	15.2 x 6 x 7.3 in.	3.1 lbs.
DL-6-80-901-SV-D	53186401	849489006352	50849489006357	8.9 x 3.7 x 8.9 in.	1.0 lbs.	15.5 x 9.5 x 9.6 in.	5.6 lbs.
DL-6-80-902-SV-D	53186311	849489003511	50849489003516	8.9 x 3.7 x 8.9 in.	1.0 lbs.	15.5 x 9.5 x 9.6 in.	5.6 lbs.
DL-6-80-903-MV-D	53192211	849489003528	50849489003523	8.1 x 5.3 x 8.1 in.	1.7 lbs.	22.1 x 8.6 x 8.7 in.	6.59 lbs.
DL-8-30-903-MV-D	53189111	849489006383	50849489006388	10.4 x 5.0 x 10.4 in.	2.1 lbs.	21.8 x 11.6 x 11.6 in.	10.3 lbs.
Accessories							
EMA 25FY-170	70112202	849489064475	50849489064470	15.8 x 5.4 x 1.9 in.	2.6 lbs.	16.5 x 11.4 x 10.2 in.	26.8 lbs.
DL-10TR	90600193	849489009940			N/A		