

# Residential Wall Pack

# Residential Wall Pack With Color Preference® Technology and 2-Step Motion Sensor



## 22w Residential Wall Pack

- Hi-Lo Feature: 50% brightness at dusk, 100% brightness when motion is detected
- Dusk-to-dawn, worry free operation
- 3CCT Color Preference® Technology

## Compact 9" Design

**ETI** ADVANTAGE



**COLOR PREFERENCE**®



## 22w Residential Wall Pack

22w, up to 2370 lumens, 120-277V

Bronze finish

Model #: 53901111

P/N: WP-8IN-2350LM-8-CP3-MV-0S-BZ

**Turns on 1175 Lm at dusk with Lumen Setting to 2250 Lm when motion is detected**




## Features & Specifications

- Maximum 22w (when motion is detected)
- 1175-2350 Lumen output
- Dusk-to-dawn photocell
- Motion Sensor with adjustable timer (2/5/15 minutes on-time)
- 3CCT Color Preference® 3000K, 4000K, or 5000K color switch
- 120-277V
- 50,000 hours of rated LED life
- Durable, all-weather construction
- IP65 rated, suitable for wet location

# Residential Wall Pack

Project:   
Part Number:

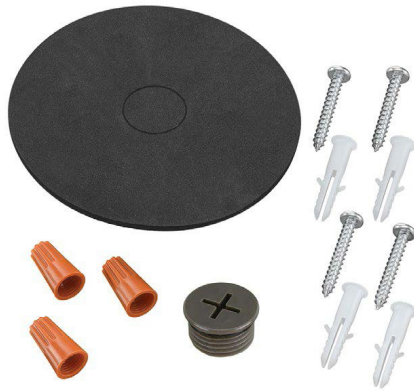

## PART NUMBER GUIDE

CATEGORY	SIZE	LUMENS	CRI	CCT	VOLTAGE	OPTION	FINISH
WP	8IN	2350LM	8	CP3	MV	OS	BZ

## PRODUCT/SKU DETAILS

### GENERAL SPECIFICATIONS:

<b>Voltage</b>	120-277VAC	<b>Frequency</b>	50/60 Hz.	<b>CRI</b>	80
<b>Power Factor</b>	>.90	<b>THD</b>	< 20%	<b>Rating</b>	cULus Wet
<b>Temperature</b>	-40°F to +113°F	<b>Rated Life</b>	50,000 hrs.	<b>Warranty</b>	5 Year Limited

## ORDERING GUIDE

Part #	Model #	Description	LED Watts	Lumens	CCT	CRI	Voltage	Product Dimensions	Case Pack
WP-8IN-2350LM-8-CP3-MV-OS-BZ	53901111	Residential Wall Pack with motion sensor, bi-level 1175/2350 lumen light output, 3CCT Color Preference® Technology	22w	1175 lm/ 2350 lm	3000K/ 4000K/ 5000K	80	120-277V	8.3 x 5.5 x 3.6 in.	4

## PACKAGING SPECIFICATIONS

Part #	Model #	UPC	UCC	Product Carton Dimensions	Product Carton Weight	Shipper Carton Dimensions	Shipper Carton Weight
WP-8IN-2350LM-8-CP3-MV-OS-BZ	53901111	849489064062	50849489064067	9.2 x 4.3 x 6.6 in.		18.2 x 9.7 x 7.3 in.	