

LINKABLE MAGNETIC SHELF &
UNDERCABINET LIGHT

MODEL# 535091610 | 1,050LUMENS | 12.08W | 87LPW | 5000K



*Connect up to 10 fixtures
with the included linking cable

LINKABLE MAGNETIC SHELF & UNDERCABINET LIGHT
SUPERIOR VALUE & PERFORMANCE



PRODUCT OVERVIEW

ETi SSL's 40" Linkable Magnetic Shelf & Undercabinet Light provides efficient and economical ambient illumination with a sleek and modern ultra-thin profile. With an installed profile height of 0.6", this fixture is ideally suited for under cabinets and shelves to easily blend into any environment. Connect multiple fixtures with the included linking cable to allow all of your fixtures to be powered and controlled from a single switch while minimizing cord clutter. A maximum of 10 fixtures can be linked creating an aesthetically and functionally ideal use in many spaces. All ETi SSL products are engineered using the latest innovative LED technologies to help provide the perfect mix of modern design, performance, world class quality and product reliability. All at a superior value to the designer, specifier, contractor and end-user.

Our Linkable Magnetic Shelf & Undercabinet Light series is Energy Star® rated and delivers 1050 lumens of extremely uniform ambient 5000K illumination. Installation is quick and easy thanks to the magnetic strips or mounting screws. Fixture is rated to operate reliably from -25° C (-13° F) and in high ambient 45° C (113° F) applications. The Magnetic Shelf Light series provide long-lasting maintenance free operation thanks to its reported 89.58% lumen maintenance at 54,000 hours and projected L70 at 171,000 hours. Ideal applications include, but are not limited to office cubicle cabinets, retail & grocery store gondola shelving, boutiques, restaurants, under cabinets, pantry or food storage areas and more.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	Energy Star® ²
UC-40IN-1000LM-9-50K-SV	535091610	849489066042	40"	1050	12.08	87	5000K	90 (min)	120V	Non-Dim	Yes

Notes:

1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Search first 6-digits of the model # followed by '##' on the ENERGY STAR® website database...(Ex. '5350916##') to view certifications.


UC Series

Linkable Magnetic Shelf & Undercabinet Light

Model# 535091610 | 1,050Lumens | 12.08W | 87LPW | 5000K | ENERGY STAR® | 5-yr Warranty

CATALOG LOGIC | PART# DECODER^{1,2,3}


UC-40IN-1000LM-9-50K-SV (Model # 535091610)

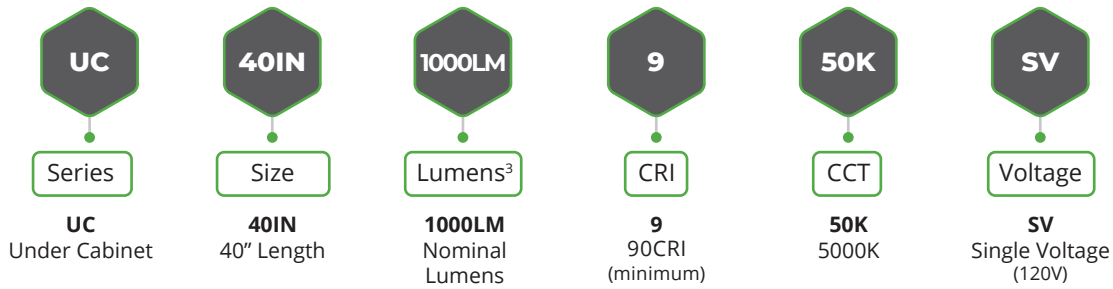

Notes:

1. This product is not configurable, only designated 'Stock' SKUs are available.
2. Decoder is to help clarify Catalog Logic|Part # configurations only (see Stock & Rapid Ship Ordering Information for available SKUs).
3. Lumen values shown are nominal (see Stock Ordering Information or Photometric Details sections for additional performance details).

KEY DIMENSIONAL INFORMATION

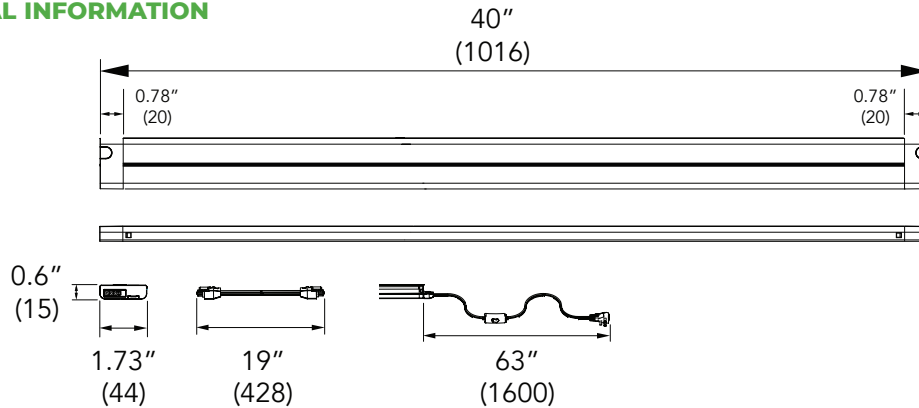

Note: All dimensions are shown in inches (millimeters).

MISCELLANEOUS PRODUCT SPECS & DETAILS

Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 Dba
Low Temp Start	-25° C (-13° F)
Max Temp	45° C (113° F)
Unit Weight	1.12 lbs

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 89.58%
Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	171,000

Shipping Information*

Size	Unit Weight¹	Pallet²
40" unit	1.43 lbs	540 units per pallet

1. Case pack weighs 9.59 lbs (6 units / per case pack).
2. There are 90 case packs per pallet.

PHOTOMETRIC DETAILS

Luminaire Data: UC-40IN-1000LM-9-50K-SV

IES File Name	535091610.IES
CCT & CRI	5000K, 90CRI minimum
Initial Delivered Lumens	1,050
Wattage	12.08W
Efficacy	87
Beam Angle	50% = 121° 10% = 158°
Spacing	0° = 1.54 90° = 1.26

Photometric values based on tests performed in compliance with LM-63 & LM-79

Indoor Candela Plot

