

**VT SERIES 4' VAPOR TIGHT HYBRID**  
NARROW WIDTH (Less than 2.5")  
Lumens 3737 | Efficacy up to 118

**KEY FEATURES**

ETi SSL's 4-FT strip-style Vapor Tight Hybrid luminaire is weatherproof and rated IP65 so it is dust tight and protected against projected water. Fixture can be hard wired or used with included plug-in cord, and can be mounted suspended, surface and up to 8 units can be linked together.

**CCT & Light Quality**

- 4000K, 80+ CRI

**Light Output & Efficacy**

- 3737 Delivered Lumens
- Efficacy Rating of 118 LPW
- 87.32% lumen maintenance @ 54,000 hours and projected L70 @ 138,000 hours

**SPECIFICATIONS**

**Construction**

- Integrated, molded polycarbonate housing and lens
- Airtight seal prevents moisture and dirt from compromising the housing and damaging interior wires and components

**Optics**

- Non-yellowing high-impact resistant polycarbonate lens
- Frosted diffuser delivers even illumination and diminished glare

**Installation**

- Suspension and surface mounting kits included
- Link together up to 8 luminaires
- Hard wire or use included plug-in cord

**Electrical**


- 138,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60 Hz
- Non-Dimmable

**Warranty**

5-Year Standard Warranty. See terms at: [ETiSSL.com/warranty/](https://ETiSSL.com/warranty/)

KEY DATA	
Lumens	3737
Wattage	31.7
Efficacy (LPW)	117.8
Reported Life (Hours)	L70 / 138,000

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

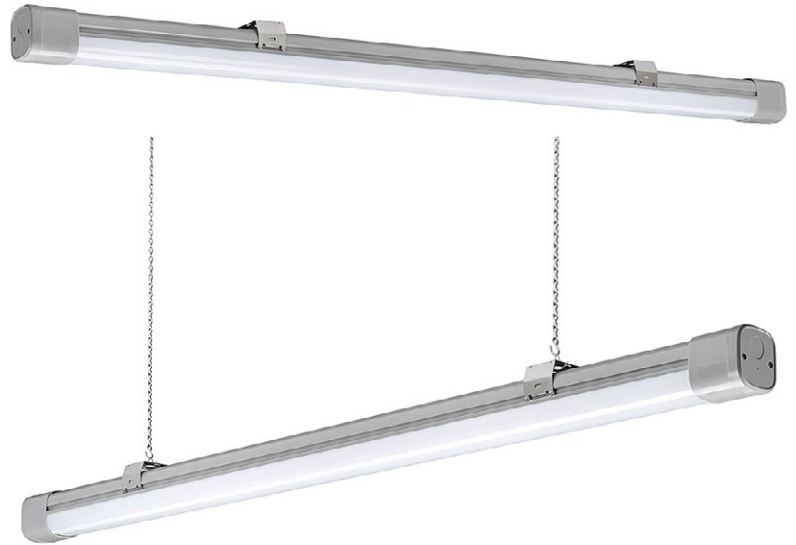

Hard wire or  
use included  
plug-in cord




**Certifications & Test Data**

- All luminaires are built to UL standards and have the appropriate UL labels and information on product
- Wet location—IP65 Rated
- Adheres to LM79, LM80, and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- ENERGY STAR® rated (See Page 2 for search info.)
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



CATALOG LOGIC

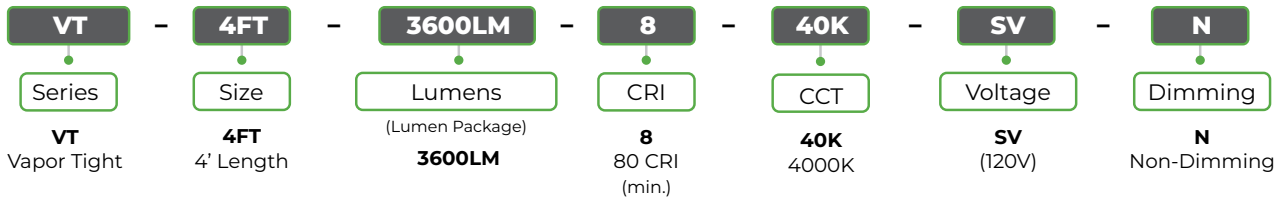


STANDARD STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)<sup>1</sup>



Catalog Part Number	Order Number	Description	Lumen Package	Delivered Lumens <sup>2</sup>	Nominal Wattage	Efficacy	CCT	CRI	Voltage	Dim	ENERGY STAR®
VT-4FT-3600LM-8-40K-SV-N	56574142	4' Vapor Tight, 4000K	3600	3737	32	118	4000K	80+	120V	Non-Dim	Yes Search: 565741##

Notes: 1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order  
2. For more delivered lumens and test data see on page 3, or visit ETISSL.com

MOUNTING



Link up to 8 fixtures

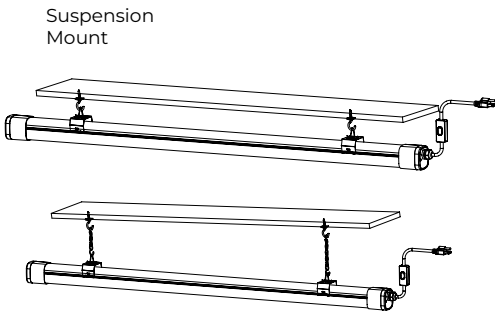


Included with the product



- Mounting Screws
- Dry Wall Anchors
- U Brackets
- V Clips
- 2 Suspension Chains
- S Hooks

DIMENSIONS / DETAILS

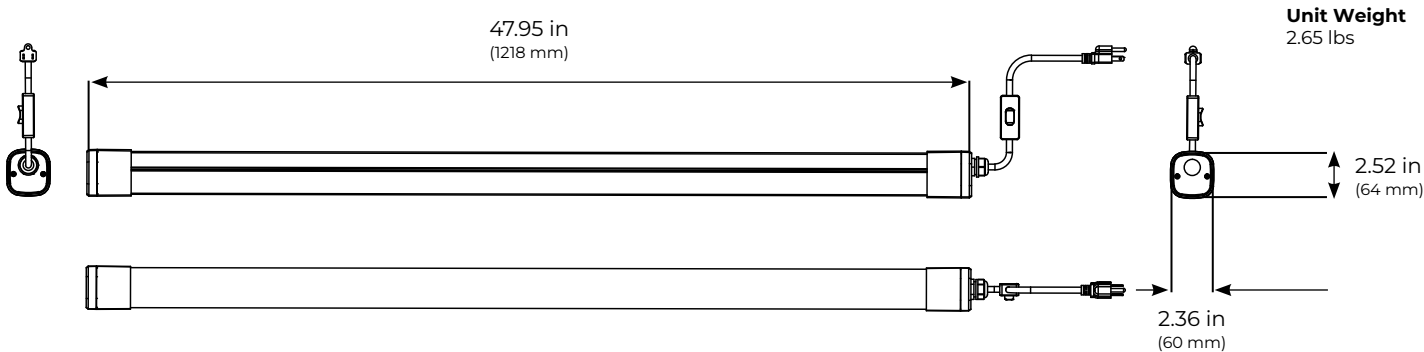

PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	87.32%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	138,000

Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 dBA
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)

PHOTOMETRIC SAMPLE



Luminaire Data: 4000K

CCT & CRI	4000K, 80+ CRI
Initial Delivered Lumens	3737
Wattage	31.7W
Efficacy	117.8
Beam Angle	50% = 126.8° 10% = 170.6°
Spacing	0° = 1.36 90° = 1.30

Photometric values based on tests performed in compliance with LM-63 & LM-79

Indoor Candela Plot

