


4' ECO WRAP LIGHT WITH OC SENSOR

MODEL# 56513242 | 3,705 LUMENS | 39.9 W | 92.8 LPW | 4000 K

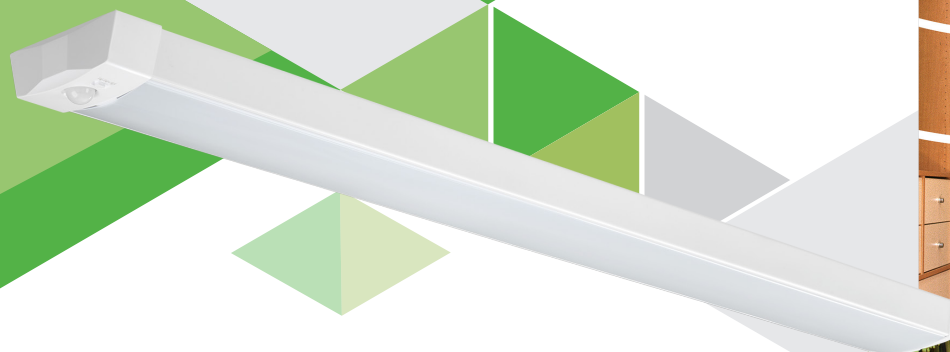

Integrated Motion Sensor

4' ECO WRAP LIGHT WITH OC SENSOR

SUPERIOR VALUE & PERFORMANCE



PRODUCT OVERVIEW

ETi SSL's 4ft. ECO Wrap Light with OC Sensor offers a low profile space saving solution with adjustable capabilities that save you time and money. This fixture replaces fluorescent bulbs with energy-efficient LEDs. The compact form factor makes this an ideal light fixture for walk-in closet, kitchen, storage room, garage, or basement. It is equipped with a motion sensor that is easily adjusted to control your desired hold time, 2 min or 10min. The 4ft ECO Wrap motion sensor can also be disabled providing the option for traditional wiring.

Our ECO Wrap Light is approved for use in damp locations and delivers 3,705 lumens of extremely uniform ambient 4000K illumination. With our integrated Color Preference[®] technology, you are able to choose between three color temperatures.. The 4ft. ECO Wrap Light provides long-lasting maintenance free operation thanks to its reported 90.29% lumen maintenance @ 50,000 hours and projected L70 @ 171,000 hours.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETi SSL.

STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT	CRI	Voltage	Dimming	Energy Star ²
WR-4FT-3600LM-8-40K-SV-N	56513242	849489067056	4'	3,705	39.9	92.8	4000K	80 (min)	120V	Non-Dim	Yes

Notes:

1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.

2. Search first 6-digits of the model # followed by '##' on the ENERGY STAR[®] website database...(Ex. '565132##') to view certifications.

ECO Series

4' ECO Wrap Light With OC Sensor

Model#56513242 | 3,705 Lumens | 39.9 W | 92.8 LPW | 4000 K | 5 Year Warranty

CATALOG LOGIC | PART# DECODER^{1,2,3}

WR-4FT-3600LM-8-40K-SV-N (Model # 56513242)



Series

WR
Wrap



Size

4FT
4' Length



Lumens³

3600LM
Nominal Lumens



CRI

8
80CRI
(minimum)



CCT

40K
4000K



Voltage

SV
Single Voltage
(120V)



Dimming

N
Non-Dimming


Notes:

1. This product is not configurable, only designated 'Stock' SKUs are available.

2. Decoder is to help clarify Catalog Logic|Part # configurations only (see Stock Ordering Information for available SKUs).

3. Lumen values shown are nominal (see Stock Ordering Information or Photometric Details sections for additional performance details).

KEY DIMENSIONAL INFORMATION

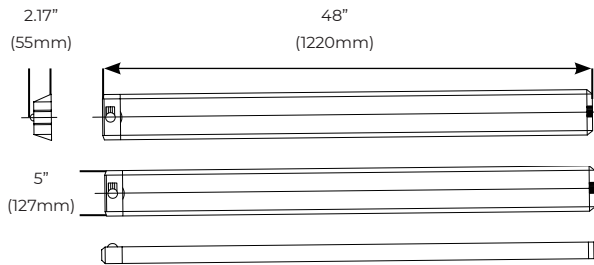

Note: All dimensions are shown in inches (millimeters).

AVAILABLE STOCK ACCESSORIES

(must be ordered separately)



Emergency LED Driver/BBU (field installed)

Catalog Logic/PT#	Model #	Description
EMUFO-40170-YY (G2)	70114401	40W, IP rated, 90 minutes, Round

MISCELLANEOUS PRODUCT SPECS & DETAILS

Load Information

Power Factor	0.9
THD	< 20%
Frequency	60 Hz
Sound Rating	< 20 Dba
Low Temp Start	-20° C (-4° F)
Max Temp	45° C (113° F)
Unit Weight	3.53 lbs

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (50,000 hours)
25° C (77° F)	> 90.29%
Ambient Temperature	TM-21 Theoretical L70 (hours)
25° C (77° F)	171,000

Shipping Information^{*}

Size	Unit Weight ¹	Carton Dimensions (in.)
4' unit	3.53 lbs	50.47 X 7.2 x 4.05

1. Case pack weighs 7.06 lbs (2 units / per case pack).

PHOTOMETRIC DETAILS

Luminaire Data: WR-4FT-3600LM-8-40K-SV-N

IES File Name	56513242.IES
CCT & CRI	4000 K, 80CRI minimum
Initial Delivered Lumens	3,705
Wattage	39.9 W
Efficacy	92.8
Beam Angle	50° = 113.9° 10° = 163.1°
Spacing	0° = 1.22 90° = 1.32

Photometric values based on tests performed in compliance with LM-63 & LM-79.

Indoor Candela Plot

