

32" LED OVAL FLUSH MOUNT
3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™

KEY FEATURES

- Low profile design with decorative beveled trim
- 50,000-hour life
- TRIAC Dimming
- Adjust night light (Amber 2000K) with wall switch or dimmer
- 3 Field adjustable CCT (3000K/4000K/5000K)
- Ultra-thin 1.29" surface profile

SPECIFICATIONS

Construction

- Thin panel with decorative brushed nickel beveled trim
- Frosted Lens

Optics

- Acrylic diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation and Function

- Surface mount kit included:
 - 6 Mounting Screws
 - 3 Wire Connectors
 - 6 Drywall Anchors
 - 2 Safety Cables
 - 4 Pins
 - Location Paper and Lever

Electrical

- 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operating temperature: -4°F ~ 113°F
- Triac dimming, down to 10%*
- ETi SSL's patented 3 CCT COLOR PREFERENCE® allowing for easy field-adjustable lighting output with switch located on product back

*Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty. See terms at: ETISSL.com/warranty/

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



KEY DATA	
Lumen Range	3164 – 3304
Wattage Range	38.9 – 39.0
Efficacy Range (LPW)	74-97
Reported Life (Hours)	L70 / >50,000

Certifications & Test Data

- All luminaires are built to UL 1598 standards and have the appropriate UL labels and information on product
- Damp location rated
- ENERGY STAR® rated (See Page 2 for search info.)
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- RoHS Compliant



32" LED Oval Flush Mount 3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™

CATALOG LOGIC

FMNL	-	32IN	-	3000LM	-	8	-	CP3	-	SV	-	TD	-	BN
Series		Size		Lumens (Lumen Package)		CRI		CCT		Voltage		Dimming		Finish
FMNL Oval Flush Mount with Nightlighter®		32IN (23" Dia)		3000LM		8 80CRI (min.)		CP3 3 CCT Color Preference® 3/4/5000K		SV Single-Volt 120V		TD TRIAC Dimming		BN Brushed Nickel


Notes: 1. This product is not configurable, only designated 'Stock' SKUs are available. 2. Factory set at 3000K. Installing contractor responsible for ensuring desired CCT is selected during installation.

STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

Catalog Part Number	Order #	Product Description	Case QTY	Wattage (Nominal)	Nightlight Wattage	Lm Pkg	Delivered Lumens ²	Efficacy (LPW)	CCT	CRI	Volt.	Dim	ENERGY STAR®
FMNL-32IN-3000LM-8-CP3-SV-TD-BN	56587114	32" Oval Flush Mount with Brushed Nickel Trim & Nightlight	2	40	18	3000	3164	81	3000K	80+	120V	TRIAC	Yes, Search: 565871##
							3302	85	4000K				
							3304	85	5000K				

Notes: 1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order 2. For more delivered lumens and test data see below, or visit ETISSSL.com

DIMENSIONS / DETAILS

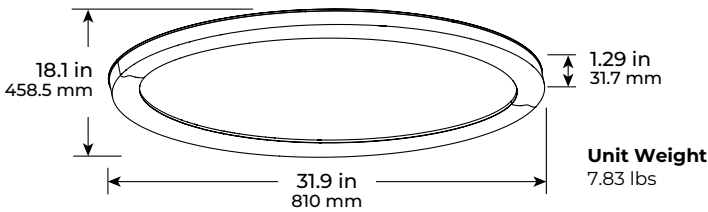


Factory settings: 3000K

NightLightR™

Night light mode function:

Regular Light Mode > Night Light Mode

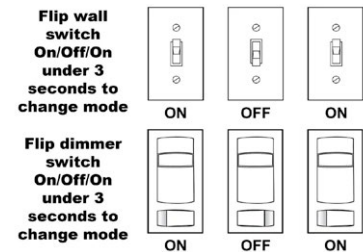

INSTALLATION KIT




PHOTOMETRIC SAMPLE

Luminaire Data: at 3000K

CCT & CRI	3000K, 80+ CRI
Delivered Lumens	3164
Wattage	38.9W
Efficacy	81
Beam Angle	50%=111° 10%=162°
Spacing	0° = 1.30 90° = 1.24

Candela Plot



Photometric values based on tests performed in compliance with LM-63 & LM-79