

**3' SHOP LIGHT**  
WITH PULL STRING  
4000K | 3049 DELIVERED LUMENS

**KEY FEATURES**

Luminaire features 20-inch built-in pull chain with easy-to-grab ETi finial and has a clear lens with optic design that helps lower glare.

**CCT & Light Quality**

- CCT 4000K, 80+ CRI

**Light Output & Efficacy**

- High Lumen Package: 3000 lm
- Efficacy Rating: 94 LPW

**SPECIFICATIONS**

**Construction & Optics**

- White metal housing
- Clear lens with optic design to reduce glare

**Installation**

- Comes with suspension mounting kit and 5 ft. power cord

**Electrical**

- 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operation Temperature: -20°C (-4°F) / 45°C (113°F)
- Non-Dimmable

**Warranty**

5-Year Standard Warranty. See terms at: [ETiSSL.com/warranty/](https://ETiSSL.com/warranty/)



KEY DATA	
Lumens	3049
Wattage	30.95
Efficacy Range (LPW)	99
Reported Life (Hours)	L70 / 60,000

**Certifications & Test Data**

- All luminaires are UL listed and are built for damp location use
- Adheres to LM79, and TM30 industry standards for photometric, lumen maintenance and lifetime calculations
- ENERGY STAR® Qualified
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- RoHS Compliant
- IC Rated for direct contact with insulation



3' Shop Light WITH PULL STRING | 4000K | 3049 DELIVERED LUMENS

CATALOG LOGIC

SHPC

Series

SHPC  
Shop Light  
with Pull Chain

-

3FT

Size

3FT

-

3000LM

Lumens

(Nominal)  
3000LM

-

8

CRI

8  
80CRI  
(min.)

-

40K

CCT

40K  
4000K

-

SV

Voltage

SV  
Single-Volt  
120V


Notes:  
1. This product is not configurable. Only designated 'Stock' SKUs are available.

STANDARD STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)<sup>1</sup>

Catalog Part Number	Order Number	Description	Case QTY	Lumen Package	Delivered Lumens <sup>2</sup>	Wattage (Nominal)	Efficacy	CCT	CRI	Voltage	Dimming	ENERGY STAR®
SHPC-3FT-3000LM-8-40K-SV	55702142	3' Shop Light with Pull String	4	3000	3049	32	99	4000K	80+	120V	Non-Dim	Yes, Search: 557021##

Notes: 1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order. 2. For more delivered lumens and test data see below, or visit ETiSSL.com

DIMENSIONS / DETAILS

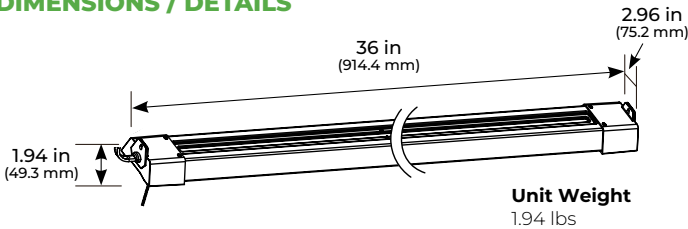


Installation Kit



- Includes:
- 1 - 5 ft. Power Cord (attached to fixture)
  - 2 - Mounting Chains with S Hooks
  - 2 - Drywall Anchors
  - 2 - Hook Screws

MOUNTING



PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	60,000

Load Information

Power Factor	0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-20°C (-4°F) / 45°C (113°F)

PHOTOMETRIC SAMPLES

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	3049
Wattage	30.95W
Efficacy	99
Beam Angle	50°=110° 10°=160°
Spacing	0° = 1.36    90° = 1.26

Photometric values based on tests performed in compliance with LM-63 & LM-79

Indoor Candela Plot

