

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

3' SHOP LIGHT WITH PULL STRING

4000K | 3049 DELIVERED LUMENS

KEY FEATURES

Luminaire features 20-inch built-in pull chain with easy-to-grab ETI finial and has a clear lens with optic design that helps lower glare.

CCT & Light Quality

- CCT 4000K, 80+ CRI

Light Output & Efficacy

- High Lumen Package: 3000 lm
- Efficacy Rating: 94 LPW

SPECIFICATIONS

Construction & Optics

- White metal housing
- Clear lens with optic design to reduce glare

Installation

- Comes with suspension mounting kit and 5 ft. power cord

Electrical

- 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operation Temperature: -20°C (-4°F) / 45°C (113°F)
- Non-Dimmable

Warranty

5-Year Standard Warranty. See terms at: ETISSL.com/warranty/



KEY DATA	
Lumens	3049
Wattage	30.95
Efficacy Range (LPW)	99
Reported Life (Hours)	L70 / 60,000

Certifications & Test Data

- All luminaires are UL listed and are built for damp location use
- Adheres to LM79, and TM30 industry standards for photometric, lumen maintenance and lifetime calculations
- ENERGY STAR® Qualified
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- RoHS Compliant
- IC Rated for direct contact with insulation



3' Shop Light WITH PULL STRING | 4000K | 3049 DELIVERED LUMENS

CATALOG LOGIC




Notes:
1. This product is not configurable. Only designated 'Stock' SKUs are available.

STANDARD STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description	Case QTY	Lumen Package	Delivered Lumens ¹	Wattage (Nominal)	Efficacy	CCT	CRI	Voltage	Dimming	ENERGY STAR®
SHPC-3FT-3000LM-8-40K-SV	55702142	3' Shop Light with Pull String	4	3000	3049	32	99	4000K	80+	120V	Non-Dim	Yes, Search: 557021##

Notes: 1. For more delivered lumens and test data see below, or visit ETISSL.com

DIMENSIONS / DETAILS

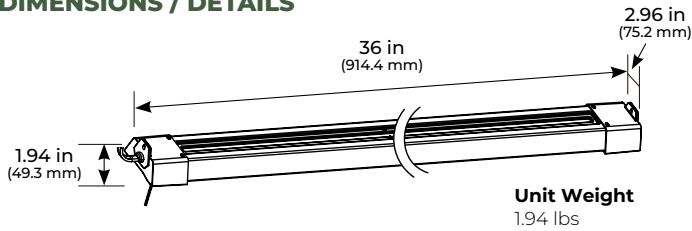


Installation Kit



- Includes:
- 1 - 5 ft. Power Cord (attached to fixture)
 - 2 - Mounting Chains with S Hooks
 - 2 - Drywall Anchors
 - 2 - Hook Screws

MOUNTING



PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	60,000


Load Information

Power Factor	0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-20°C (-4°F) / 45°C (113°F)

PHOTOMETRIC SAMPLES

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	3049
Wattage	30.95W
Efficacy	99
Beam Angle	50%=110° 10%=160°
Spacing	0° = 1.36 90° = 1.26

Indoor Candela Plot



Photometric values based on tests performed in compliance with LM-63 & LM-79



ETI Lighting
720 Northgate Parkway, Wheeling, IL 60090 | TEL: 1.855.384.7754
E-mail: ETIorders@ETISSL.com | ETISSL.com

All specifications are subject to change without notice.
All reported values are nominal or typical, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.