

4' X 15" LOW PROFILE FLUSHMOUNT
3 CCT COLOR PREFERENCE[®] | NIGHTLIGHTR[™]

KEY FEATURES

- Low profile design with decorative beveled trim
- 50,000-hour life with L70 at 50,000
- TRIAC Dimming
- Adjust night light (Amber 2000K) with wall switch or dimmer
- 3 Field adjustable CCT (3000K/4000K/5000K)

SPECIFICATIONS

Construction

- Thin panel with decorative beveled white trim

Optics

- PC diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation

- Surface mount kit included:
 - 6 Mounting Screws
 - 3 Wire Connectors
 - 6 Drywall Anchors
 - 2 Safety Cables
 - 4 Pins
 - Location Paper and Lever

Electrical


- 60,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operating temperature: -4°F ~ 113°F
- Triac dimming, down to 10%*
- ETi SSL's patented 3 CCT COLOR PREFERENCE[®] allowing for easy field-adjustable lighting output with switch located on product back

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty. See terms at: ETiSSL.com/warranty/

Regular Light Mode > Night Light Mode



KEY DATA	
Lumen Range	561 – 2203
Wattage Range	45 – 46
Night Light Wattage	20
Efficacy Range (LPW)	90 – 95
Reported Life (Hours)	L70 / 60,000

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



Certifications & Test Data

- All luminaires are built to UL standards, damp locations rated (See Page 2 for search info.)
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- RoHS Compliant



4' x 15" Low Profile Flush Mount 3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™

CATALOG LOGIC

CLLP-NL

Series

CLLP-NL
Low Profile
Flushmount with
NightlightR™

-

4000LM

Lumens

4000LM

-

8

CRI

8
80CRI
(min.)

-

CP3

CCT

CP3
3 CCT
Color Preference®
3/4/5000K

-

SV

Voltage

SV
Single-Volt
120V

-

TD

Dimming

TD
TRIAC
Dimming

-

W

Trim

W
White


Notes:
1. This product is not configurable, only designated 'Stock' SKUs are available.
2. Factory set at 3000K. Installing contractor responsible for ensuring desired CCT is selected during installation.

STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

Catalog Part Number	Order Number	Product Description	Wattage (Nominal)	Nightlight Wattage	Lumen Package	Delivered Lumens ²	Efficacy (LPW)	CCT	CRI	Volt.	Dim
CLLP-NL-4000LM-8-CP3-SV-TD-W	56702114	4ft x 15in Flush Mount with Night Light Frosted Lens / White Trim	50	20	4000	4147	90	3000K	80+	120V	TRIAC
						4313	95	4000K			
						4299	93	5000K			

Notes: 1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order 2. For more delivered lumens and test data see on page 3, or visit ETiSSL.com

DIMENSIONS / DETAILS




Unit Weight
13 lbs



Factory settings:
3000K

INSTALLATION KIT

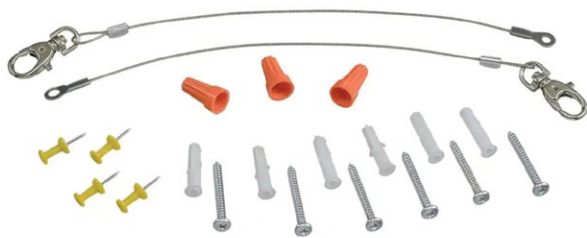

PERFORMANCE / DATA

Lumen Maintenance	
Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	90%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	60,000

Load Information	
Power Factor	.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)

PHOTOMETRIC SAMPLE



Luminaire Data: @4000K	
CCT & CRI	4000K, 80+ CRI
Delivered Lumens	4313
Wattage	45.2W
Efficacy	95
Beam Angle	50%=113° 10%=165°
Spacing	0° = 1.36 90° = 1.26

Photometric values based on tests performed in compliance with LM-63 & LM-79

