

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## MWPK | MODERN WALL PACK

WITH SLIM GLASS REFRACTOR

3 Lumen Boost® | 3 CCT Color Preference®

### KEY FEATURES

ETi SSL's Modern Wall Packs have shallow backboxes and textured tempered glass, providing a soft, diffused light quality. These versatile wall packs have 3 selectable CCTs and Wattages, with hinged housing for easy access to wiring and CCT and Wattage switches.

#### CCT & Light Quality

- 3 Selectable CCTs (3000K, 4000K, 5000K)
- 80+ CRI

#### Light Output & Efficacy

- 3 Lumen Packages and 3 Lumen Boost Levels:
  - Lumen Package 1:** 3600 – 8520 lm
  - Lumen Package 2:** 9600 – 13800 lm
  - Lumen Package 3:** 12000 – 19600 lm
- Efficacy: Up to 145 LPW

#### Dimming, Voltage, Controls

- Integrated 0-10V dimming
- Universal voltage (120–277V), 50/60Hz
- Photocell w/ enable/disable standard

### SPECIFICATIONS

#### Construction

- Corrosion resistant, rugged die-cast aluminum housing with bronze powder coat paint finish
- Hinged housing allows for easy access to wiring, wattage and CCT select

#### Optics

- Type 4 distribution
- 3 Selectable Lumen Packages from 8520 to 19600 Lumens at highest wattage
- Clear tempered textured glass provides diffused, uniform light quality

#### Electrical, Operating Temp.

- Universal 120-277 VAC input voltage.
- Power factor >90%, THD <20%
- Operating Temperature Range: -40° C (-40° F) / 45° C (113° F)

#### Warranty

- Five-year limited warranty

KEY DATA	
Delivered Lumen Range	4461 – 19311
Wattage Range	33.1 – 140.8
Efficacy Range (LPW)	125 – 145
Reported Life (Hours)	L70 / > 60,000



**Hinged Access**  
for wiring,  
Wattage & CCT  
select access



**Photocell**  
w/cover  
+ enable  
disable



**DUSK  
TO  
DAWN**



**Color  
Preference®**


**3 LUMEN  
BOOST®**

#### Certifications & Test Data

- UL/cUL listed and built for wet location
- IP65 Rated
- DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to [www.designlights.org](http://www.designlights.org) for details
- Estimated > 60,000 hours LED lifespan based on IES LM-80 results and TM-21 calculations



## ORDERING GUIDE

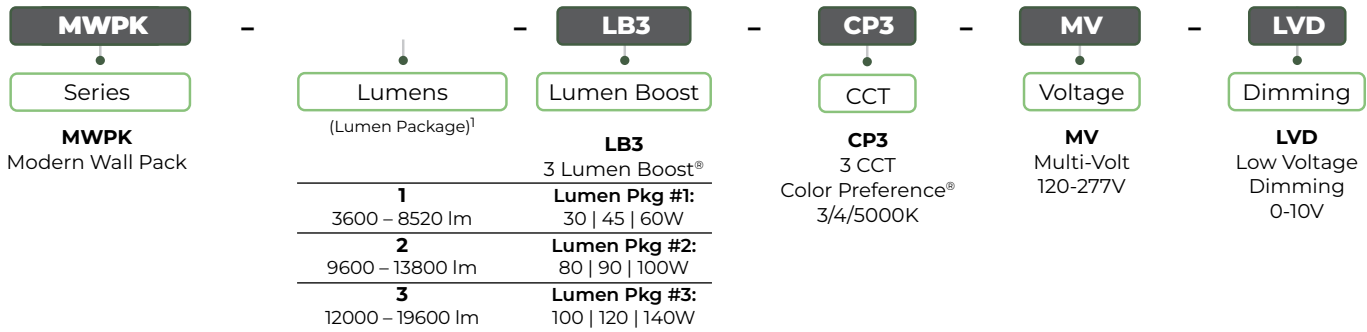


Notes: 1. Lumen package gives nominal range. See below for delivered lumen data.

## STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description	CRI	CCT (CP3)	Wattage Level	Delivered Lumens <sup>1</sup>	LPW	Volt.	Dim	DLC <sup>2</sup>
MWPK-1-LB3-CP3-MV-LVD	61509101	MWPK Slim Glass Refractor Wall Pack, Photocell w/ enable disable, Lumen Pkg 1	80+	3000K	60	7268	129	120-277V	0-10V	Premium
					45	5946	131			
					30	4461	135			
				4000K	60	7626	138			
					45	6169	138			
					30	4571	140			
				5000K	60	7631	133			
					45	6301	137			
					30	4717	141			
MWPK-2-LB3-CP3-MV-LVD	61509201	MWPK Slim Glass Refractor Wall Pack, Photocell w/ enable disable, Lumen Pkg 2	80+	3000K	100	12285	125	120-277V	0-10V	Premium
					90	11494	125			
					80	10323	128			
				4000K	100	12648	132			
					90	12143	150			
					80	10689	135			
				5000K	100	12535	126			
					90	11811	127			
					80	10657	130			
MWPK-3-LB3-CP3-MV-LVD	61510101	MWPK Slim Glass Refractor Wall Pack, Photocell w/ enable disable, Lumen Pkg 3	80+	3000K	140	18826	135	120-277V	0-10V	Premium
					120	16206	135			
					100	13850	137			
				4000K	140	19072	141			
					120	16777	143			
					100	14360	145			
				5000K	140	19311	137			
					120	16712	138			
					100	14503	142			


Notes: 1. For more delivered lumens, download ies files from ETISSL.com  
2. DLC search by catalog part number

**LUMINAIRE DETAILS**

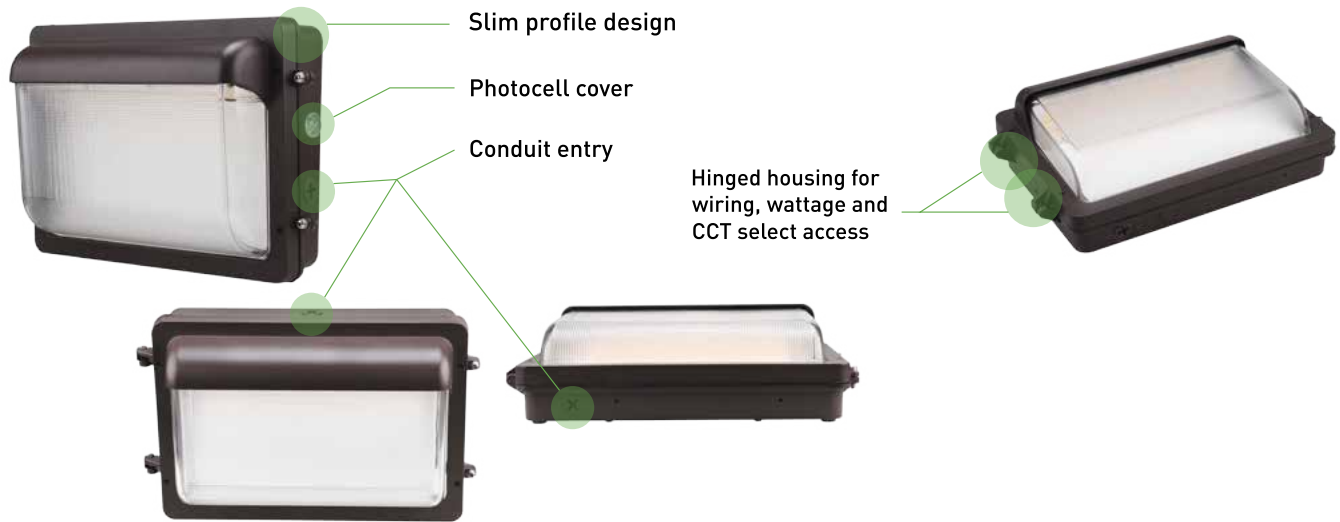


**ACCESSORIES** (Order Separately, Field Install)

Catalog Part Number	Order Number	Description
✓ MWPK-WG-SM	70537101	Wire Guard for MWPK, Size 1 & 2
✓ MWPK-WG-LG	70538101	Wire Guard for MWPK, Size 3
✓ MWPK-SH-SM	70706101	Light Shield for MWPK, Size 1 & 2
✓ MWPK-SH-LG	70707101	Light Shield for MWPK, Size 3



Wire Guard (Size 1 & 2)  
MWPK-WG-SM



Wire Guard (Size 3)  
MWPK-WG-LG



Light Shield (Size 1 & 2)  
MWPK-SH-SM



Light Shield (Size 3)  
MWPK-SH-LG

**PERFORMANCE / Data**


**Lumen Maintenance**

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89.37%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	>60,000

**Load Information**

<b>Power Factor</b>	≥0.9
<b>THD</b>	≤20%
<b>Frequency</b>	50/60 Hz
<b>Operating Humidity</b>	20% - 90% RH
<b>Low Temp Start / Max Temp</b>	-40° C (-40° F) / 45° C (113° F)

**DIMENSIONS / DETAILS**

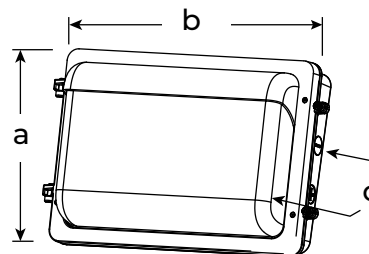

Lumen Pkg.	a	b	c	weight
1	8.8"	13.7"	4.4"	6.8 lbs.
2	8.8"	13.7"	4.4"	7.3 lbs.
3	12.8"	17.8"	4.5"	8.2 lbs.

Factory settings:  
5000K / Highest Wattage