

| | |
|------------|----------|
| DATE: | PROJECT: |
| TYPE: | NOTES: |
| CATALOG #: | |

SWPK | SECURITY WALL PACK
 WITH DUSK-TO-DAWN PHOTOCELL
 3 Lumen Boost® | 3 CCT Color Preference®

KEY FEATURES

With a traditional security wall pack form factor and footprint, this luminaire offers a Dusk-to-Dawn feature and provides flexible choices with 9 CCT/lumen combinations in one!

CCT & Light Quality

- 3 Selectable CCTs (3000K, 4000K, 5000K)
- 70+ CRI

Light Output & Efficacy

- 1 Lumen Package and 3 Lumen Boost Levels:
Lumen Package 1: 1800 – 4050 lm
- Efficacy up to 148 LPW

Dimming, Voltage, Controls

- Integrated 0-10V dimming
- Universal voltage (120-277V)
- Dusk-to-Dawn:
 Photocell w/ enable/disable capability standard

SPECIFICATIONS

Construction

- Durable die-cast aluminum back housing with dark bronze powder coat finish
- Built-in photocell

Optics

- Type 3 distribution
- 1 Lumen Package and 3 Selectable Wattage Levels: 15 | 20 | 30W
- PMMA lens provides diffused, uniform light quality

Electrical, Operating Temp.

- Universal 120-277V, 50/60Hz
- Power factor >90%, THD <20%
- Operating Temperature Range: -40° C (-40° F) / 50° C (122° F)

Warranty

- Five-year limited warranty



DUSK TO DAWN



Color Preference®

3 LUMEN BOOST®

| KEY DATA | |
|-----------------------|----------------|
| Delivered Lumen Range | 2230 – 4163 |
| Wattage Range | 15.3 – 30.6 |
| Efficacy Range (LPW) | 134 – 148 |
| Reported Life (Hours) | L70 / > 54,000 |


Certifications & Test Data

- UL/cUL listed and built for wet location
- IP65 Rated
- DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to www.designlights.org for details
- Estimated 54,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations



SWPK Security Wall Pack WITH DUSK-TO-DAWN PHOTOCELL | 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

ORDERING GUIDE (typical 2-3 day shipment lead time)¹

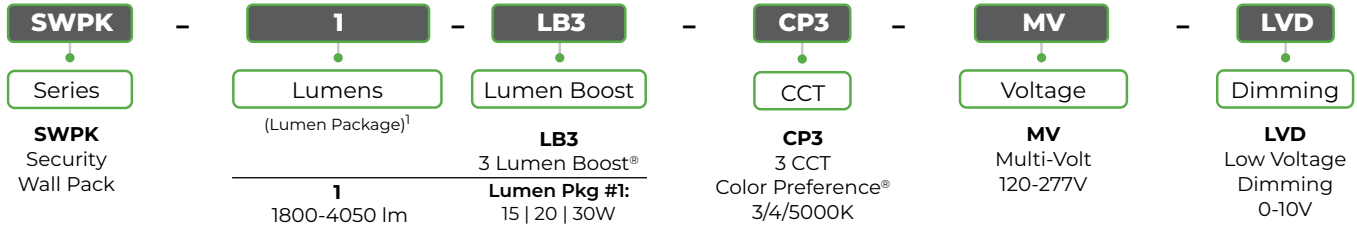

Notes: 1. Lumen package ranges are approximate values. For actual lumen data, please see below.


STOCK ORDERING INFORMATION

| Catalog Part Number | Order Number | Description | CRI | CCT (CP3) | Wattage Level | Delivered Lumens ¹ | LPW | Volt. | Dim | DLC ² |
|-----------------------|--------------|-------------------------------------|-----|-----------|---------------|-------------------------------|-----|----------|-------|------------------|
| SWPK-1-LB4-CP3-MV-LVD | 61506101 | Security Wall Pack, Lumen Package 1 | 80+ | 3000K | 30 | 4101 | 135 | 120-277V | 0-10V | Premium |
| | | | | | 20 | 2861 | 139 | | | |
| | | | | | 15 | 2254 | 146 | | | |
| | | | | 4000K | 30 | 4163 | 141 | | | |
| | | | | | 20 | 2909 | 143 | | | |
| | | | | | 15 | 2255 | 148 | | | |
| | | | | 5000K | 30 | 4089 | 134 | | | |
| | | | | | 20 | 2941 | 142 | | | |
| | | | | | 15 | 2230 | 144 | | | |

Notes: 1. For more delivered lumens, download ies files from ETISSL.com
2. DLC search by catalog part number

IES Pkg 1

DIMENSIONS / DETAILS

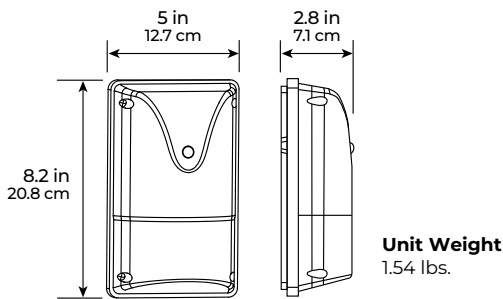

PERFORMANCE / Data

Lumen Maintenance

| Ambient Temp. | TM-21 Lumen Maintenance (54,000 hours) |
|---------------|--|
| 25° C (77° F) | 87.84% |
| Ambient Temp. | TM-21 Theoretical L70 (hours) |
| 25° C (77° F) | > 54,000 |

Load Information

| | |
|----------------------------------|----------------------------------|
| Power Factor | ≥0.9 |
| THD | ≤20% |
| Frequency | 50/60 Hz |
| Operating Humidity | 20% - 90% RH |
| Low Temp Start / Max Temp | -40° C (-40° F) / 50° C (122° F) |

DISTRIBUTION

TYPE IV

