

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## SWPK | SECURITY WALL PACK

WITH DUSK-TO-DAWN PHOTOCELL  
3 Lumen Boost® | 3 CCT Color Preference®

### KEY FEATURES

With a traditional security wall pack form factor and footprint, this luminaire offers a Dusk-to-Dawn feature and provides flexible choices with 9 CCT/lumen combinations in one!

#### CCT & Light Quality

- 3 Selectable CCTs (3000K, 4000K, 5000K)
- 70+ CRI

#### Light Output & Efficacy

- 1 Lumen Package and 3 Lumen Boost Levels:  
**Lumen Package 1:** 1800 – 4050 lm
- Efficacy up to 148 LPW

#### Dimming, Voltage, Controls

- Integrated 0-10V dimming
- Universal voltage (120–277V)
- Dusk-to-Dawn:  
Photocell w/ enable/disable capability standard

### SPECIFICATIONS

#### Construction

- Durable die-cast aluminum back housing with dark bronze powder coat finish
- Built-in photocell

#### Optics

- Type 3 distribution
- 1 Lumen Package and 3 Selectable Wattage Levels: 15 | 20 | 30W
- PMMA lens provides diffused, uniform light quality

#### Electrical, Operating Temp.

- Universal 120-277V, 50/60Hz
- Power factor >90%, THD <20%
- Operating Temperature Range: -40° C (-40° F) / 50° C (122° F)

#### Warranty

- Five-year limited warranty



**DUSK  
TO  
DAWN**



**Color  
Preference®**

**3 LUMEN  
BOOST®**

KEY DATA	
Delivered Lumen Range	2230 – 4163
Wattage Range	15.3 – 30.6
Efficacy Range (LPW)	134 – 148
Reported Life (Hours)	L70 / > 54,000

#### Certifications & Test Data

- UL/cUL listed and built for wet location
- IP65 Rated
- DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to [www.designlights.org](http://www.designlights.org) for details
- Estimated 54,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations



# SWPK Security Wall Pack WITH DUSK-TO-DAWN PHOTOCELL | 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

## ORDERING GUIDE

<b>SWPK</b>	-	<b>1</b>	-	<b>LB3</b>	-	<b>CP3</b>	-	<b>MV</b>	-	<b>LVD</b>
Series		Lumens (Lumen Package) <sup>1</sup>		Lumen Boost		CCT		Voltage		Dimming
<b>SWPK</b> Security Wall Pack		<b>1</b> 1800-4050 lm		<b>LB3</b> 3 Lumen Boost® <b>Lumen Pkg #1:</b> 15   20   30W		<b>CP3</b> 3 CCT Color Preference® 3/4/5000K		<b>MV</b> Multi-Volt 120-277V		<b>LVD</b> Low Voltage Dimming 0-10V


Notes: 1. Lumen package ranges are approximate values. For actual lumen data, please see below.

## STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description	CRI	CCT (CP3)	Wattage Level	Delivered Lumens <sup>1</sup>	LPW	Volt.	Dim	DLC <sup>2</sup>
SWPK-1-LB3-CP3-MV-LVD	61506101	Security Wall Pack, Lumen Package 1	80+	3000K	30	4101	135	120-277V	0-10V	Premium
					20	2861	139			
					15	2254	146			
				4000K	30	4163	141			
					20	2909	143			
					15	2255	148			
				5000K	30	4089	134			
					20	2941	142			
					15	2230	144			

Notes: 1. For more delivered lumens, download ies files from ETISSL.com  
2. DLC search by catalog part number

## DIMENSIONS / DETAILS

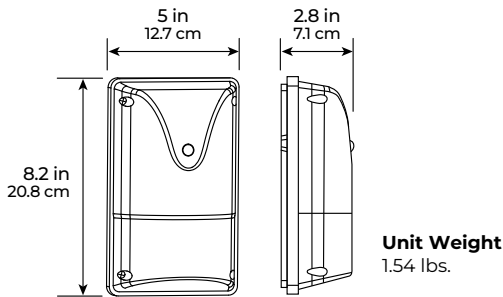

## PERFORMANCE / Data

### Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	87.84%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 54,000

### Load Information

<b>Power Factor</b>	≥0.9
<b>THD</b>	≤20%
<b>Frequency</b>	50/60 Hz
<b>Operating Humidity</b>	20% - 90% RH
<b>Low Temp Start / Max Temp</b>	-40° C (-40° F) / 50° C (122° F)

## DISTRIBUTION

TYPE IV

