



PRODUCT OVERVIEW

ETi SSL's Slim Canopy luminaire has a **small footprint** and offers sufficient light coverage, helping provide a safe, well-lit environment. The **3 selectable wattages and CCTs**, IP65, wet location rating, and bronze or white finishes make this canopy a practical and versatile outdoor lighting solution.

Equipped with 0-10V dimming, universal 120-277 voltage, this canopy is ideal for parking garages, drive throughs, walk ways and more.



INNOVATE. ILLUMINATE. INSPIRE.

SLIM CANOPY 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

Scan code for more information



PERFORMANCE SUMMARY

Lumen Packages	Lumen Pkg. Range (LB3)	Selectable Watt. Levels	CCT (CP3)	Distribution
Lumen Pkg 1	3800 – 7600	25 40 60	3000K 4000K 5000K	

Slim, 4.17" Profile



ELECTRICAL DATA

Operation: 120-277V, 50/60Hz

Low Temp Start / Max Temp: -30° C (-22° F) / 45° C (113° F)


Controls: 0-10V

CERTIFICATIONS & OTHER INFO


Warranty: 5 year

IK10 Impact Resistant


UL/cUL Listed: Wet, IP65 Rated



Easy Access for Wattage Selection



Easy Access for CCT Selection

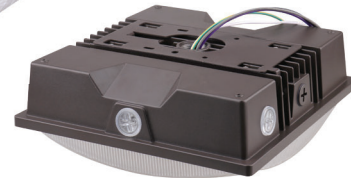

MTO OPTIONS

Slim Canopies are also available with installed Occupancy Sensors.