




**PRODUCT OVERVIEW**


ETI's VersaFloods include **3 Selectable Wattages X 3 Selectable CCTs X 2 Mounting Options**—It's like getting **18 lights in one!** Both the small and large VersaFlood series comes in various lumen package sizes. Equipped with 0-10V dimming, universal 120-277 voltage and 347-480V options, they are ideal for site lighting, building facades, small stadium lighting, accent lighting, flag poles, column and sign lighting, security and more.



INNOVATE. ILLUMINATE. INSPIRE.

## VERSAFLOOD SMALL

PERFORMANCE SUMMARY				
Lumen Packages	Lumen Pkg. Range (LB3)	Select. Watt. Levels	CCT (CP3)	Distribution
Lumen Pkg 1	2000	15	3000K 4000K 5000K	
Lumen Pkg 2	1900 – 4900	15   25   35	3000K 4000K 5000K	
Lumen Pkg 3	4500 – 8400	35   45   60	3000K 4000K 5000K	
Lumen Pkg 4	5900 – 11200	45   60   80	3000K 4000K 5000K	
Lumen Pkg 5	10500 – 16800	80   100   120	3000K 4000K 5000K	
Lumen Pkg 6	13000 – 21750	100   120   150	3000K 4000K 5000K	

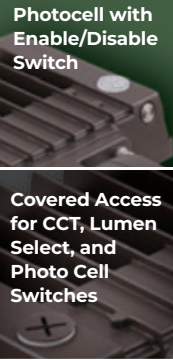

\*White available for Lumen Packages 1, 2 & 3 only

### ELECTRICAL DATA

Operation: 120-277V 50/60Hz  
 Low Temp Start / Max Temp: -30° C (-22 F) / 50° C= (122° F)  
 Controls: 0-10V, Photocell Dusk-to-Dawn  
 Surge Protection: 15-60W: 2.5kV, 80-150W: LIN-PE: 6.0kV, L-N: 4.0kV

### CERTIFICATIONS & OTHER INFO

Warranty: 5 year  
 Vibration Tested: 1.5G (Knuckle / Slipfitter), 3G (Trunnion)  
 UL/cUL Listed: Wet location, IP65 Rated


### TWO MOUNTING OPTIONS INCLUDED




### ACCESSORIES

- Wall Mount Kit
- Junction Box Cover Kit
- Ground Spike Stake

## VERSAFLOOD LARGE

PERFORMANCE SUMMARY				
Lumen Packages	Lumen Pkg. Range (LB3)	Selectable Watt. Levels	CCT (CP3)	Distribution
Lumen Pkg 1	16000 – 32000	100   150   205	3000K 4000K 5000K	
Lumen Pkg 2	24000 – 39000	150   200   255	3000K 4000K 5000K	
Lumen Pkg 3	39000 – 50000	250   290   330	3000K 4000K 5000K	

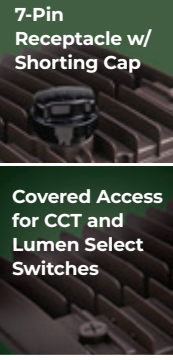

### ELECTRICAL DATA

Operation: 120-277V 50/60Hz, 347V 60Hz, 480V 60Hz  
 Low Temp Start / Max Temp: -40° C (-40 F) / 50° C= (122° F)  
 Controls: 0-10V, 7-Pin Receptacle w/ Shorting Cap  
 Surge Protection: L/LIN-PE: 10kV, L-N:6kV

### CERTIFICATIONS & OTHER INFO

Warranty: 5 year  
 Vibration Tested: 1.5G (Knuckle / Slipfitter), 3G (Trunnion)  
 UL/cUL Listed: Wet location, IP65 Rated  
 EPA: 1.4 ft² (1m pkg 1-2), 1.7 ft² (1m pkg 3)

### TWO MOUNTING OPTIONS INCLUDED



### ACCESSORIES

- 7-Pin Receptacle Photocells
- Wire Guards

### MADE TO ORDER

- High Volt 347-480 options
- Surge Protection 10KVA (120-277V only)

Notes: 1. 347-480V Made to Order only. Lead times apply.

