



PRODUCT OVERVIEW


ETi SSL's VersaPak adjustable wall packs offer a modern full cut-off design with 3 Selectable Wattages and 3 Selectable CCTs. With a tilting head that's **adjustable between 0-90 degrees**, VersaPak puts light where it's needed most.

Equipped with 0-10V dimming, universal 120-277 voltage, and a Dusk-to-Dawn Photocell, they are ideal for building entrances, loading docks, walkways and storage facilities.



INNOVATE. ILLUMINATE. INSPIRE.

PERFORMANCE SUMMARY

Lumen Packages	Lumen Pkg. Range (LB3)	Select. Watt. Levels	CCT (CP3)	Distribution Plot
Lumen Pkg 1	1900 – 4050	15 20 30	3000K 4000K 5000K	<p>TYPE II</p> 
Lumen Pkg 2	3900 – 6750	30 40 50	3000K 4000K 5000K	
Lumen Pkg 3	6600 – 10800	50 65 80	3000K 4000K 5000K	

Photocell with cover and enable / disable

Hinged Access for wiring, Wattage & CCT select access



ELECTRICAL DATA

Operation: 120-277V 50/60Hz

Low Temp Start / Max Temp: -40° C (-40 F) / 50° C= (122° F)

Controls: 0-10V, Photocell Dusk-to-Dawn

Surge Protection: Pkg 1: 2.5kV, Pkg 2: 4kV, Pkg 3: LIN-PE: 2kV, L-N: 6kV

CERTIFICATIONS & OTHER INFO


Warranty: 5 year

UL/cUL Listed: Wet location, IP65 Rated



Dark Sky Compatible*

VersaPak can be utilized in dark sky compliant plans when kept at 0° and set to 3000K.

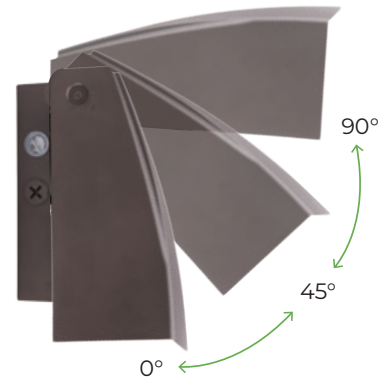

Adjustable Head for Fine-Tuned Distribution

VersaPak has an adjustable head that can pivot from 0° to 90°