

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

**SCNP | SLIM CANOPY**  
3 Lumen Boost® | 3 CCT Color Preference®

**KEY FEATURES**

ETi SSL's Slim Canopy luminaire has a small footprint and offers sufficient light coverage, helping provide a safe, well-lit environment. The 3 selectable wattages and CCTs, IP65, wet location rating, and bronze or white finishes make this canopy a practical and versatile outdoor lighting solution for various applications.

**CCT & Light Quality**

- 3 Selectable CCTs (3000K, 4000K, 5000K)
- 80+ CRI

**Light Output & Efficacy**

- Lumen Boost Levels: 25/40/60W
- Lumen Package:** 3800 – 7600 lm
- Efficacy: Up to 156 LPW

**Dimming, Voltage, Controls**

- Integrated 0-10V dimming
- Universal voltage (120–277V)
- Photocell w/ enable/disable standard

**SPECIFICATIONS**

**Construction**

- Corrosion and impact resistant, rugged die-cast aluminum housing with bronze or white powder coat paint finish
- Removable plugs for easy access to wattage and CCT select switches

**Optics**

- 3 Selectable Lumens, range from 3860.2 to 7652 Lumens at highest wattage
- Diffused polycarbonate lens for uniform light quality

**Electrical, Operating Temp.**

- Universal 120-277V, 50/60Hz
- Both drivers have a power factor >90%, THD <20%
- Operating Temperature Range: -30° C (-22° F) / 45° C (113° F)

**Warranty**

- Five-year limited warranty



**Easy Access**  
to Wattage & CCT select switches



KEY DATA	
Delivered Lumen Range	3860 – 7653
Wattage Range	19.4 – 104.3
Efficacy Range (LPW)	125 – 156
Reported Life (Hours)	L70 / > 60,000

**Certifications & Test Data**

- UL/cUL listed and built for wet location
- IP65 Rated
- DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to [www.designlights.org](http://www.designlights.org) for details
- Estimated > 60,000 hours LED lifespan based on IES LM-80 results and TM-21 calculations
- Impact resistant—IK10 Rated



# Slim Canopy 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

## ORDERING GUIDE

<b>SCNP</b>	-	<b>1</b>	-	<b>LB3</b>	-	<b>CP3</b>	-	<b>MV</b>	-	<b>LVD</b>	-	<b>OPTIONS</b>	
Series		Lumens		Lumen Boost		CCT		Voltage		Dimming		Finish Color	Sensor
<b>SCNP</b> Slim Canopy		(Lumen Package) <sup>1</sup>		<b>LB3</b> 3 Lumen Boost®		<b>CP3</b> 3 CCT Color Preference®		<b>MV</b> Multi-Volt 120-277V		<b>LVD</b> Low Voltage Dimming 0-10V		<b>(Leave Blank)</b> Bronze <b>WH</b> White	<b>(Leave Blank)</b> No Sensor <b>OCC</b> <sup>2</sup> Microwave Occupancy Sensor
		<b>1</b> 3800 — 7600 lm		<b>Lumen Pkg #1:</b> 25   40   60W		<b>3/4/5000K</b>							

Notes: 1. Lumen package ranges are approximate values. For actual lumen data, please see below.  
2. Sensor is MTO only. Longer lead times apply.

## STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description	CRI	CCT (CP3)	Wattage Level	Delivered Lumens <sup>1</sup>	LPW	Volt.	Dim	DLC <sup>2</sup>
SCNP-1-LB3-CP3-MV-LVD	60603101	Slim Canopy Bronze Finish	80+	3000K	60	7000	125	120-277V	0-10V	Premium
					40	5616	133			
					25	3860	142			
SCNP-1-LB3-CP3-MV-LVD-WH	60603102	Slim Canopy White Finish	80+	4000K	60	7653	143	120-277V	0-10V	Premium
					40	6096	150			
					25	4111	156			
				5000K	60	7353	132			
					40	5980	142			
					25	4150	153			

Notes: 1. For more delivered lumens and test data visit ETISSL.com 2. DLC search by catalog part number


## MADE-TO-ORDER PRODUCT INFO (Longer lead times apply. Contact ETi for details.)

Catalog Part Number	Model Number	Description
SCNP-1-LB3-CP3-MV-LVD-OCC	60603101-I	Slim Canopy Bronze Finish with Microwave Occupancy Sensor
SCNP-1-LB3-CP3-MV-LVD-WH-OCC	60603102-I	Slim Canopy White Finish with Microwave Occupancy Sensor

## LUMINAIRE DETAILS



**DIMENSIONS**

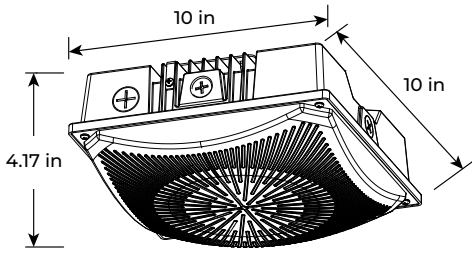

**Unit Weight**  
6.1 lbs.

**PERFORMANCE / Data**

**Lumen Maintenance**

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89.37%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 60,000

**Load Information**

<b>Power Factor</b>	≥0.9
<b>THD</b>	≤20%
<b>Frequency</b>	50/60 Hz
<b>Operating Humidity</b>	20% - 90% RH
<b>Low Temp Start / Max Temp</b>	-30° C (-22° F) / 45° C (113° F)

**PHOTOMETRIC SAMPLES**



**Luminaire Data:** at 4000K, wattage level: 60

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	<b>7652.7</b>
Wattage	<b>53.40W</b>
Efficacy	<b>143</b>
Max CD	<b>2,321.9</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

**Luminaire Data:** at 4000K, wattage level: 40

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	<b>6095.8</b>
Wattage	<b>40.67W</b>
Efficacy	<b>150</b>
Max CD	<b>1,850.6</b>

**Luminaire Data:** at 4000K, wattage level: 25

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	<b>4110.9</b>
Wattage	<b>26.43W</b>
Efficacy	<b>156</b>
Max CD	<b>1,248.6</b>

**Candela Plot**

