

TWPK | TRADITIONAL WALL PACK

WITH DUSK-TO-DAWN PHOTOCELL

4 Lumen Boost® | 3 CCT Color Preference®

KEY FEATURES

ETI SSL's bronze outdoor integrated LED wall pack with glass lens is ideal for building-mounted doorway, pathway illumination, building sides and more. This traditional pack provides simple flexibility, equipped with 4 selectable wattages and 3 selectable CCTs.

CCT & Light Quality

- 3 Selectable CCTs (3000K, 4000K, 5000K)
- 80+ CRI

Light Output & Efficacy

- 2 Lumen Packages and 4 Lumen Boost Levels:
Lumen Package 1: 4000 – 8500 lm (30 | 40 | 50 | 60W)
Lumen Package 2: 9500 – 14500 lm (70 | 80 | 90 | 100W)
- Efficacy: Up to 154 LPW

Dimming, Voltage, Controls

- 0-10V dimming
- Universal voltage (120–277V), 50/60Hz

SPECIFICATIONS

Construction

- Corrosion resistant, rugged die-cast aluminum housing with bronze powder coat paint finish
- Hinged housing allows for easy access to wiring, photocell, wattage and CCT select
- Clear tempered textured glass provides diffused, uniform light quality

Optics

- Type 4 distribution
- 2 Selectable Lumen Packages from 8500 to 14500 Lumens at highest wattage

Electrical, Operating Temp.

- Universal 120-277 VAC input voltage, 50/60Hz
- Power factor >90%, THD <20%
- Operating Temperature Range: -40° C (-40° F) / 50° C (122° F)
 Sensor Temperature Range: -25° C TO 50° C (-13° F) / 50° C (122° F)

Warranty

- Five-year limited warranty

KEY DATA	
Delivered Lumen Range	4794 – 14036
Wattage Range	31.5 – 96.3
Efficacy Range (LPW)	141 – 154
Reported Life (Hours)	L70 / > 54,000

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



Hinged Access
for wiring, Wattage
& CCT select access

Photocell
w/cover + enable
disable capability



**DUSK
TO
DAWN**



**Color
Preference®**

**4 LUMEN
BOOST®**

Certifications & Test Data

- UL/cUL listed and built for wet location
- IP65 Rated
- DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to www.designlights.org for details
- Estimated > 50,000 hours LED lifespan based on IES LM-80 results and TM-21 calculations



ORDERING GUIDE

TWPK

Series

TWPK
Traditional
Wall Pack

-

Lumens

(Lumen Package)¹

1

4000 – 8500 lm

2

9500 – 14500 lm

-

LB4

Lumen Boost

LB4
4 Lumen Boost®

Lumen Pkg #1:

30 | 40 | 50 | 60W

Lumen Pkg #2:

70 | 80 | 90 | 100W

-

CP3

CCT

CP3
3 CCT
Color Preference®
3/4/5000K

-

MV

Voltage

MV
Multi-Volt
120-277V

-

LVD

Dimming

LVD
Low Voltage
Dimming
0-10V


Notes:
1. Lumen package ranges are approximate values. For actual delivered lumen data, please see below.

STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description	CRI	CCT (CP3)	Wattage Level	Delivered Lumens ¹	LPW	Volt.	Dim	DLC ²
TWPK-1-LB4-CP3-MV-LVD	61505101	Traditional Wall Pack, Lumen Package 1	80+	3000K	60	8228	141	120-277V	0-10V	Premium
					50	7350	143			
					30	6082	147			
					20	4794	150			
				4000K	60	8500	149			
					50	7560	152			
					30	6231	153			
					20	4845	154			
				5000K	60	8285	140			
					50	7424	143			
					30	6168	147			
					20	4822	149			
TWPK-2-LB4-CP3-MV-LVD	61505201	Traditional Wall Pack, Lumen Package 2	80+	3000K	100	13634	143	120-277V	0-10V	Premium
					90	13121	144			
					80	12036	146			
					70	10514	147			
				4000K	100	14036	150			
					90	13488	151			
					80	12311	152			
					70	10733	153			
				5000K	100	13434	139			
					90	12994	141			
					80	11929	143			
					70	10610	147			

Notes: 1. For more delivered lumens, download ies files from ETISSL.com
2. DLC search by catalog part number

DIMENSIONS / DETAILS

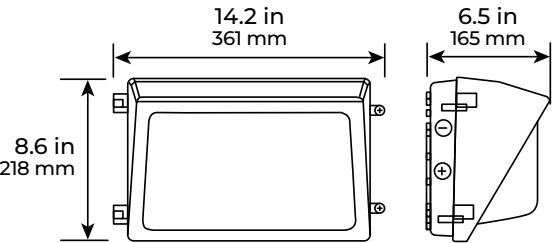

Factory settings:
5000K / Highest Wattage

PERFORMANCE / Data

Lumen Maintenance	
Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	TWPK-1: 87.80% TWPK-2: 94.16%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 54,000

Load Information	
Power Factor	≥0.9
THD	≤20%
Frequency	50/60 Hz
Operating Humidity	20% - 90% RH
Low Temp Start / Max Temp	-40° C (-40° F) / 50° C (122° F)

DISTRIBUTION

TYPE IV

