

**SP | 7" HIGH OUTPUT ADJUSTABLE TRI-PANEL SPINLIGHT<sup>®</sup>**  
4000K | 120V

**KEY FEATURES**

High Output Adjustable Tri-Panel SpinLight<sup>®</sup> is a new addition to the SpinLight Family. It has been designed to retrofit existing E26 medium base socket lamp holders without any wiring.

- This patented SpinLight<sup>®</sup> converts a bare lamp holder into a high-performing, energy-efficient, LED flush mount ceiling light
- Compact design that twists into most E26 medium based socket/ lamp holder (hardwire option with E26 adapter included)
- 3 independent panels to direct light where desired
- Over 50% energy savings compared to CFL lamps

**SPECIFICATIONS**

**Construction**

- Aluminum Housing with black and silver finish

**Light Quality**

- 4000K
- 80+ CRI

**Optics**

- 3 adjustable light panels delivering over 1160 lumens each
- Clear Polycarbonate lens
- High output, uniform light performance

**Installation**

- Twists into most E26 medium based socket/lamp holder (integrated E26 base)
- Also includes a SPEEDMOUNT<sup>®</sup> bracket for remodel and new construction installations—converts a junction box into a lamp holder

**Electrical**

- >54,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operating temperature: -20°C (-4°F) / 45°C (113°F)
- Non-Dimmable

**Warranty**

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://ETISSL.com/warranty/)

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



**3 independent panels**  
adjust to direct light  
where desired



**SpinLight<sup>®</sup>**  
E26 Base on  
back of Fixture



**SPEEDMOUNT<sup>®</sup>**  
Bracket included

**spinLight<sup>®</sup>**



KEY DATA	
Lumen	3670
Wattage	29.5
Efficacy (LPW)	125
Reported Life (Hours)	L70 / > 54,000

**Certifications & Test Data**

- UL Listed
- Damp location rated
- ENERGY STAR<sup>®</sup> rated (See Page 2 for search info.)
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



7" High Output Adjustable Tri-Panel SpinLight®

CATALOG LOGIC

SL

Series

SL

Spin Light

-

7IN

Size

7IN (7" Dia)

-

3500

Lumens

(Lumen Package)

3500

-

8

CRI

8

80CRI (min.)

-

40K

CCT

40K

4000K

-

SV

Voltage

SV

Single-Volt 120V

-

N

Dimming

N


Non-Dimmable

STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Size (Dia)	Case QTY	Lumen Package	Delivered Lumens <sup>2</sup>	Wattage (Nominal)	Efficacy	CCT	CRI	Voltage	Dim	ENERGY STAR®
SL-7IN-3500LM-8-40K-SV-N	566011420	7"	2	3500	3670	30	125	4000K	80+	120V	Non-Dim	Search 566011###

Notes: 1. For more delivered lumens and test data see below, or visit ETISSL.com

DIMENSIONS / DETAILS

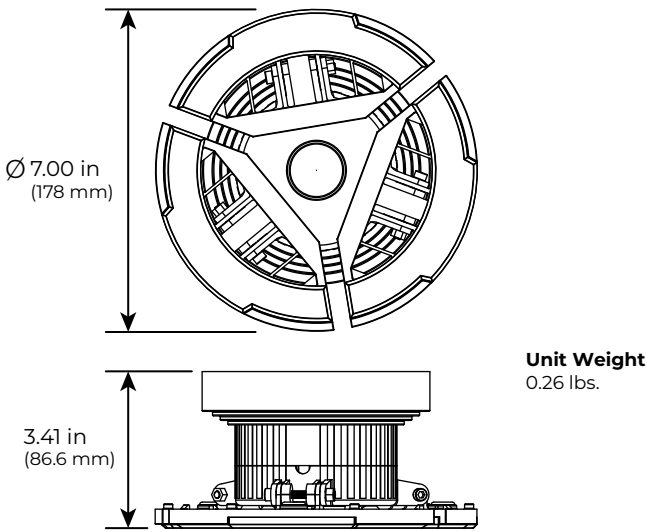

MOUNTING (Included)



QUICK AND EASY INSTALLATION



Easily twists into existing lamp holder, just like a light bulb

- Included:
- SpeedMount™ Socket
  - Mounting Plate Screws
  - Wire Connectors




PHOTOMETRIC SAMPLE

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	3670
Wattage	29.5W
Efficacy	125
Spacing	0° = 1.28 90° = 1.28

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot (down position)



PERFORMANCE / DATA

Lumen Maintenance	
Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	83.62%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 54,000
Load Information	
Power Factor	.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)