

## UTTL | 4" UTILITY LIGHT, 6-PACK

882 LM | EFFICACY: 103 LPW

### KEY FEATURES

ETI SSL's 4IN Utility Lights are small, compact, and powerful. These impact-resistant utility fixtures have keyholes for easy mounting. With a low profile design and 850+ lumens, they are perfect for illuminating areas with challenging mounting spaces.

- Great for tight spaces—4.25" dia. and 0.55" profile height
- Light weight, only 0.22 lb.
- High Efficacy Rating—103 LPW
- Convenient 6-Pack, Keyholes, and Efficient install time

### SPECIFICATIONS

#### Construction

- Light-weight aluminum with white finish

#### Light Quality

- 4000K, 80+ CRI

#### Optics

- Impact-resistant frosted PC diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

#### Installation and Function

- Hard Wire:  
Mounting hardware and quick connectors included

#### Electrical

- >150,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operating temperature: -20°C (-4°F) / 40°C (104°F)
- Non-Dimmable

#### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://ETISSL.com/warranty/)

DATE:

PROJECT:

TYPE:

NOTES:

CATALOG #:



#### SUPER-BRIGHT & COMPACT

Profile height of 0.55" with  
882 delivered lumen output



KEY DATA	
Lumen	882
Wattage	8.6
Efficacy (LPW)	103
Reported Life (Hours)	L70 / > 150,000

#### Certifications & Test Data

- All luminaires are built to ETL standards
- UL Damp location rated
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



4" Utility Light, 6-Pack

CATALOG LOGIC

UTTL

Series

UTTL

4" Utility Light

-

4IN

Size

4IN (4" Dia)

-

850LM

Lumens

(Lumen Package)

850LM

-

8

CRI

8

80CRI (min.)

-

40K

CCT

40K

4000K

-

SV

Voltage

SV

Single-Volt 120V

-

N

Dimming

N

Non-Dimmable

-

WT

Finish

WT

White

-

6PK

Pack Size


6PK

STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Size (Dia)	Case QTY	Lumen Package	Delivered Lumens <sup>1</sup>	Wattage (Nominal)	Efficacy	CCT	CRI	Volt.	Dim
UTTL-4IN-850LM-8-40K-SV-N-WT-6PK	C01003601A	4"	24	850	882	8.5	103	4000K	80+	120V	Non-Dim

Note: 1. For more delivered lumens and test data see below, or visit ETiSSL.com

DIMENSIONS / DETAILS

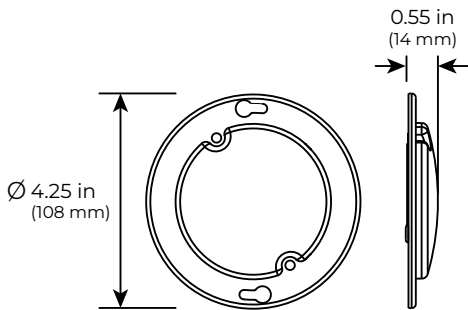

Unit Weight  
0.22 lb.

Included Hard-Wire Mounting Kit:




PHOTOMETRIC SAMPLE

Luminaire Data:

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	882
Wattage	8.6 W
Efficacy	103
Beam Angle	50%=110° 10%=166°
Spacing	0° = 1.23 90° = 1.23

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot



PERFORMANCE / DATA

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	88.41%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 150,000

Load Information

Power Factor	.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-20° C (-4° F) / 40° C (104° F)