



PRODUCT OVERVIEW

ETI Lighting's Altair Canless Downlights and Gimbal Canless Downlights offer **quality and flexibility in residential and commercial applications**—with single and multi-volt options available. High-output options are also available for 6-inch luminaires. Gimbal versions also available. The ALCD/ALCG family was designed for retrofit, remodel, or new construction applications.

Luminaires install quickly and directly into a drywall or drop ceiling without the need and expense of a separate recessed downlight housing or secondary junction box.

These low-profile downlights with **5 Color Preference®** have a sleek, modern look with a 90+ CRI and wet-location rating. They are ideal for new or retrofit construction projects for multifamily, homes, hospitality, offices, and more.



INNOVATE. ILLUMINATE. INSPIRE.

PERFORMANCE SUMMARY

Product	Size (dia.)	Lumen Pkg.	Wattage	CCT (CP5)	Dist. Plot
ALCD	4"	800	10	2700K 3000K 3500K 4000K 5000K	
ALCD	6"	800	10		
ALCD	6" High Output	1200	14		
ALCD	8"	1600	19		
ALCG	4"	650	8		
ALCG	6"	950	12		

Included J-Box with 16" cable





Residential 120V, TRIAC and Commercial 120-277V, 0-10V options

ELECTRICAL DATA

Operation: 120V, 60Hz and 120-277V, 50/60Hz options
 Operating Temperature: -20°C (-4°F) / 40°C (104°F)
 Controls: TRIAC dimming, down to 10% (120V), 0-10V Dimming (120-277V)
 L70 > 110,000 hours

CERTIFICATIONS & OTHER INFO

ETL Listed (US,C), Wet Location, Air Tight Certified
 ALCD items are ETL Listed (US/C) / ALCG are UL Listed (US/C)
 ENERGY STAR® rated & JA8 Title 24 Compliant
 IC Rated for direct contact with insulation
 Warranty: 5 year
 90+ CRI

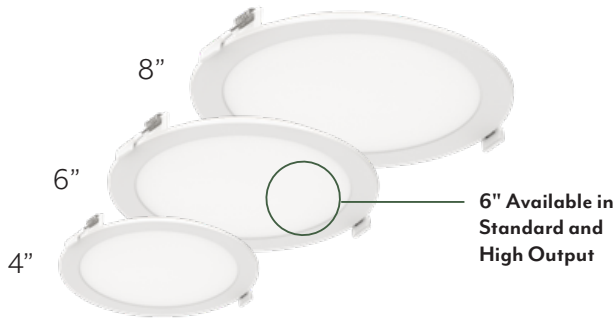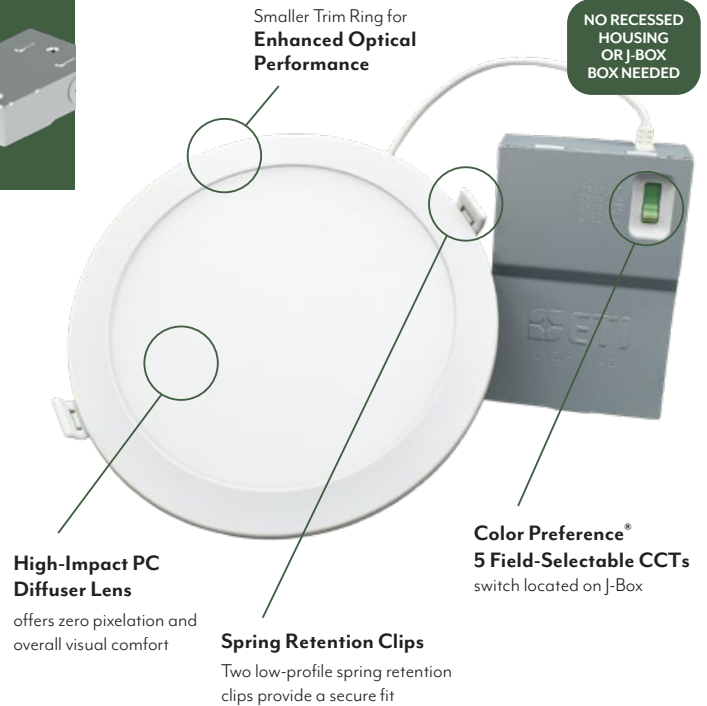

ACCESSORIES



(order separately)



VOLTAGE / DIMMING OPTIONS

Single-Volt (120V) with TRIAC Dimming

Multi-Volt (120-277V) with 0-10V Dimming