



PRODUCT OVERVIEW

ETI Lighting's Altair Canless Downlights and Gimbal Canless Downlights offer **quality and flexibility in residential and commercial applications**—with single and multi-volt options available. High-output options are also available for 6-inch luminaires. Gimbal versions also available. The ALCD/ALCG family was designed for retrofit, remodel, or new construction applications.

Luminaires install quickly and directly into a drywall or drop ceiling without the need and expense of a separate recessed downlight housing or secondary junction box.

These low-profile downlights with **5 Color Preference®** have a sleek, modern look with a 90+ CRI and wet-location rating. They are ideal for new or retrofit construction projects for multifamily, homes, hospitality, offices, and more.



INNOVATE. ILLUMINATE. INSPIRE.

Scan code for more information



PERFORMANCE SUMMARY

| Product | Size (dia.) | Lumen Pkg. | Wattage | CCT (CP5) | Dist. Plot |
|---------|----------------|------------|---------|---|------------|
| ALCD | 4" | 800 | 10 | 2700K 3000K 3500K 4000K 5000K | |
| ALCD | 6" | 800 | 10 | | |
| ALCD | 6" High Output | 1200 | 14 | | |
| ALCD | 8" | 1600 | 19 | | |
| ALCG | 4" | 650 | 8 | | |
| ALCG | 6" | 950 | 12 | | |

Included J-Box with 16" cable




Residential 120V, TRIAC and Commercial 120-277V, 0-10V options

ELECTRICAL DATA

Operation: 120V, 60Hz and 120-277V, 50/60Hz options
 Operating Temperature: -20°C (-4°F) / 40°C (104°F)
 Controls: TRIAC dimming, down to 10% (120V), 0-10V Dimming (120-277V)
 L70 > 110,000 hours

CERTIFICATIONS & OTHER INFO

ETL Listed (US,C), Wet Location, Air Tight Certified
 ALCD items are ETL Listed (US/C) / ALCG are UL Listed (US/C)
 ENERGY STAR® rated & JA8 Title 24 Compliant
 IC Rated for direct contact with insulation
 Warranty: 5 year
 90+ CRI

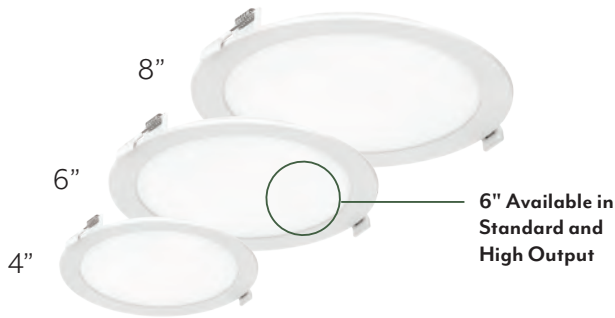

ACCESSORIES



Black and Satin Nickel Trims (available for all sizes)



New Construction Frame with Bar Hangers (available for 4", 6" and 8")



Rough-in Guide Plates for New Construction (available for all sizes)



12 ft. and 20 ft. Extension Cables



25W Battery Backup

(order separately)

VOLTAGE / DIMMING OPTIONS

Single-Volt (120V) with TRIAC Dimming

Multi-Volt (120-277V) with 0-10V Dimming