

## PRODUCT OVERVIEW

ETI Lighting's Altair Retrofit Downlights and Retrofit Gimbal Downlights are efficient and versatile—great for retrofit, remodel, or new construction projects. Each downlight comes with a detachable E26 base and can be used in standard sockets or hard-wired. With a wet location rating, they can be used in indoor environments, such as above showers. The ARDL series has baffle trim, and the ARDG series offers gimbal ring with 350° rotation and 30° tilt for directing light.

These downlights have field-selectable CCTs—**5 Color Preference®** for flexibility, and high 90+ CRI. They also have a long projected life of > 65,000 hours. With diffused lenses, and minimized glare, they are ideal for multifamily, homes, hospitality, small or home offices, and other residential applications.



INNOVATE. ILLUMINATE. INSPIRE.

PERFORMANCE SUMMARY					
Product	Size (dia.)	Lumen Pkg.	Wattage	CCT (CP5)	Dist. Plot
ARDL-4	4"	700	8	2700K 3000K 3500K 4000K 5000K	
ARDL-6	5/6"	900	10.5		
ARDG-4	4"	700	8		
ARDG-6	5/6"	900	10		

**ELECTRICAL DATA**

Operation: 120V, 60Hz  
 Operating Temperature: -20°C (-4°F) / 40°C (104°F)  
 Controls: TRIAC dimming, down to 10%  
 L70 > 65,000 hours


**CERTIFICATIONS & OTHER INFO**

Warranty: 5 year  
 UL Listed (US/C), Wet Location  
 ENERGY STAR® rated, 90+ CRI & JA8 Title 24 Compliant  
 IC Rated for direct contact with insulation

Detachable E26 Base can be used with sockets or removed to hard wire.



Residential 120V, TRIAC

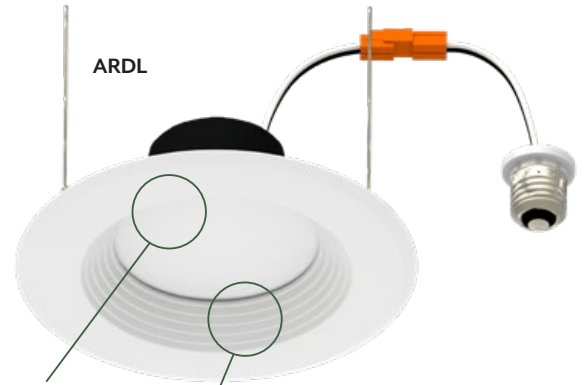

**High-Impact PC Diffuser Lens**  
 offers zero pixelation and overall visual comfort

**Baffle Design**  
 maximizes glare reduction

ARDL



ARDG



ARDG



**Color Preference®**  
 5 Field-Selectable CCTs  
 switch located on back of fixture



**Retention Clips**  
 Torsion springs / Friction clips  
 provide a seamless fit

**FLEXIBLE ILLUMINATION**  
 350° ROTATION | 30° TILT

Direct light where it's needed most with Gimbal option.

