

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## SL | 7" SPIN LIGHT FLUSH MOUNT

### 3 CCT COLOR PREFERENCE®

#### KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 3 Selectable CCTs (3000K, 4000K, 5000K)
- This patented SpinLight® converts a bare lamp holder into a high-performing, energy-efficient, LED flush mount ceiling light
- SPEEDMOUNT® Kit included
- Damp Location Rated

#### SPECIFICATIONS

##### Construction

- PC Housing and Shade
- E26 Medium Base

##### Optics

- High impact, acrylic shade for zero pixelation and overall visual comfort
- Uniform, even light distribution

##### Installation


- Twists into most E26 medium based socket/lamp holder (integrated E26 base)
- Also includes a SPEEDMOUNT® Kit for remodel and new construction installations—converts a junction box into a lamp holder
- Field select CCT using integral switch behind the lens prior to installation. Ships at 3000K

##### Electrical

- > 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Non-Dimmable
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located inside fixture.

##### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

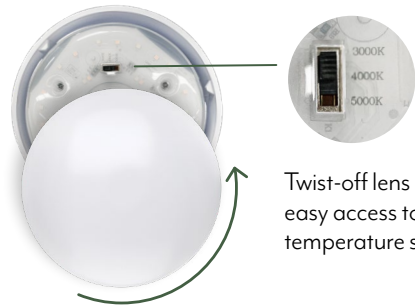

Twist-off lens gives easy access to color temperature select switch.

**spinLight®**

**3 Color Preference®**



KEY DATA	
LUMEN RANGE	977 – 1061
WATTAGE RANGE	10.05 – 10.07
EFFICACY RANGE (LPW)	97 – 105
REPORTED LIFE (HOURS)	L70 / > 160,000


#### Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



# SL | 7" SPIN LIGHT FLUSH MOUNT | 3 CCT COLOR PREFERENCE®

## CATALOG LOGIC

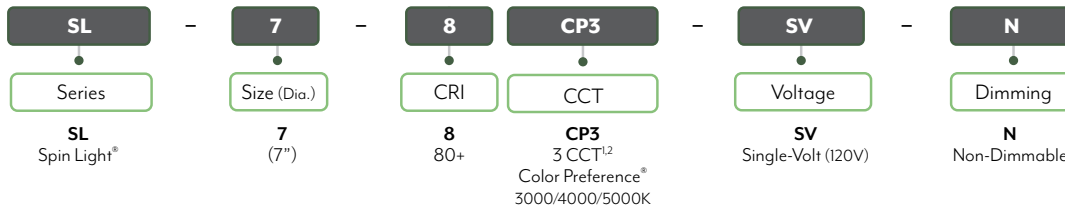

Notes:


1. Ships at lowest CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

## STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG. <sup>1</sup>	DELIVERED LUMENS	LPW	VOLTAGE	DIMMABILITY
SL-7IN-8CP3-SV-N	C02002403D	7" Spin Light® Flush Mount	5	80+	3000K	10.5	1000	977	97	120V	Non-Dimmable
					4000K	10.5	1000	1061	105		
					5000K	10.5	1000	1043	104		

Notes: 1. For more delivered lumens and test data see below, or visit ETISSL.com

## DIMENSIONS / DETAILS

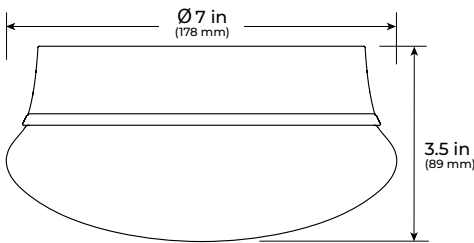

**Unit Weight**  
0.8 lbs.



CP3:  
Ships at 3000K

## MOUNTING (Included)


# SpinLight®

QUICK AND EASY INSTALLATION

- Included:
- SpeedMount™ Socket
  - Mounting Plate Screws
  - Wire Connectors



Easily twists into existing lamp holder, just like a light bulb



## PHOTOMETRIC SAMPLE




**Luminaire Data:** at 4000K

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>1061</b>
WATTAGE	<b>10.07 W</b>
EFFICACY	<b>105</b>
BEAM ANGLE	<b>50% = 123.8°</b> <b>10% = 90.0°</b>
SPACING	<b>0° = 1.29 90° = 1.28</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

## Candela Plot



## PERFORMANCE / Data

### Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 89%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 160,000

### Load Information

<b>Power Factor</b>	> 0.90
<b>THD</b>	< 20%
<b>Frequency</b>	60 Hz
<b>Low Temp Start / Max Temp</b>	-20° C (-4° F) / 40° C (104° F)



ETI Lighting  
4873 Thurmon Tanner Parkway, Flowery Branch, GA 30542 | TEL: 1.855.384.7754  
E-mail: ETIorders@ETISSL.com | ETISSL.com

All specifications are subject to change without notice.  
All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).  
Actual performance can vary slightly as a result of end-user application & environment.

SL\_C02002403D\_Spec | Page 2 of 2 | February 25, 2025