

ANSH | ANOMA 46" LED SHOP LIGHTS

WITH PULL CHAIN | 4000K | ATTACHED 5' PLUG

KEY FEATURES

- Switch Between 3 Power Levels Via Pull Chain
Standard Output: 4100 | 5800 | 7500 lm
20 | 60 | 80W **High Output:** 7200 | 10600 | 13600 lm
67 | 100 | 133W
- Convenient 5' Plug-In Cord
- Pull chain with ETI finial
- 4000K, 80+ CRI
- Linkable: Up to 2 on the High Output Model, up to 3 on the Standard Model

SPECIFICATIONS

Construction & Optics

- Metal Housing with Diamond Plate Texture and Black End Caps
- Convenient 19" Pull Chain with ETI Finial
- Frosted lens for reduced glare
- 5' Plug-In Cord

Installation

- Dry Wall and Hanging Mounting Kits included
- Linkable: Up to 2 on the High Output Model, up to 3 on the Standard Model
- Simple-Install with 5' Plug-In Cord


Electrical

- > 150,000 hour LEDs at L70 for reduced maintenance
- Use pull chain to cycle between 3 power levels
- Linkable: Up to 2 on the High Output Model, up to 3 on the Standard Model
- Operates at 120V, 60Hz
- Non-Dimmable
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)

Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)



DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

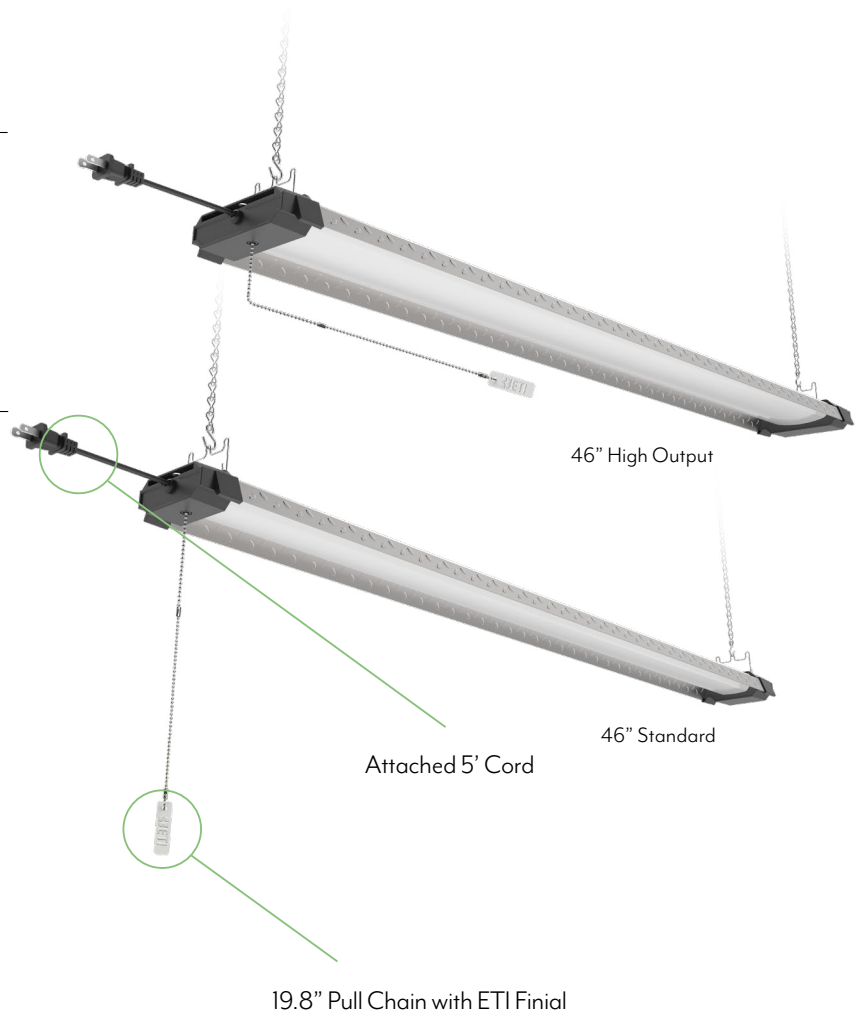

KEY DATA	
LUMEN RANGE	4150 – 13681
WATTAGE RANGE	40.0 – 131.0
EFFICACY (LPW) @HIGHEST SETTING	98 – 114
REPORTED LIFE (HOURS)	L70 / > 150,000

Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations



CATALOG LOGIC

ANSH

Series

ANSH
Anoma
Shop Light

-

46

Size

46 (46")
46HO (46" Hight Output)

-

8

CRI

8
80+ CRI

-

40K

CCT

40K
4000K

-

SV

Voltage

SV
Single-Volt (120V)

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG. ¹	DELIVERED LUMENS	LPW	VOLTAGE	DIM
ANSH-46-840K-SV	B02014601A	Anoma 46" LED Shop Light Standard Output	4	80+	4000K	40	4000	4150	104	120V	Non-Dimmable
						60	5500	5968	102		
						80	7500	7577	98		
ANSH-46HO-840K-SV	B02015601A	Anoma 46" LED Shop Light High Output	4	80+	4000K	65	7200	7267	114	120V	Non-Dimmable
						100	10000	10663	109		
						130	13000	13681	104		

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com

DIMENSIONS / DETAILS

5' Cord

Product	L (in.)	L (mm)	W (in.)	W (mm)	H (in.)	H (mm)	weight
46" LED Shop Light	46"	1168	4.5"	115	1.7"	42	2.49 lbs.
46" LED Shop Light HO	46"	1168	6.1"	155	1.7"	42	3.22 lbs.

MOUNTING

Easy Installation

Includes Dry Wall & Hanging Mounting Kits Plus attached 5' Cord

Lumen Maintenance	
Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89.49%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 150,000

Load Information	
Power Factor	> 0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-4°F to 104°F (-20°C to 40°C)

PHOTOMETRY

46"

IES

Luminaire Data:

CCT & CRI	4000K, 80+ CRI
DELIVERED LUMENS	4365 3481 2680
WATTAGE	77.3 58.6 40.0
EFFICACY	98 102 104
SPACING	0° = 1.29 / 90° = 1.33

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

Legend: HIGH (dark green), MID (medium green), LOW (light green)

46" HO

IES

Luminaire Data:

CCT & CRI	4000K, 80+ CRI
DELIVERED LUMENS	13681 10663 7276
WATTAGE	131.0 98.1 64.1
EFFICACY	104 109 114
SPACING	0° = 1.29 / 90° = 1.28

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

Legend: HIGH (dark green), MID (medium green), LOW (light green)