



SH | 42" LED SHOP LIGHTS WITH PULL CHAIN 4000K | ATTACHED 5' PLUG

KEY FEATURES

- Convenient 5' Plug-In Cord
- Pull chain with ETI finial
- 4000K, 80+ CRI
- Linkable: Up to 4 on the High Output Model, up to 6 on the Standard Model

SPECIFICATIONS

Construction & Optics

- White plastic housing
- Convenient 19" Pull Chain with ETI Finial
- Frosted lens for reduced glare
- 5' Plug-In Cord

Installation

- Dry Wall and Hanging Mounting Kits included
- Linkable: Up to 4 on the High Output Model, up to 6 on the Standard Model
- Simple-Install with 5' Plug-In Cord


Electrical

- 150,000 hour LEDs at L70 for reduced maintenance
- Linkable: Up to 4 on the High Output Model, up to 6 on the Standard Model
- Operates at 120V, 60Hz
- Non-Dimmable
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)

Warranty

5-Year Standard Warranty. See terms at: ETISSL.com/warranty/


DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

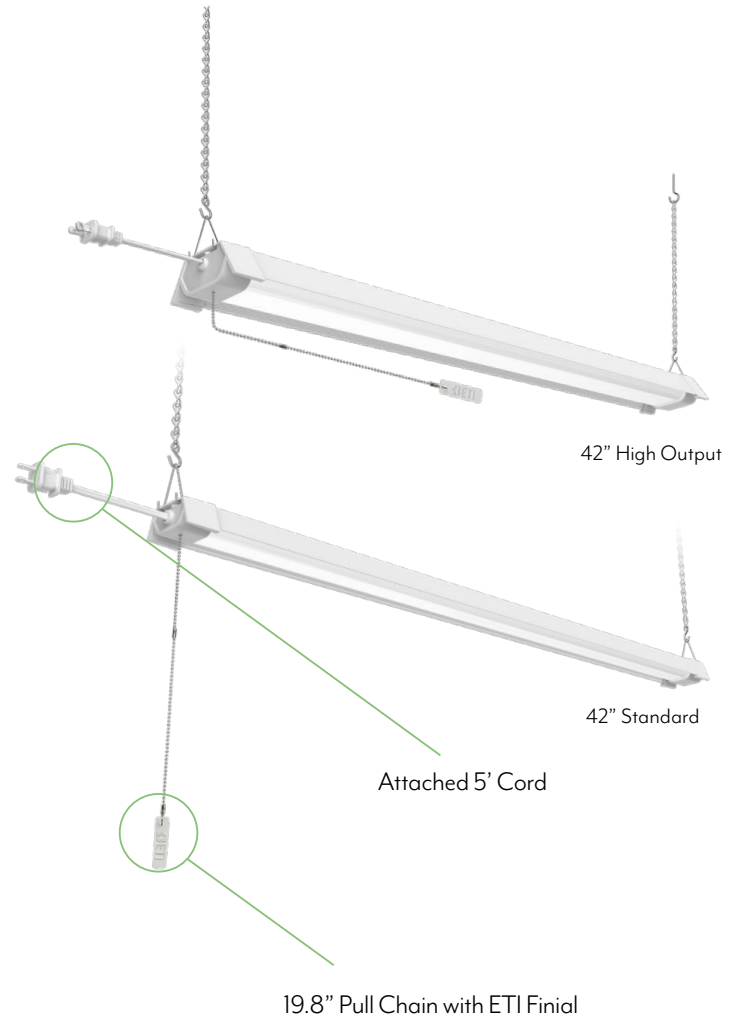

KEY DATA	
LUMEN RANGE	4236 – 6279
WATTAGE RANGE	40.5 – 64.3
EFFICACY RANGE (LPW)	98 – 105
REPORTED LIFE (HOURS)	L70 / 150,000

Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations



ETI Lighting
4873 Thurmon Tanner Parkway, Flowery Branch, GA 30542 | TEL: 1.855.384.7754
E-mail: ETIorders@ETISSL.com | ETISSL.com

All specifications are subject to change without notice.
All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.

Shop_Light_B02012or3_XXXXA_Spec | Page 1 of 3 | February 5, 2025

CATALOG LOGIC

SH

Series

SH

Shop Light

-

42

Size

42 (42")

42HO (42" High Output)

-

8

CRI

8

80+ CRI

40K

CCT

40K

4000K

-

SV

Voltage

SV

Single-Volt (120V)

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG. ¹	DELIVERED LUMENS	LPW	VOLTAGE	DIM
SH-42-840K-SV	B02012601A	42" LED Shop Light Standard Output	4	80+	4000K	42	4200	4236	105	120V	Non-Dimmable
SH-42HO-840K-SV	B02013601A	42" LED Shop Light High Output	4	80+	4000K	65	6200	6279	98	120V	Non-Dimmable

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com

DIMENSIONS / DETAILS

Product	L (in.)	L (mm)	W (in.)	W (mm)	H (in.)	H (mm)	weight
46" LED Shop Light	42.1"	1070	2.6"	65	1.2"	30	1.08 lbs.
46" LED Shop Light HO	42.1"	1070	4.6"	118	1.8"	45	1.54 lbs.

MOUNTING

Easy Installation

Includes Dry Wall & Hanging Mounting Kits Plus attached 5' Cord

PERFORMANCE / Data

Lumen Maintenance	
Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	88.35%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	150,000
Load Information	
Power Factor	> 0.70
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-4°F to 104°F (-20°C to 40°C)

PHOTOMETRY

42"

IES

Luminaire Data:

CCT & CRI	4000K, 80+ CRI
DELIVERED LUMENS	4236
WATTAGE	40.5W
EFFICACY	105
BEAM ANGLE	50%=108.3° 10%=163.1°
SPACING	0° = 1.24 90° = 1.21

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

0° H 90° H

42" HO

IES

Luminaire Data:

CCT & CRI	4000K, 80+ CRI
DELIVERED LUMENS	4236
WATTAGE	64.3W
EFFICACY	98
BEAM ANGLE	50%=108.3° 10%=163.1°
SPACING	0° = 1.28 90° = 1.26

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

0° H 90° H