




Commercial | Industrial | Residential

LED Lighting Catalog

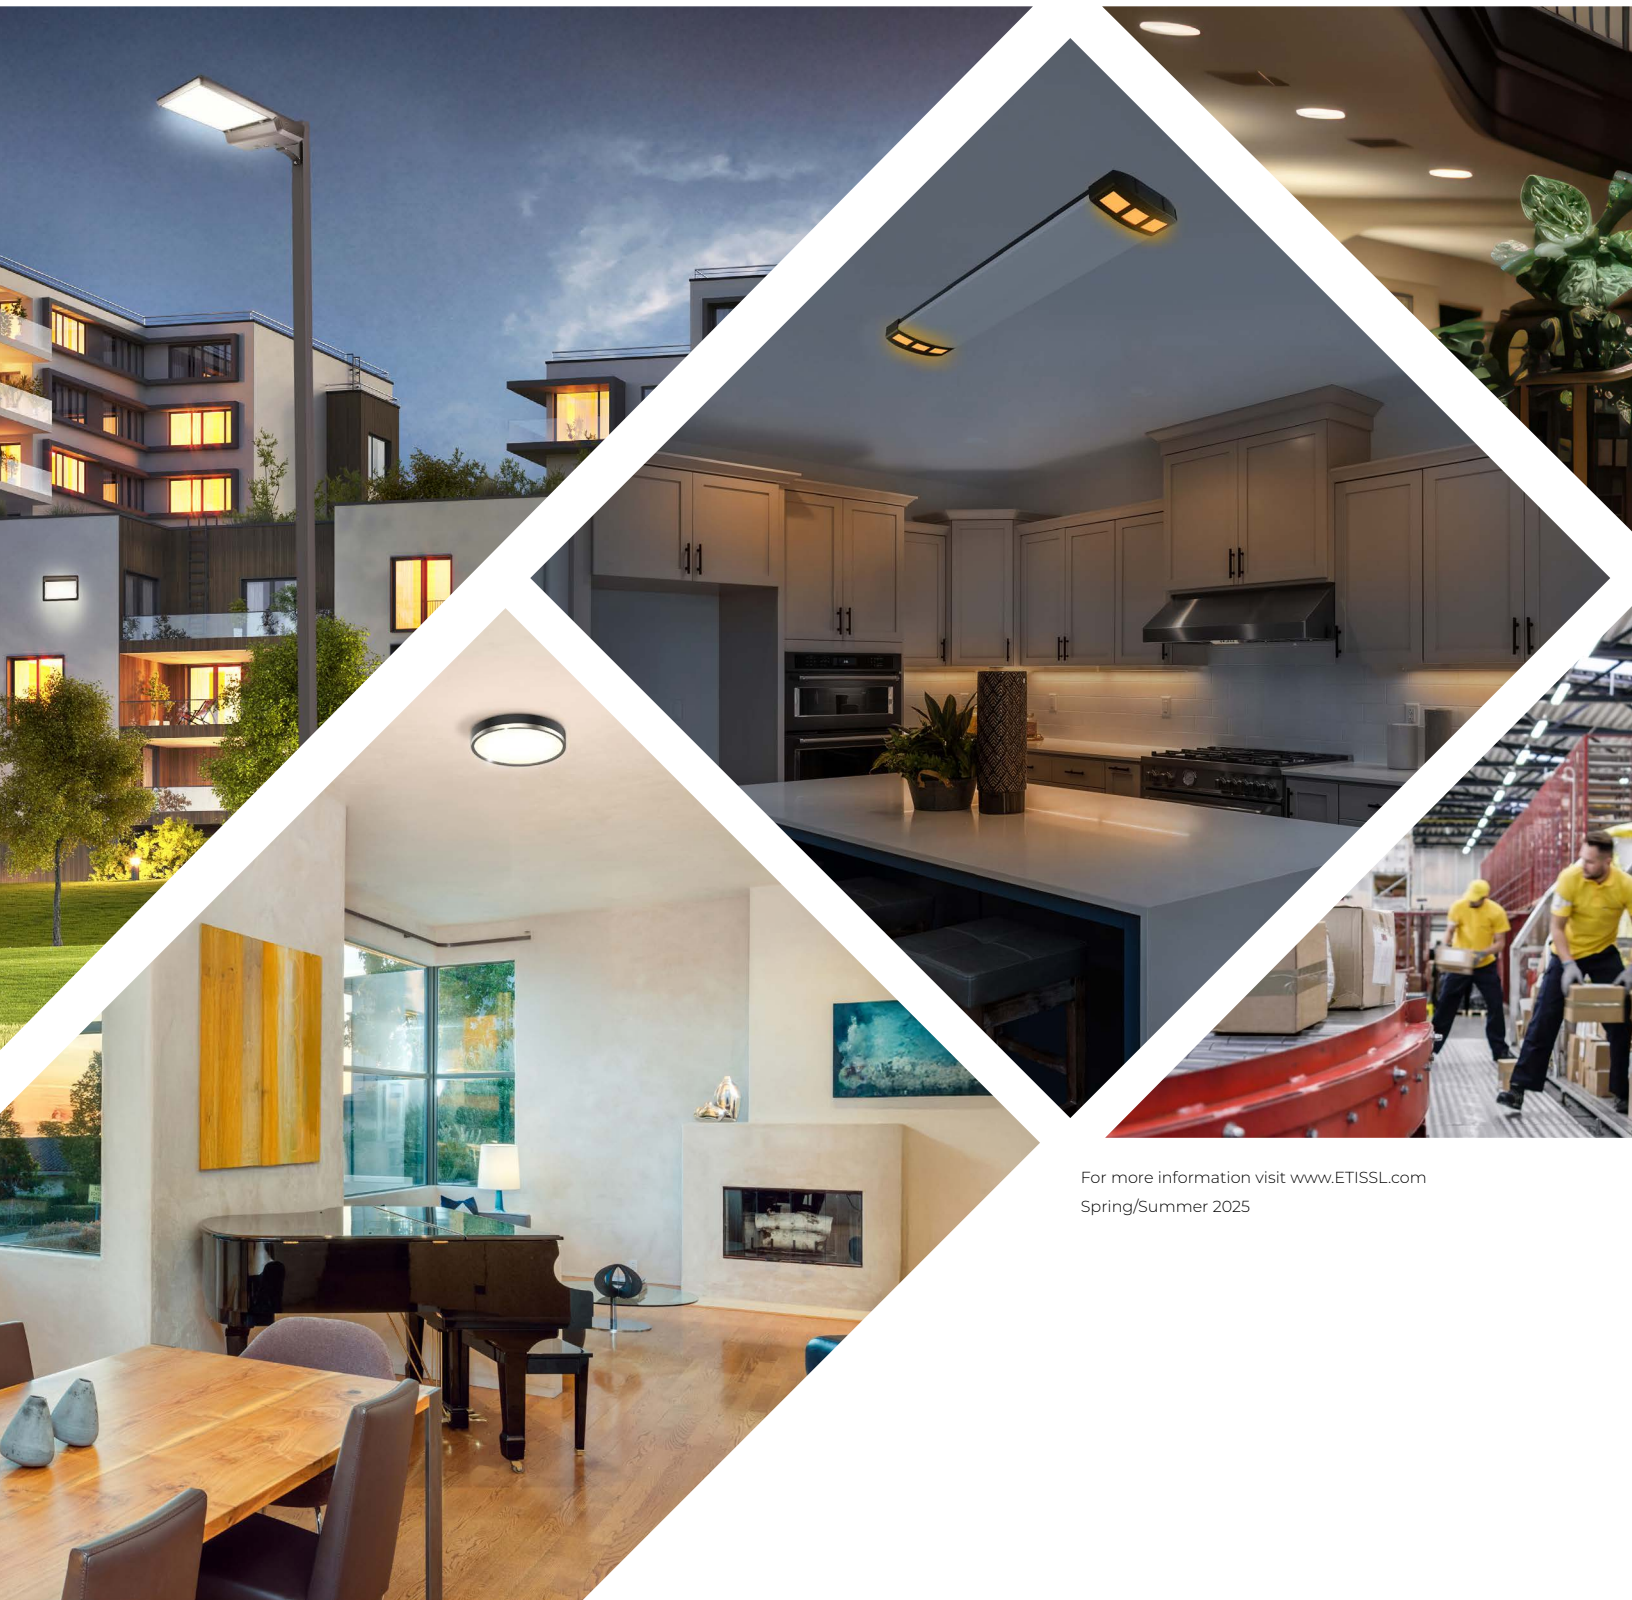

For more information visit www.ETISSL.com
Spring/Summer 2025



ENERGY SAVING SOLUTIONS FOR INTERIOR AND EXTERIOR SPACES

Table of Contents

INDOOR

Troffers	14
Flat Panels	16
Linear LED	18
Wraps	20
Strip Lights	31
Shop Lights	36
Under Cabinet Lights	43
Commercial Downlights	53
Commercial/Residential Downlights	58
Residential Downlights	62
Flush Mounts	84
SpinLights	108

OUTDOOR & EGRESS

Flush Mounts	128
Canopies	130
Marine Bulk Heads	131
Flood Lights	134
Area Lights	140
Poles	143
Wall Packs	146
Security Lights	155
Exit & Emergency	158

INDUSTRIAL

Vapor Tights	162
High Bay	167
T-LED Tubes	175

A Unique Approach. Extraordinary Results.

Our manufacturing capabilities, end-user-driven collaborative product development capability, and global management team have established ETI Solid State Lighting as a leading LED lighting brand as well as one of the largest manufacturers of LED lighting products to the North America market.

Our new North American corporate headquarters with 111,000 square feet of space is located in Flowery Branch, Georgia



A Global R&D Operation

Spans 29
countries

5 Teams of
Industrial
Designers

40+
Product
Engineers

ETI is a Subsidiary of NVC International

- **Manufacturing**
NVC International, ETI's parent company, is among the largest lighting manufacturers in the world with over 6 million sq. ft. of manufacturing space and 10,000 employees. Our expanded manufacturing footprint in Vietnam will allow ETI to continue to offer our customers innovative, high-quality LED lighting products at a competitive price.
- **Global Operation**
NVC International's operation spans 29 countries with five regional sales offices across the USA, Europe, Asia, and the Middle East. As a 100% vertically integrated global supplier of LED components, lamps, and luminaires, we sell to many of the largest lighting brands and retailers in the world.
- **Quality & Innovation**
Our state-of-the-art, patented products feature high-quality Samsung LEDs. Our robust product development organization features four R&D centers and over 90 mechanical and electrical engineers.
- **Global Partnerships**
ETI with NVC International and Samsung are proud to be strategic LED partners. Our lighting products feature Samsung's high-quality LEDs.



ETI SSL is a NVC Company



INNOVATE. ILLUMINATE. INSPIRE.

Dependable Flexibility

At ETI, we deliver professional-grade excellence to all, ensuring our premium lighting products are accessible to everyone. That’s why our high-performance, high-quality LED luminaires are deliberately designed with the experience and needs of our customers in mind. We **innovate** to ensure every light we create improves the residential, commercial, or industrial space it inhabits. We craft products that seamlessly blend into your life. We want to **illuminate** the moments that matter to you most, because we believe every moment deserves the perfect light. Join us on our journey as we redefine what’s possible and **inspire** a brighter future.

ETI Pillars



Defined by Dependability

Through meticulous manufacturing processes and rigorous quality control measures, we ensure that our products are built to last and perform consistently over time.



Smart & Simple Innovation

Simplicity is our priority. While our technology keeps advancing, we refuse to sacrifice user experience for the sake of innovation.




Here For You

Whether you have a new DIY or corporate project, we’re here to help. With How-to’s, interactive user guides, and video tutorials, we strive to empower you with the knowledge and tools you need to succeed.



Inspired Craftsmanship

With complete control over the production process, we create tailor-made lighting solutions. Our in-house manufacturing capabilities allow us to customize solutions and provide unmatched reliability and confidence.

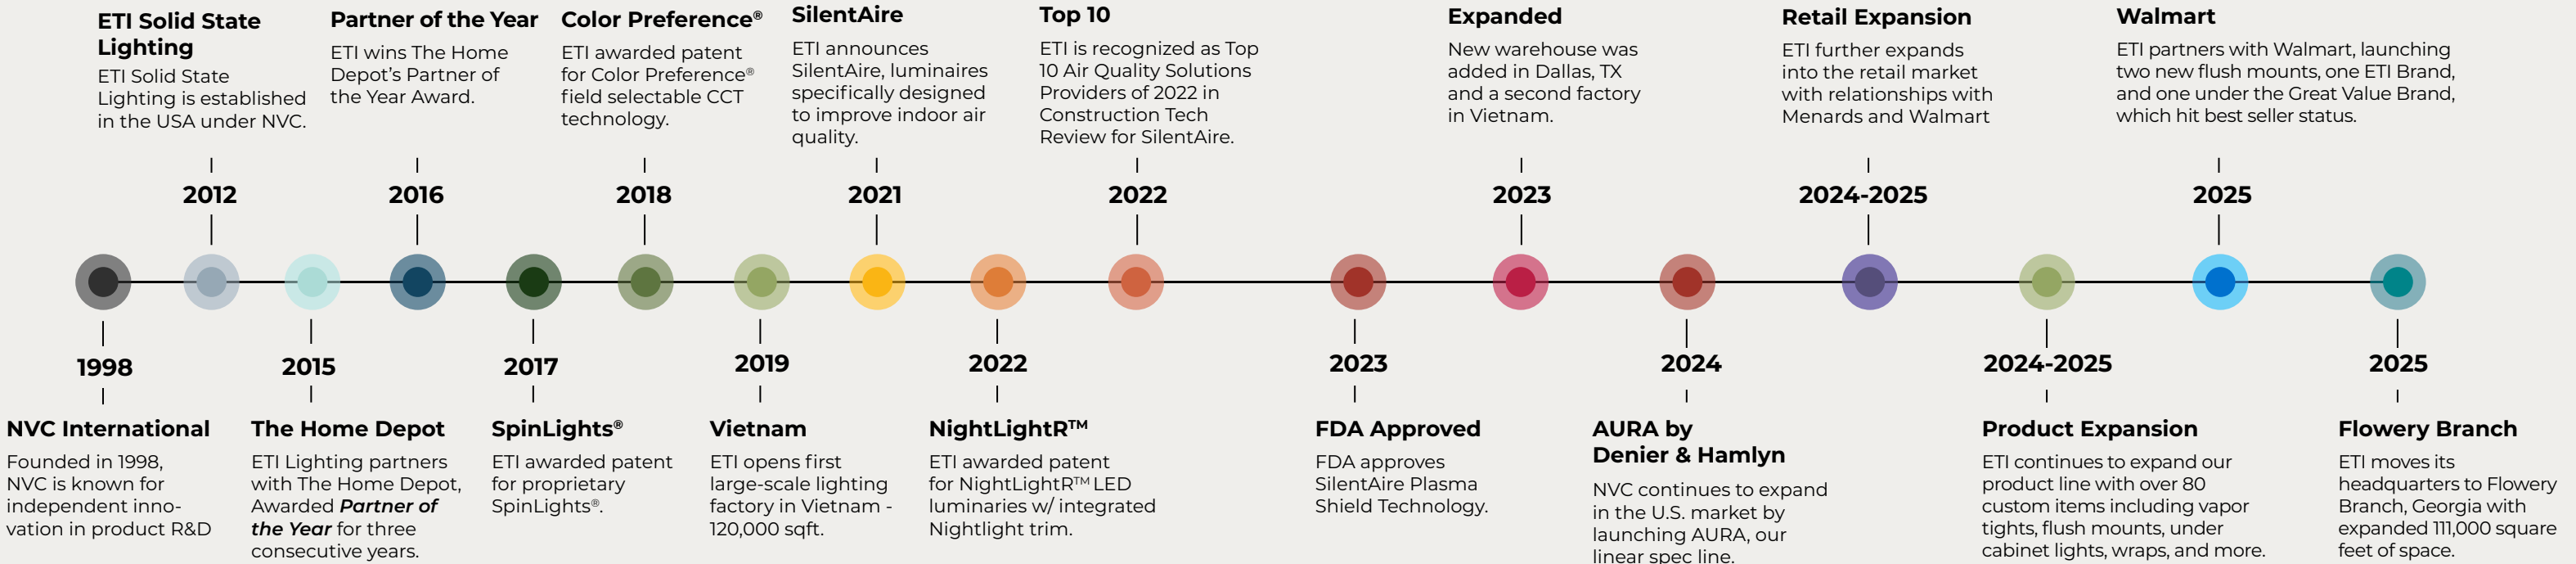

ETI's LIGHTING TOOLKIT

ETI now offers a **Rebate Catalog and Payback Calculator**. These tools help customers take advantage of rebates and achieve faster return on investments. They are easy to use and show instant online cost assessments to help meet project budgets.

You can find the Payback Calculator & Rebate Catalog in the Resources section on our website.



COST-SAVING BENEFITS


ETI designs cost savings and energy efficiency into every aspect of our business—from dynamic product offerings to lighting tools that help you meet and exceed expectations, we have you covered.

- 1** ETI's products have superb lumen maintenance and low energy and maintenance costs—resulting in fast ROI. With 1/3 the energy costs and zero maintenance costs, switching to ETI's LED luminaires is the obvious choice.



- 2** ETI offers additional costs savings through MTO options, including OC Sensors. We also have many products which are 0-10V dimmable, have photocells or are compatible with daylight harvest sensors.
- 3** Many of our products also have Selectable Power, so that wattage consumption can be fine tuned.

ETI's tool kit can help you determine payback and environmental impact with the click of a button.

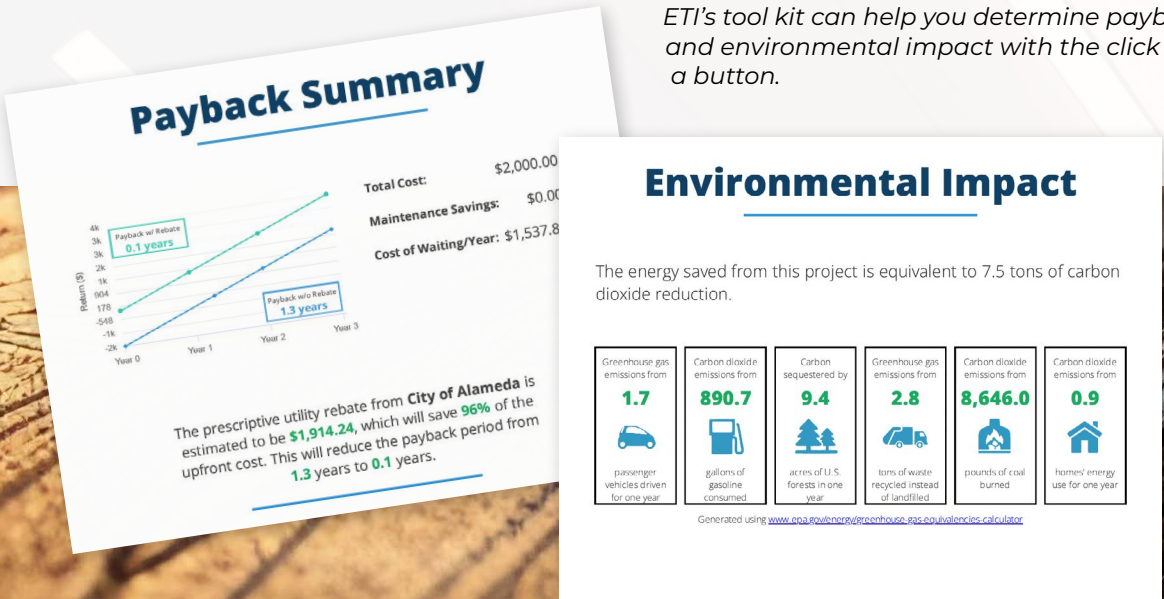

ETI Exclusive Features

Patented Innovation



Lumen Boost® allows users to select the best light output for their lighting area. Easily adjustable intensity meets the needs of different room sizes and adjusts for user preferences and activities.



ETI's Color Preference® technology offers a range of CCT choices in a single fixture, from 2700K to 5000K, depending on the product. Adjust the switch on the back of the ETI fixture to achieve your desired room ambiance.



NightLightR™

Our NightLightR™ models include a built-in 2000K CCT Nightlight trim. Switch between white light and nightlight modes by simply flipping your room's light switch On/Off/On within three seconds.


Effortless Installation



ETI constantly innovates lighting fixture installations to enhance customer experience. From wrap lights with hinged lens covers to screwing in fixtures with ETI's patented SpinLight® collection. ETI remains committed to developing technologies that make fixture installation effortless.



TwistFit™ Mounting System offers a fast and tool-free installation method for luminaires. Attach the included TwistFit™ bracket to a j-box, then effortlessly twist the fixture into the bracket for secure installation.

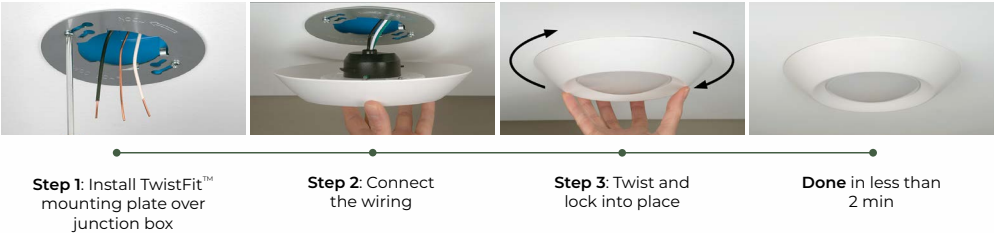





SnapFit™ Mounting System revolutionizes luminaire installation with its quick and easy process. Secure the included SnapFit™ bracket to a j-box, then effortlessly snap the fixture into place without the need for any tools.



SpinLight® fixtures converts any standard lamp holder into an attractive LED light fixture that saves energy and maintenance.



Icon Reference Guide

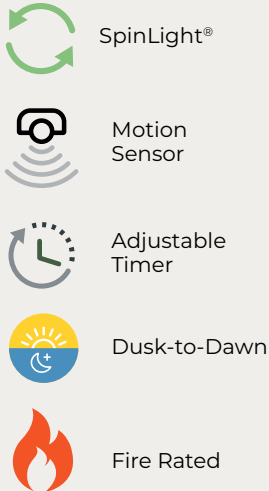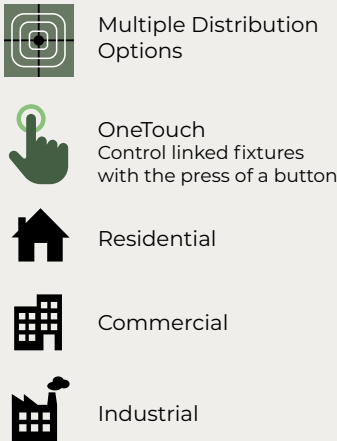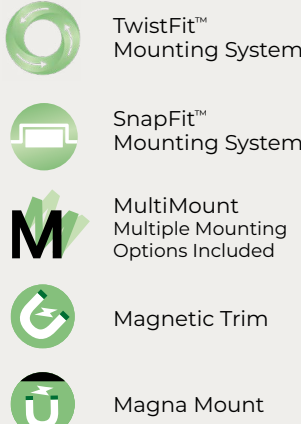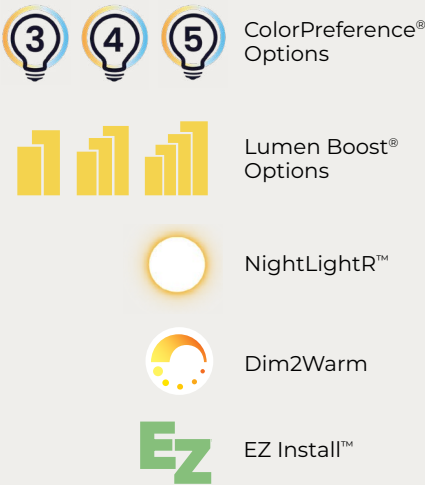

INDOOR



ETI's indoor lighting collection, where innovation meets functionality.

Our extensive line of light fixtures is designed to illuminate your spaces with precision and style. From troffers and flat panels to wrap lights, strip lights, downlights, and flush mounts, we offer a diverse range of options to suit any indoor setting.



Whether you're seeking efficient lighting solutions for offices, commercial buildings, or residential spaces, our products deliver exceptional performance and aesthetic appeal. Discover the perfect balance of quality craftsmanship and cutting-edge technology in our indoor lighting collection.



BCB | Boost Center Basket Troffers


4 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®



KEY FEATURES

ETI's Boost Center Basket LED Troffer series features a slim design for shallow plenums. Applications: Ideal for offices, back of house and other.

- **Color Preference®** Select from 3 CCTs (3500/4000/5000K)
- **Lumen Boost®** Select from 4 lumen levels
- Overall height of 1.38" to fit shallow plenums
- IC rated for direct contact with insulation
- Mounting clips for grid included
- Surface mount and suspension kit accessories available
- 0-10V dimming
- Rated Life (L70) 100,000 Hours

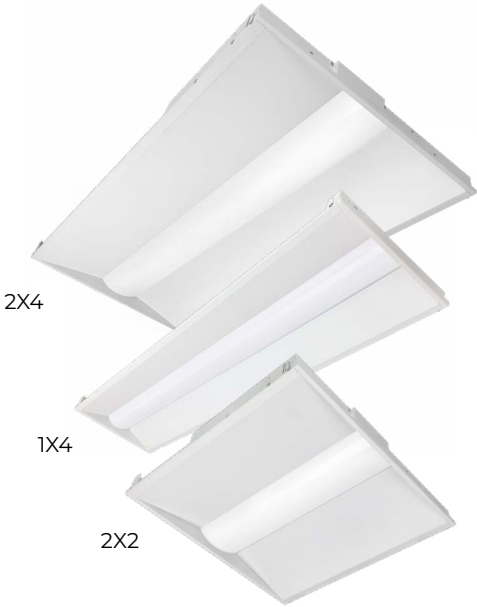

Integrated housing guide clips provide easy installation into recessed grid

CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming	BBU	OC Sensor
BCB Boost Center Basket		LB4 4 Lumen Boost®	8 80+ CRI	CP3 3500K 4000K 5000K	MV Multi-Volt 120-277V	LVD 0-10V Dimming	EM* External BBU BLANK No BBU	MS* Integral OC Sensor BLANK No Sensor
	24 (2X4) up to 5850 lm	Lumen Pkg 24 24 29 32 39W						
	22 (2X2) up to 4350 lm	Lumen Pkg 22 15 19 24 29W						
	14 (1X4) up to 4350 lm	Lumen Pkg 14 15 19 24 29W						
	Lumen Values are Nominal/Approximate							

STOCK ORDERING INFORMATION


	Catalog / Part #	Order #	Description	Wattage Levels	Delivered Lumen Range (LB4)	CCT CP4	CRI	Volt.	Dim	DLC
2' x 4'	BCB-24-LB4-8-CP3-MV-LVD	64702301	Boost Center Basket, 2' x 4' Troffer	24	3483 – 4210	3500K 4000K 5000K	80+	120-277V	0-10V	Premium
				29	4121 – 4210					
				32	4634 – 4791					
				39	5546 – 5707					
2' x 2'	BCB-22-LB4-8-CP3-MV-LVD	64701301	Boost Center Basket, 2' x 2' Troffer	15	2157 – 2220	3500K 4000K 5000K	80+	120-277V	0-10V	Standard
				19	2590 – 2720					
				24	3192 – 3343					
				29	4003 – 4172					
1' x 4'	BCB-14-LB4-8-CP3-MV-LVD	64706201	Boost Center Basket, 1' x 4' Troffer	15	2158 – 2222	3500K 4000K 5000K	80+	120-277V	0-10V	Standard
				19	2599 – 2721					
				24	3189 – 3353					
				29	4013 – 4182					

BCB | Boost Center Basket Troffers

4 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

ACCESSORIES (Order Separately, Field Install)


Catalog / Part #	Order #	Description
EM-8W	70117101	Boost Center Basket Emergency Battery Backup
BCB-MS	70217101	Boost Center Basket Microwave Sensor
BCB-24-SMK	70328101	2x4 Boost Center Basket, Surface Mount Kit
BCB-22-SMK	70329101	2x2 Boost Center Basket, Surface Mount Kit
BCB-14-SMK	70330101	1x4 Boost Center Basket, Surface Mount Kit
BCB-24-DWK	70331101	2x4 Boost Center Basket, Drywall Kit
BCB-22-DWK	70332101	2x2 Boost Center Basket, Drywall Kit
BCB-14-DWK	70333101	1x4 Boost Center Basket, Drywall Kit
BCB-ACC	70334101	Boost Center Basket Air Craft Cable Kit

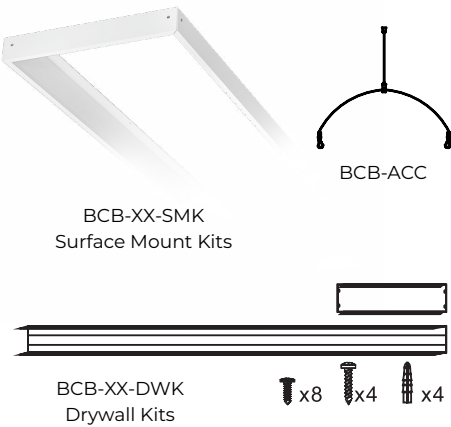

MADE TO ORDER OPTIONS (Lead times apply)


Catalog / Part #	Order #	Description
BCB-24-LB4-8-CP3-MV-LVD-EM	64702301-EM	Boost Center Basket, 2' x 4' Troffer with Battery Backup
BCB-22-LB4-8-CP3-MV-LVD-EM	64701301-EM	Boost Center Basket, 2' x 2' Troffer with Battery Backup
BCB-14-LB4-8-CP3-MV-LVD-EM	64706201-EM	Boost Center Basket, 1' x 4' Troffer with Battery Backup
BCB-24-LB4-8-CP3-MV-LVD-MS	64702301-I	Boost Center Basket, 2' x 4' Troffer with Internal Motion Sensor
BCB-22-LB4-8-CP3-MV-LVD-MS	64701301-I	Boost Center Basket, 2' x 2' Troffer with Internal Motion Sensor
BCB-14-LB4-8-CP3-MV-LVD-MS	64706201-I	Boost Center Basket, 1' x 4' Troffer with Internal Motion Sensor
BCB-24-LB4-8-CP3-MV-LVD-EM-MS	64702301-I-EM	Boost Center Basket, 2' x 4' Troffer with Battery Backup and Internal Motion Sensor
BCB-22-LB4-8-CP3-MV-LVD-EM-MS	64701301-I-EM	Boost Center Basket, 2' x 2' Troffer with Battery Backup and Internal Motion Sensor
BCB-14-LB4-8-CP3-MV-LVD-EM-MS	64706201-I-EM	Boost Center Basket, 1' x 4' Troffer with Battery Backup and Internal Motion Sensor

DIMENSIONS

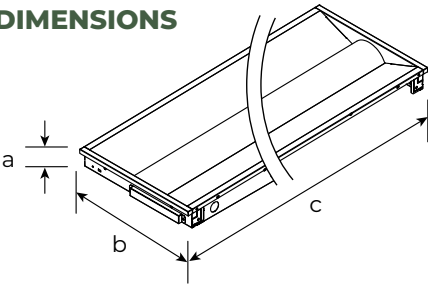

Model	a	b	c	weight (lbs)
2X4	2.2"	23.8"	47.7"	11.7
2X2	2.2"	23.8"	23.8"	7.5
1X4	1.8"	11.8"	47.7"	9

PLOT




MSFP | Multi-Select Flat Panels
3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®



KEY FEATURES

Each back-lit luminaire is ultra thin with an overall height of 1.69" to fit shallow plenums and are IC rated for direct contact with insulation. Applications: Great for offices, back of house and other commercial uses where flexibility and 0-10V Dimming are needed.

- **Color Preference®** Select from 3 CCTs (3500K, 4000K, 5000K)
- **Lumen Boost®** Select from 4 lumen levels
- Overall height of 1.69" to fit shallow plenums
- IC rated for direct contact with insulation
- Mounting clips for grid included
- Surface mount and suspension kit accessories available
- 0-10V dimming
- Rated Life (L70) > 60,000 hours.

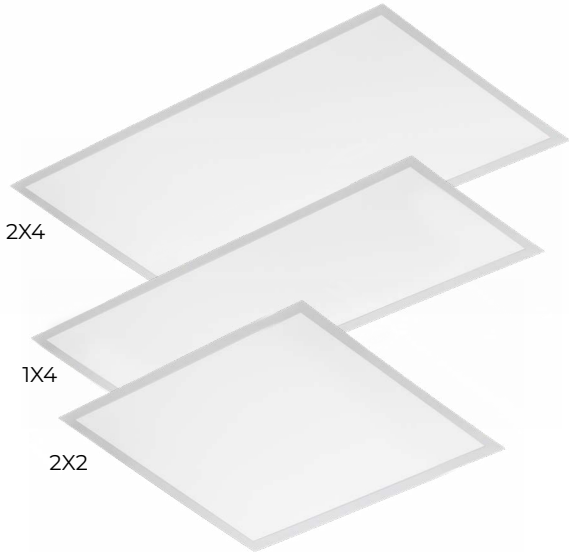

Great for Shallow Plenums
1.69" Depth



Integrated mounting clips included to install into recessed grid

CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming	BBU
MSFP Multi-Select Flat Panels		LB3 3 Lumen Boost®	8 80+ CRI	CP3 3500K 4000K 5000K	MV Multi-Volt 120-277V	LVD 0-10V Dimming	EMB08* Emergency Battery Backup 7.6W BLANK No BBU
	24 (2X4) 3300 – 5500 lm	Lumen Pkg 24 30 40 50W					
	22 (2X2) 2200 – 4400 lm	Lumen Pkg 22 20 30 40W					
	14 (1X4) 2200 – 4400 lm	Lumen Pkg 14 20 30 40W					

Lumen Values are Nominal/Approximate

*EMB08 is MTO only. Lead times apply.


STOCK ORDERING INFORMATION

	Catalog / Part #	Order #	Description	Wattage Levels	Delivered Lumen Range (LB3)	CCT CP4	CRI	Volt.	Dim
2' x 4'	MSFP-24-LB3-8-CP3-MV-LVD	64224401	2'x4' Multi-Select Flat Panel	30	3221 – 3417	3500K 4000K 5000K	80+	120-277V	0-10V
				40	4171 – 4470				
				50	5134 – 5502				
2' x 2'	MSFP-22-LB3-8-CP3-MV-LVD	64222501	2'x2' Multi-Select Flat Panel	20	2130 – 2293	3500K 4000K 5000K	80+	120-277V	0-10V
				30	3232 – 3412				
				40	4226 – 4727				
1' x 4'	MSFP-14-LB3-8-CP3-MV-LVD	64214201	1'x4' Multi-Select Flat Panel	20	2304 – 2476	3500K 4000K 5000K	80+	120-277V	0-10V
				30	3387 – 3518				
				40	4213 – 4505				

MSFP | Multi-Select Flat Panels
3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
MSFP-SMK-24	70345101	2X4 Multi-Select Flat Panel Surface Mount Kit (White)
MSFP-SMK-22	70343101	2X2 Multi-Select Flat Panel Surface Mount Kit (White)
MSFP-SMK-14	70344101	1X4 Multi-Select Flat Panel Surface Mount Kit (White)
MSFP-SUSP-KIT-2C	70346101	2-Cable Suspension Mount Kit (max 3')




Surface Mount Kit 2X4


Surface Mount Kit 1X4

Surface Mount Kit 2X2

PLOT



DIMENSIONS

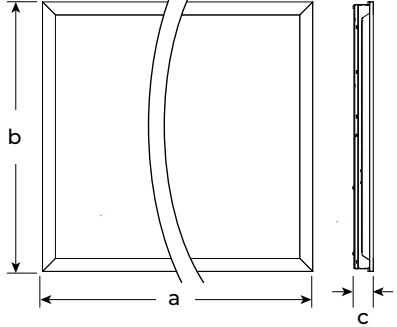


MADE TO ORDER OPTIONS (Lead times apply)

Catalog / Part #	Order #	Description
MSFP-24-LB3-8-CP3-MV-LVD-EMB08	64224401-EM	2'x4' Flat Panel with Emergency Battery Backup
MSFP-22-LB3-8-CP3-MV-LVD-EMB08	64222501-EM	2'x2' Flat Panel with Emergency Battery Backup
MSFP-14-LB3-8-CP3-MV-LVD-EMB08	64214201-EM	1'x4' Flat Panel with Emergency Battery Backup

Model	a	b	c	weight (lbs)
2X4	23.74"	47.76"	1.69"	8.36
2X2	23.74"	23.74"	1.69"	4.40
1X4	11.93"	47.76"	1.69"	4.84



LLF | 4' Architectural Linear LED Fixtures
3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING



KEY FEATURES

ETI's Architectural Linear Series offers a contemporary luminaire that can be linked together for seamless form and function. They are an elegant solution for multiple applications, including educational facilities, offices, hospitality venues, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 3500K, 4000K)
- Multiple mounting accessories available
- Flush opal polycarbonate lens for a seamless design and uniform light distribution
- 0-10V dimming
- Long Life: Rated >50,000 hours (L70)



CATALOG LOGIC

Series	Wattage	Efficacy	Voltage	Dimming	Finish
LLF Architectural Linear Light Fixture	40W	115 Up to 115 LPW	MV Multi-Volt 120-277V	LVD 0-10V Dimming	WHT White BLK Black

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
LLF-40W-115-MV-LVD-WHT	64407101	4' Architectural Linear Light, White Finish	6	40W	4725 – 4988	3000/3500/4000K	80+	120-277V	0-10V
LLF-40W-115-MV-LVD-BLK	64407102	4' Architectural Linear Light, Black Finish	6	40W	4488 – 4730	3000/3500/4000K	80+	120-277V	0-10V



LLF | 4' Architectural Linear LED Fixtures
3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING


ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
LLF-SCL-2.75IN	70326101	Straight Run Joiner Kit 4FT to 4FT
LLF-RF-4FT-WHT	70324101	4FT Recessed Flange Kit, White Finish
LLF-RF-4FT-BLK	70324102	4FT Recessed Flange Kit, Black Finish
LLF-TC-4FT	70327101	T-Grid Bar Surface Mounting Kit
LLF-RMI-4FT	70325101	Drywall/Mud-In Recessed Mounting Kit
LLF-8FTAC-CC-WHT	70322101	8FT Suspension Mounting Kit, White Finish
LLF-8FTAC-CC-BLK	70322102	8FT Suspension Mounting Kit, Black Finish
LLF-8FT5W-PW-WHT	70323102	8FT 5-wire Power Cord Kit, White Finish
LLF-8FT5W-PW-BLK	70323101	8FT 5-wire Power Cord Kit, Black Finish


MOUNTING ACCESSORIES




Straight Run Joiner Kit
4FT to 4FT
LLF-SCL-2.75IN



4FT Recessed Flange Kit,
White Finish
LLF-RF-4FT-WHT




4FT Recessed Flange Kit,
Black Finish
LLF-RF-4FT-BLK



T-Grid Bar Surface
Mounting Kit
LLF-TC-4FT



Drywall /
Mud-In Recessed
Mounting Kit
LLF-RMI-4FT



8FT 5-wire Power Cord Kit,
White Finish
LLF-8FT5W-PW-WHT



8FT 5-wire Power Cord Kit,
Black Finish
LLF-8FT5W-PW-BLK




8FT Suspension
Mounting Kit, Black Finish
LLF-8FTAC-CC-BLK




8FT Suspension
Mounting Kit, White Finish
LLF-8FTAC-CC-WHT

DIMENSIONS

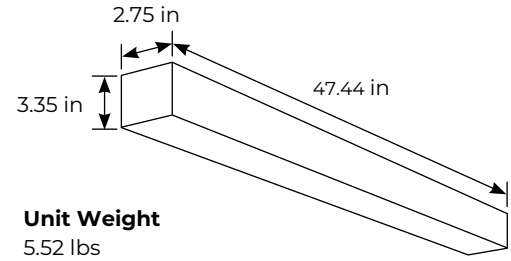

PLOT



NDWR | NuDeco Wrap Series
NIGHTLIGHTR™ | 3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

ETI Lighting’s NuDeco Wrap Lights feature a beautiful, modern design and flexibility for a variety of residential spaces. These decorative wraps are ideal for kitchen islands, entryways, large closets, laundry rooms and more.


- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- **NightLightR™** 2000K Nightlight feature options available
- TRIAC dimming
- Long Life: Rated > 50,000 hours (L70)



CATALOG LOGIC

Series	Width	CRI	CCT	Voltage	Dimming	Finish
NDWR NuDeco Wrap	N (Narrow - 6") W (Wide - 10")	8 80+ CRI	CP3 (3 CCT) 3000K/ 4000K/5000K CP3NL (3 CCT + Nightlight) 3000K/ 4000K/5000K + 2000K Nightlight	SV Single Volt 120V	TD TRIAC Dimming	B Black BN Brushed Nickel

Notes:
1. Wide option available in Black Finish only

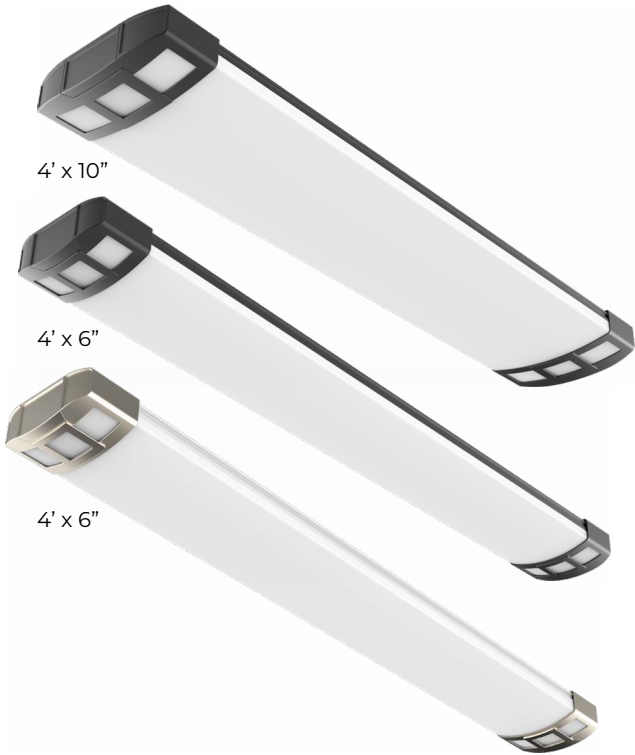

NDWR | NuDeco Wrap Series
NIGHTLIGHTR™ | 3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dimming
NDWR-N-8CP3NL-SV-TD-B	C03030401A	NuDeco Wrap 46"x 6" with Night Light and Black Finish	2	20	244	2000K NL	80+	120V	TRIAC
				60	3601	3000K			
				60	4340	4000K			
				60	3956	5000K			
NDWR-N-8CP3-SV-TD-B	C03031401A	NuDeco Wrap 46"x 6" with Black Finish	2	60	3940	3000K	80+	120V	TRIAC
				60	4700	4000K			
				60	4255	5000K			
NDWR-N-8CP3NL-SV-TD-BN	C03030402A	NuDeco Wrap 46"x 6" with Night Light and Brushed Nickel Finish	2	20	244	2000K NL	80+	120V	TRIAC
				60	3940	3000K			
				60	4700	4000K			
				60	4255	5000K			
NDWR-N-8CP3-SV-TD-BN	C03031402A	NuDeco Wrap 46"x 6" with Brushed Nickel Finish	2	60	3601	3000K	80+	120V	TRIAC
				60	4340	4000K			
				60	3956	5000K			
NDWR-W-8CP3NL-SV-TD-B	C03032401A	NuDeco Wrap 46"x 10" with Night Light and Black Finish	2	18	142	2000K NL	80+	120V	TRIAC
				70	4199	3000K			
				70	5026	4000K			
				70	4610	5000K			
NDWR-W-8CP3-SV-TD-B	C03033401A	NuDeco Wrap 46"x 10" with Black Finish	2	70	4141	3000K	80+	120V	TRIAC
				70	4873	4000K			
				70	4534	5000K			

DIMENSIONS



Decription	L	W	H	weight
46" x 6" Wrap	46.0"	6.2"	2.2"	2.28 lbs.
46" x 6" Wrap w/ Nightlight				3.06 lbs.
46" x 10" Wrap	46.0"	10.2"	2.3"	4.21 lbs.
46" x 10" Wrap w/ Nightlight				4.51 lbs.

PLOT



MOUNTING

Surface and Drywall hardware included.




SWR | Selectable Wrap Series
3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

ETI Lighting's Selectable Commercial Wrap Lights offer flexibility and variety. They are ideal for basements, garages, laundry rooms and more.

- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- TRIAC dimming
- Long Life: Rated > 50,000 hours (L70)

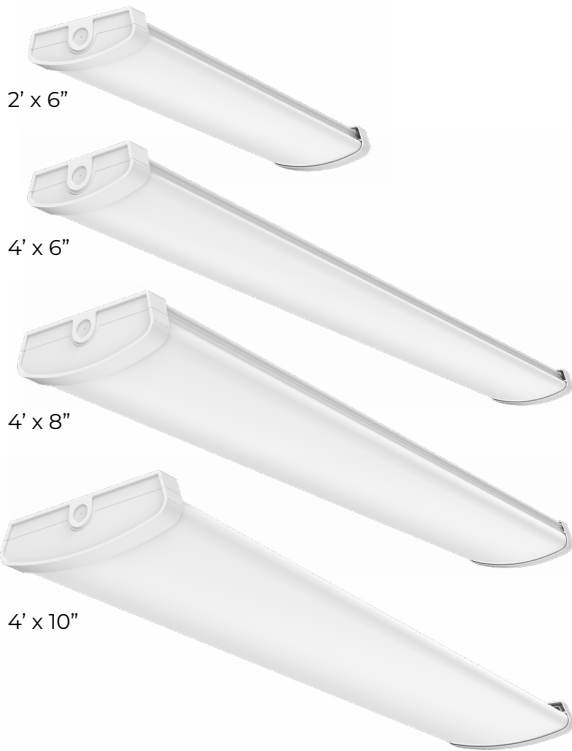

CATALOG LOGIC

Series	Length	Width	CRI	CCT	Voltage	Dimming
SWR Selectable Wrap (Residential)	2 (2') ¹ 4 (4')	N (Narrow - 6") M (Medium 8") W (Wide - 10")	8 80+ CRI	CP3 (3 CCT) 3000K/ 4000K/5000K	SV Single Volt 120V	TD TRIAC Dimming

Notes:
1. 2' is available in N (Narrow - 6" width only).




SWR | Selectable Wrap Series
3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dimming
SWR-2-N-8CP3-SV-TD	C03034401A	Selectable Residential Wrap Narrow Width, 24"x 6"	1	34	2292	3000K	80+	120V	TRIAC
				34	2817	4000K			
				34	2484	5000K			
SWR-4-N-8CP3-SV-TD	C03035401A	Selectable Residential Wrap , Narrow Width, 46"x 6"	1	55	3865	3000K	80+	120V	TRIAC
				55	4737	4000K			
				55	4353	5000K			
SWR-4-M-8CP3-SV-TD	C03036401A	Selectable Residential Wrap, Medium Width, 46"x 8"	1	65	4323	3000K	80+	120V	TRIAC
				65	5215	4000K			
				65	4856	5000K			
SWR-4-W-8CP3-SV-TD	C03037401A	Selectable Residential Wrap, Wide Width, 46"x 10"	1	75	5591	3000K	80+	120V	TRIAC
				75	6510	4000K			
				75	5950	5000K			

DIMENSIONS

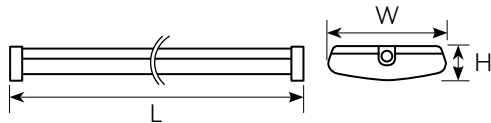


Size	L	W	H	weight
2' x 6"	24.0"	6.0"	2.2"	1.6 lbs.
4' x 6"	46.0"	6.0"	2.2"	2.8 lbs.
4' x 8"	46.0"	8.0"	3.0"	3.6 lbs.
4' x 10"	46.0"	10.0"	3.0"	4.1 lbs.

PLOT



MOUNTING

Surface and Drywall hardware included.

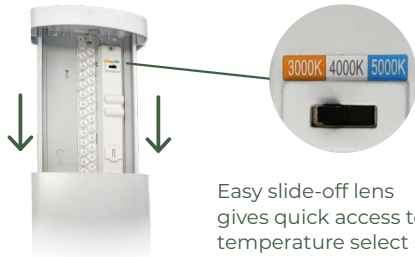

Easy slide-off lens gives quick access to color temperature select switch



SCWR | Selectable Commercial Wrap Series


3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING



KEY FEATURES

ETI Lighting's Selectable Commercial Wrap Lights offer flexibility and variety. They are ideal for various commercial applications, including gyms, locker rooms, garages, and more.

- **Color Preference®** Select from 3 CCTs (3500/4000/5000K)
- **Lumen Boost®** Select from 3 lumen levels
3 Lumen Boost and Power Levels:
2'x6": 1700 | 2425 | 3150 lm
12 | 18 | 23W
4'x6": 3300 | 4800 | 6300 lm
23 | 34 | 45W
4'x10": 4200 | 6150 | 8100 lm
29 | 43 | 57W
- 0-10V dimming
- Long Life: Rated > 150,000 hours (L70)

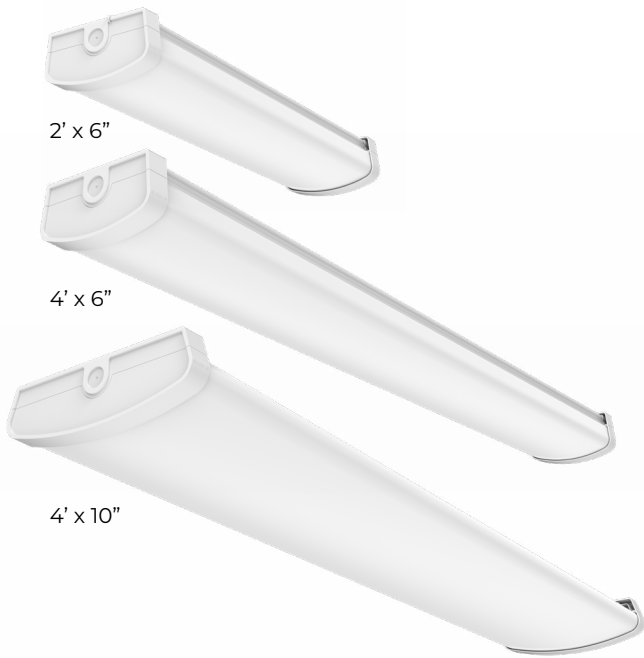

CATALOG LOGIC

Series	Length	Width	Lumens	CRI	CCT	Voltage	Dimming
SCWR Selectable Commercial Wrap	2 (2') ¹ 4 (4')	N (Narrow - 6") W (Wide - 10")	Lumen Pkg. (Nominal/Approx.) LB3 (Lumen Boost)	8 80+ CRI	CP3 (3 CCT) 3500K/ 4000K/5000K	MV Multi-Volt 120-277V	LVD 0-10V Dimming

Notes:
1. 2' is available in N (Narrow - 6" width only).




SCWR | Selectable Commercial Wrap Series

3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING

STOCK ORDERING INFORMATION



Catalog / Part #		Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT (CP4)	CRI	Voltage	Dimming
2' x 6"	SCWR-2-N-LB3-8CP3-MV-LVD	C03038501A	2' x 6" Selectable Commercial Wrap	1	12	1730	3500K	80+	120-277V	0-10V
					17	2366				
					22	3075				
					12	1754	4000K			
					17	2412				
					22	3158				
					12	1743	5000K			
					17	2373				
22	3085									
4' x 6"	SCWR-4-N-LB3-8CP3-MV-LVD	C03039501A	4' x 6" Selectable Commercial Wrap	1	23	3391	3500K	80+	120-277V	0-10V
					34	4768				
					45	6168				
					23	3433	4000K			
					34	4882				
					45	6327				
					23	3413	5000K			
					34	4812				
					45	6158				
					4' x 10"	SCWR-4-W-LB3-8CP3-MV-LVD	C03040501A			
38	5686									
55	7931									
28	4287	4000K								
38	5801									
55	8134									
28	4249	5000K								
38	5731									
55	7923									

DIMENSIONS

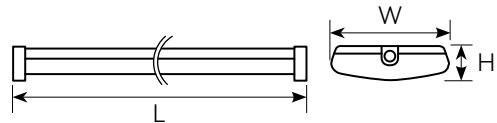

Size	L	W	H	weight
2' x 6"	24.0"	6.0"	3.0"	2.6 lbs.
4' x 6"	46.0"	6.0"	3.0"	4.8 lbs.
4' x 10"	46.0"	10.0"	3.0"	6.5 lbs.

PLOT

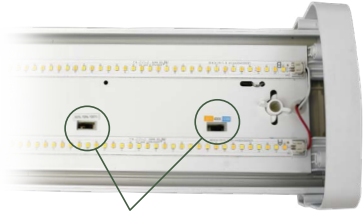

Easy access to CCT & Wattage Select switch underneath lens

MOUNTING

Surface and Drywall hardware included.



WR | 4' Wrap Light

OPTIONS FOR STAIRWELLS | 4000K | 120-277V | 0-10V DIMMING

KEY FEATURES

Applications: rated for stairwells and walkways. Also great for offices, hallways, bathrooms and other commercial uses where flexibility and 0-10V Dimming are needed.

- DLC Listed for stairwells and direct linear ambient
- IC rated for direct contact with insulation
- Mounting bracket, gasket, screws and drywall anchor included
- 0-10V dimming
- Long Life: 230,000 hours (L70)




CATALOG LOGIC

Series	Size	Lumens	CRI / CCT	Voltage	Dimming	OC Sensor
WR Wrap Light	4 (4')	Lumen Pkg. (Nominal/Approx.) 36 3600 lm	840 80+ CRI 4000K	MV Multi-Volt 120-277V	D 0-10V Dimming	OS Integral OC Sensor BLANK No Sensor


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Watt. (Nom.)	Lumen Pkg.	CCT	CRI	Volt.	Dim	DLC Listing
WR-4-36-840-MV-D	54676241	4' Wrap Light, 3600 lm	2	2 x 32W T8	31	3600	4000K	80+	120-277V	0-10V	Direct Linear Ambient ✓
WR-4-36-840-MV-D-OS	54676241-I	4' Wrap Light, 3600 lm w/ Integral OC Sensor	2	2 x 32W T8	31	3600	4000K	80+	120-277V	0-10V	Direct Linear Ambient & Stairwells ✓

DIMENSIONS

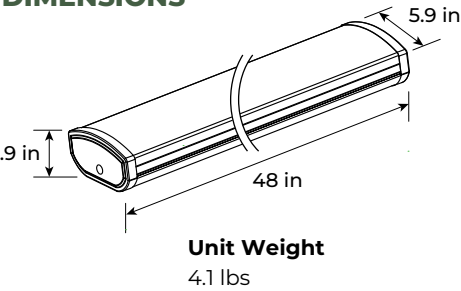

PLOT



ACCESSORIES

Catalog / Part #	Order #	Description
MC601V	90600144	Step Dimming Motion Sensor



* Must be ordered separately and field installed unless ordering one of the OS options listed in the above stock ordering list.

External BBU options also available. See ETISSL.com for details.


WR | 4' Compact Wrap Light

4000K | 120-277V | NON-DIMMABLE

KEY FEATURES

Applications: Great for offices, hallways, bathrooms and other commercial uses where a compact light source is desired.

- 4000K with 80 CRI and wrap diffuser for soft, aesthetic light quality
- IC rated for direct contact with insulation
- Mounting bracket, gasket, screws and drywall anchor included
- Long Life: 4' high lumen rated for 159,000 hours (L70)

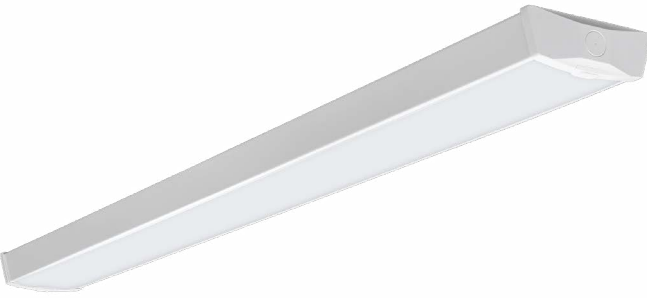

CATALOG LOGIC


Series	Size	Lumens	CRI / CCT	Voltage
WR Wrap Light	4 (4')	Lumen Pkg. (Nominal/Approx.) 36 3600	840 80+ CRI 4000K	MV Multi-Volt 120-277V

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
WR-4-36-840-MV	56513141	4' Compact Wrap Light	6	2 x 32w T8	40	3640	4000K	80+	120-277V	Non-Dim

* External BBU options also available. See ETISSL.com for details.

DIMENSIONS

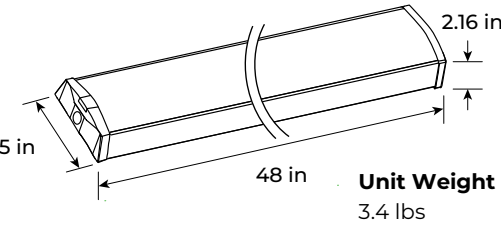

PLOT



WR | 2' & 4' Wrap Light

4000K | 120-277V | 0-10V DIMMING

KEY FEATURES

Applications: Great for offices, hallways, bathrooms and other commercial uses where flexibility and 0-10V Dimming are needed.

- 4000K with 90 CRI and wrap diffuser for soft, aesthetic light quality
- IC rated for direct contact with insulation
- Mounting bracket, gasket, screws and drywall anchor included
- 0-10V dimming
- Long Life: 4' rated for 180,000 hours
2' rated for 178,000 hours



CATALOG LOGIC

Series	Size	Lumens	CRI / CCT	Voltage	Dimming
WR Wrap Light	4FT (4')	Lumen Pkg. (Nominal/Approx.) 5200LM (57W)	940 9-40K 90+ CRI 4000K	MV Multi-Volt 120-277V	LVD D 0-10V Dimming
	2 (2')	20 (20W, 1800 lm)			

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Lumen Pkg.	CCT	CRI	Volt.	Dim
WR-4FT-5200LM-9-40K-MV-LVD	54677441	4' Wrap Light, 5200 lm, Rated life 180,000 hrs.	2	3 x 32W T8	57	5200	4000K	90+	120-277V	0-10V
WR-2-20-940-MV-D	54655441	2' Wrap Light, 1800 lm, Rated life 178,000 hrs.	4	1 x 32W T8	20	1800				

ACCESSORIES

Catalog / Part #	Order #	Description
MC601V	90600144	Step Dimming Motion Sensor


 * Must be ordered separately and field installed.
External BBU options also available. See ETISSL.com for details.

DIMENSIONS

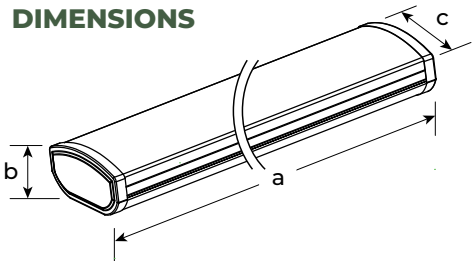

Model	a	b	c	weight (lbs)
2' 1800 lm	23.6"	2.9"	5.9"	2.9
4' 5200 lm	48"	3.1"	10"	6.4

PLOT



WR | 4' ECO Wrap Light with OC Sensor

4000K | 120-277V | NON-DIMMABLE

KEY FEATURES

Applications: Great for low bays, storage areas, laundry rooms and other uses where a compact light source is desired. Motion sensor adjusts to desired hold times (2 min or 10 min).



- Great for tight spaces—5" width and 2.17" profile height
- Integrated motion sensor with 3 hold times: 2 min, 10 min, disable (Control using switch on luminaire)
- Detects Motion up to 13 ft. away at of 10' ft. mounting height. Maximum sensing angle: 110°
- IC rated for direct contact with insulation
- Long Life: Rated up to 171,000 hours (L70)




STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
WR-4FT-3600LM-8-40K-MV-N	56513242	4' ECO Wrap Light w/ OC Sensor	2	40W	3705	4000K	80+	120-277V	Non-Dim

OC SENSOR

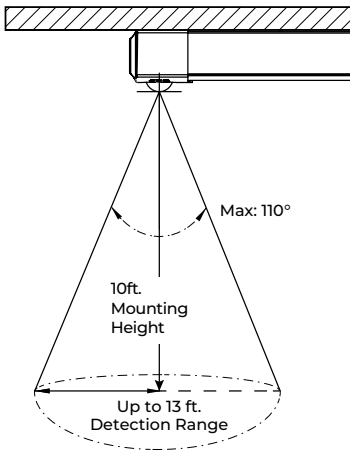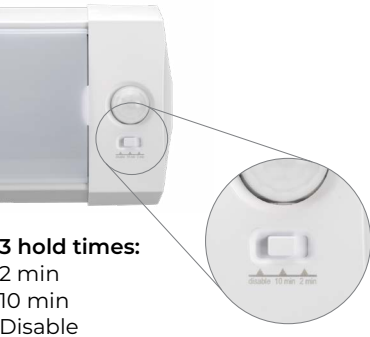


DIMENSIONS

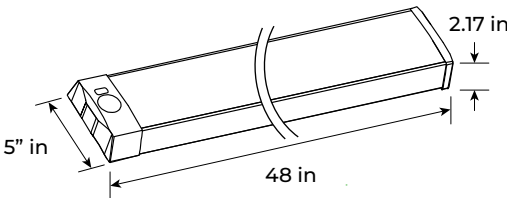

Unit Weight
3.53 lbs

PLOT



CS | 18" Closet Wrap Light with Pull Chain

4000K | 120V | NON-DIMMABLE

KEY FEATURES

Applications: Ideal for applications including multifamily, residential, offices, closets, pantries, small utility areas and more.

- Installed profile height of 0.9"
- Removable center face panel for easier wiring
- TRIAC Dimmable
- Designed for use in closets
- Long Life: Rated up to 172,000 hours (L70)



CATALOG LOGIC


Series	Size	Lumens	CRI / CCT	Voltage
CS Closet Light	18 18"	Lumen Pkg. (Nominal/Approx.) 12 1200 lm	840 80+ CRI 4000K	SV Single Volt 120V

STOCK ORDERING INFORMATION



Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
CS-18-12-840-SV	53603142	18" Closet Light with Pull Chain	2	1 x 32w T8	16	1478	4000K	80+	120V	Non-Dim



DIMENSIONS

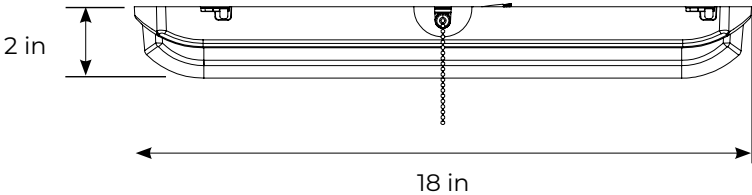

PLOT



VRST | VersaStrip Lights

4000K | 120-277V | 0-10V DIMMING

KEY FEATURES

ETI's VersaStrip Lights are powerful, energy-efficient 4' strip lights that come in 1-pack and 2-pack with continuous linking bracket. They are ideal for commercial garages, manufacturing facilities, retail spaces and more.

- Surface Mount Hardware included
- Link up to 8 single 4' units
- 0-10V Dimming
- Rated Life (L70) 140,000 Hours




8-FT Models
include (2) 4-FT Fixtures
with Continuous Linking Bracket

CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming
VRST VersaStrip Light	4 (1 - 4FT) 8 (2 - 4FT)	8 80+ CRI	40 4000K 50 5000K	MV Multi-Volt 120-277V	LVD 0-10V Dimming


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dim
VRST-4-840-MV-LVD	B01078601A	4' VersaStrip 4000K	45	5951	4000K	80+	120-277V	0-10V
VRST-4-850-MV-LVD	B01078801A	4' VersaStrip 5000K	45	5934	4000K	80+	120-277V	0-10V
VRST-8-850-MV-LVD	B01079801A	(2) 4' VersaStrip 5000K with linking bracket	92	11796	4000K	80+	120-277V	0-10V

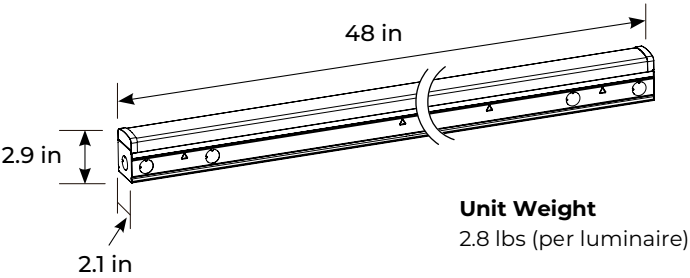

Unit Weight
2.8 lbs (per luminaire)

PLOT



MOUNTING

Surface Mount
hardware included.



ECOST | ECO Strip Light

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Each luminaire is equipped with easy end-to-end connection features. Applications: under cabinets, pantry, desk hutch, kitchen desk, closet, work bench, tool bench or storage room.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- Suspension Kit, 5-ft. power cord with on/off switch included
- End-to-end connector included for linking multiple fixtures
- TRIAC dimming down to 10%
- Rated Life (L70) 171,000 Hours



CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming
ECOST Economical Strip Light	4FT 2FT	Lumen Pkg. (Nominal/Approx.) 2000LM 1000LM	8 80+ CRI	3CP 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC Dimming

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
ECOST-4FT-2000LM-8-3CP-SV-TD	556091110	4' Strip Light	4	17	1983 – 2101	3000K 4000K 5000K	80+	120V	TRIAC
ECOST-2FT-1000LM-8-3CP-SV-TD	556081110	2' Strip Light	6	8.5	1100 – 1174				

ACCESSORIES (Order Separately, Field Install)


Order #	Description
54657102	4" J-Box Surface Mounting Plate and Screws



PLOT



DIMENSIONS

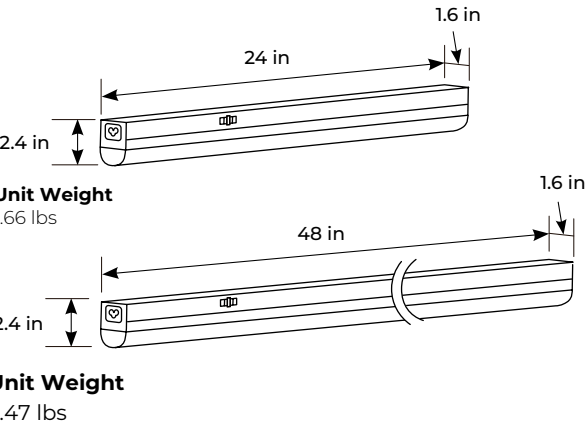


ST | 4' High Lumen Output Strip Light

WITH BUILT-IN BBU | 5000K | 120-277V | 0-10V DIMMING

KEY FEATURES

ETI 4 ft. Linkable LED Strip Light with hardwire connection. Total 38W (33W Strip Light/5W BBU), 4900 Lumen, 5000K. The 4 ft. Strip includes aircraft cables for easy suspended mounting. Ideal for tight spaces and for task lighting.

- Hard-Wire cord, aircraft cables for easy suspension mounting, wire nuts and mounting screws included
- 0-10V Dimming
- Long Life: Rated up to > 50,000 hours (L70)

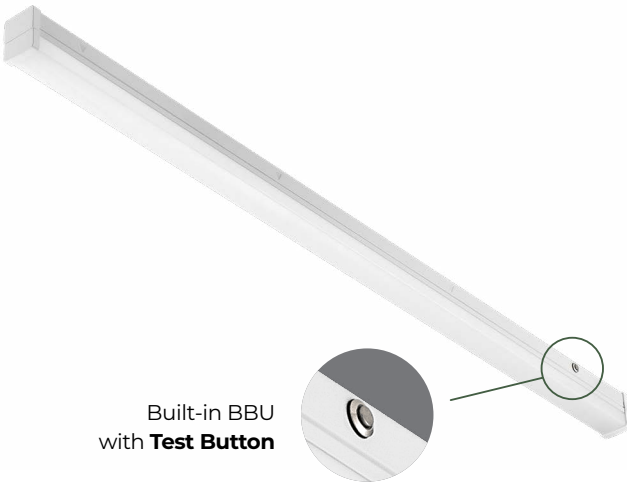


CATALOG LOGIC


Series	Size	Lumens	CCT	Voltage	Dimming	BBU
ST Strip Light	4FT	Lumen Pkg. (Nominal/Approx.) 4900LM	50K 5000K	MV Multi-Volt 120-277V	LVD 0-10V Dimming	EM Built-in Battery Backup

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
ST-4FT-4900LM-50K-MV-LVD-EM	556101620	4' High Lumen Output Strip Light with build in Battery Back-up	6	33 (luminaire) 5 (BBU)	4900	5000K	80+	120-277V	0-10V Dim

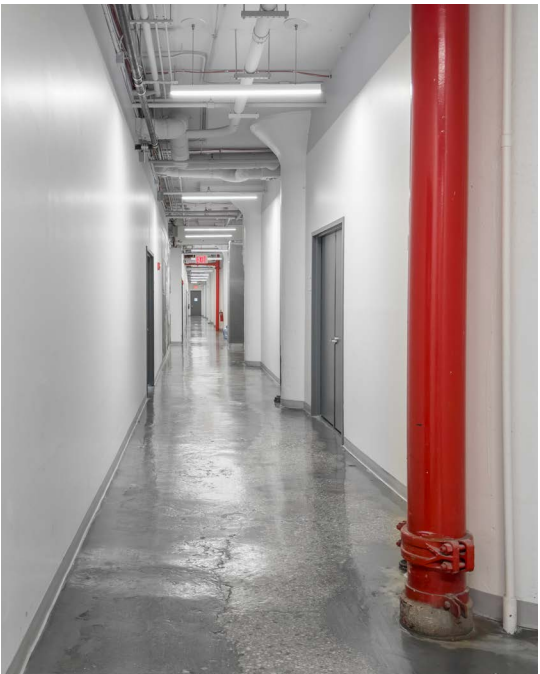

DIMENSIONS

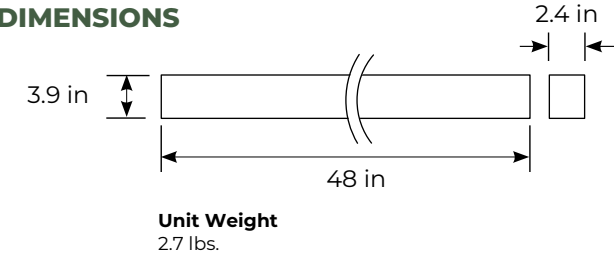

PLOT



ST | Strip Lights – Direct Wire

4000K | 120-277V | 0-10V DIMMING

KEY FEATURES

ETI 4 ft. Linkable LED Strip Light with hardwire connection. The 4 ft. Strip includes aircraft cables for easy suspended mounting. Ideal for tight spaces and for task lighting.

- Non-yellowing PC lens material provides high light transmittance
- 0-10V Dimming
- Long Life: Rated up to > 60,000 hours (L70)
- Field installed accessories available: BBU or External OC Sensor with Daylight Sensor*
**Cannot be installed together*



Optional **OC / Daylight Sensor** Available



CATALOG LOGIC

Series	Size	Lumens	CRI / CCT	Voltage	Dimming
ST Strip Light	4 (4 ft.)	Lumen Pkg. (Nominal/Approx.) 40 (4000 lm)	840 80+ CRI 4000K	MV Multi-Volt 120-277V	LVD 0-10V Dimming
	2 (2 ft.)	20 (2000 lm)			


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
ST-4-40-840-MV-LVD	54283144	4' Direct Wire Strip Light	4	34	4169	4000K	80+	120-277V	0-10V Dim
ST-2-20-840-MV-LVD	54260144	2' Direct Wire Strip Light	6	17	2163				


ACCESSORIES (Order Separately, Field Install)

Order #	Description
90600121	Multi-Volt Occupancy Sensor with daylight sensor, (External)
95457326101	Aircraft Cables for Suspending Mounting (Two 10' pieces)
54657102	4" J-Box Surface Mounting Plate and Screws

PLOT



DIMENSIONS

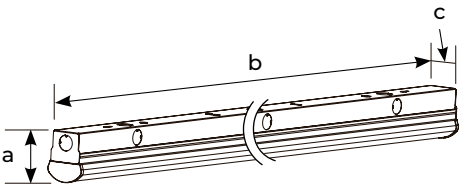

Model	a	b	c	weight (lbs)
4 ft.	2.7"	48"	2.2"	2.6
2 ft.	2.7"	24"	2.2"	1.4

* External BBU or OC sensor accessory also available. BBU and OC Sensor cannot be used together. See ETISSL.com for details.

SHOP LIGHTS



SH | 36" LED Shop Light with Pull Chain

4000K | 120V | NON-DIMMABLE

KEY FEATURES

ETI Lighting's 36" LED Plug-in Shop Light is slim and powerful and has a convenient 19.8" pull chain with easy-to-grab ETI finial. This nonlinkable fixture is ideal for garages, workshops, tool shops, basements, craft rooms and more.

- Lightweight, sturdy, and easy to install
- Diffused lens with soft light quality
- Pull-chain for easy grab
- Non-Dimmable
- Rated Life (L70) > 50,000 Hours




CATALOG LOGIC


Series	Size	CRI	CCT	Voltage
SH Shop Light with Pull Chain	36 (36")	8 80+ CRI	40K 4000K	SV Single-Volt 120V

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dim
SH-36-840K-SV	B02011601A	36" LED Shop Light with Pull Chain	6	22	2347	4000K	80+	120V	Non-Dim

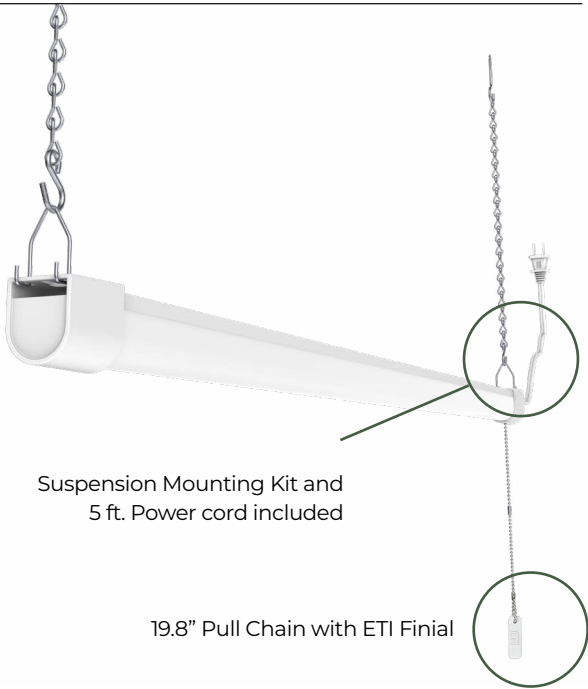


DIMENSIONS

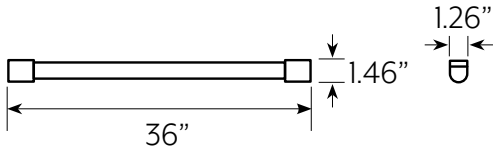

Unit Weight
1.94 lbs

PLOT



Easy Installation
Includes Dry Wall
& Hanging
Mounting Kits Plus
attached 5' Cord



SH | 42" Shop Lights with Pull Chain

4000K | 120V | NON-DIMMABLE

KEY FEATURES

ETI Lighting's 42" Shop Lights are powerful, convenient plug-in, linkable lights with standard and high output options. They have a convenient 19.8" pull chain with easy-to-grab ETI finial and are ideal for garages, workshops, and more.

- Standard and High Output options
- Diffused lens with soft light quality
- Pull-chain for easy grab
- Non-Dimmable
- Rated Life (L70) > 50,000 Hours




CATALOG LOGIC


Series	Size	CRI	CCT	Voltage
SH Shop Light with Pull Chain	42 (42") 42 (42" High Output)	8 80+ CRI	40K 4000K	SV Single-Volt 120V

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dim
SH-42-840K-SV	B02012601A	42" LED Shop Light Standard Output	4	42	4236	4000K	80+	120V	Non-Dim
SH-42HO-840K-SV	B02013601A	42" LED Shop Light High Output	4	65	6279	4000K	80+	120V	Non-Dim

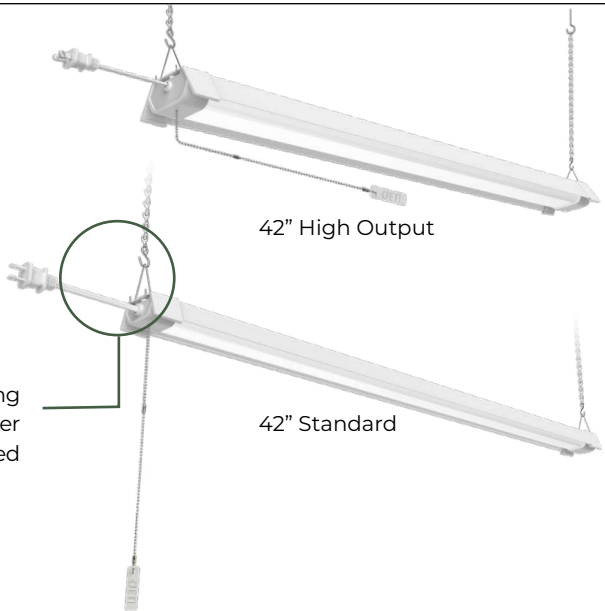


DIMENSIONS

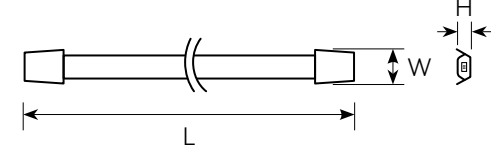

Model	L	W	H	weight (lbs)
42" with Standard Output	42.1"	2.6"	1.2"	1.08
42" with High Output	42.1"	4.6"	1.8"	1.54

PLOT



Easy Installation
Includes Dry Wall
& Hanging
Mounting Kits Plus
attached 5' Cord



AN | Anoma Shop Lights with Pull Chain

4000K | 120V | NON-DIMMABLE

KEY FEATURES

ETI's Anoma Series 46" Shop Lights are powerful, linkable plug-in lights with standard and high output options. These integrated LED lights offer 3 power levels via pull chain and are ideal for garages, workshops, and more.

- Metal Housing with Diamond Plate Texture and Black End Caps
- Frosted lens for reduced glare
- Pull-chain for easy grab
- Non-Dimmable
- Rated Life (L70) > 50,000 Hours
- Switch Between 3 Power Levels Via Pull Chain

Standard Output: 4100 | 5800 | 7500 lm
20 | 60 | 80W

High Output: 7200 | 10600 | 13600 lm
67 | 100 | 133W



CATALOG LOGIC


Series	Size	CRI	CCT	Voltage
ANSH Anoma Shop Light	46 (46") 46HO (46" High Output)	8 80+ CRI	40K 4000K	SV Single-Volt 120V

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dim
ANSH-46-840K-SV	B02014601A	Anoma 46" LED Shop Light Standard Output	4	40/60/80	4150/5968/7577	4000K	80+	120V	Non-Dim
ANSH-46HO-840K-SV	B02015601A	Anoma 46" LED Shop Light High Output	4	65/100/130	7267/10663/13681	4000K	80+	120V	Non-Dim




DIMENSIONS



Model	L	W	H	weight (lbs)
Standard Output	46.0"	4.5"	1.7"	1.08
High Output	46.0"	6.1"	1.7"	1.54

PLOT



Easy Installation
Includes Dry Wall & Hanging Mounting Kits Plus attached 5' Cord



SH | 42" Bluetooth Shop Light

4000K | 120V | NON-DIMMABLE

KEY FEATURES

ETI's Bluetooth Shop Light with Bluetooth speakers, wirelessly connects to your smart phone or tablet to play your music or podcasts. With high lumen output, it's ideal for residential garages, workshops, or small business spaces where individual task lighting with speaker is desired.

- Integrated high-quality Bluetooth Speakers, (use 10W of energy)
- Clear lens with optic design to reduce glare
- Activates audio from up to 33 ft. away
- Pull-chain for easy grab
- Non-Dimmable
- Rated Life (L70) 169,000 Hours




CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Feature
SH Shop Light with Pull Chain	42IN	Lumen Pkg. (Nominal/Approx.) 3600LM	8 80+ CRI	40K 4000K	SV Single-Volt 120V	BT Bluetooth Speaker



STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dim
SH-42IN-3600LM-8-40K-SV-BT	55703142	42" Bluetooth Shop Light	2	Total 50W	3713	4000K	80+	120V	Non-Dim
				Luminaire 40W					
				Speakers 10W					

DIMENSIONS

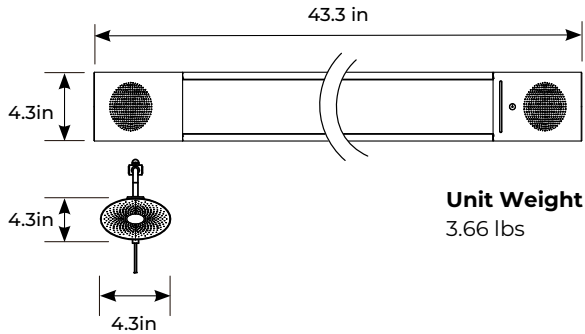

PLOT

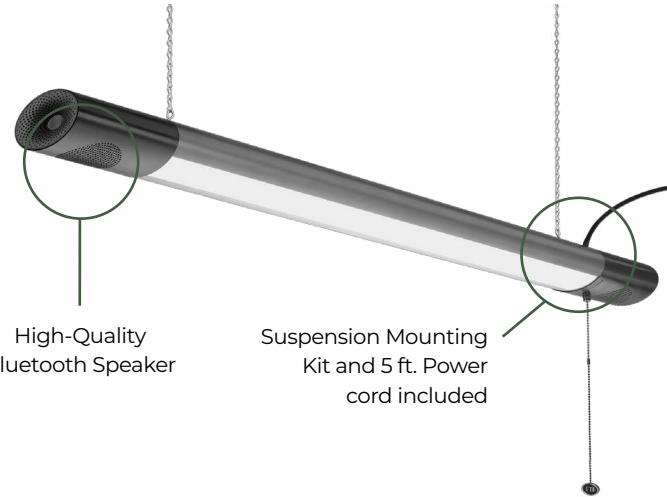



SH | 4' Linkable Shop Light

4000K | 120V | NON-DIMMABLE

KEY FEATURES

- ETI's 4' Linkable Shop Lights are linkable up to nine 4ft. units. Ideal for garages, basements, workshops, storage rooms, utility rooms, craft rooms and more.
- Fixture mounting chain length is 2ft (24in) each
 - 19in. Pull Chain for an easy grab
 - Non-Dimmable
 - Rated Life (L70) > 50,000 Hours



End-to-End Connector & Linking Cord Included



Suspension Mounting Kit and 5 ft. Power cord included



CATALOG LOGIC


Series	Size	Wattage	CRI / CCT	Voltage
SH Shop Light with Pull Chain	4 4'	35 35W 3200 lm pkg.	840 80+ CRI 4000K	SV Single-Volt 120V

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Lumen Pkg. (Nominal/Approx.)	CCT	CRI	Voltage	Dim
SH-4-35-840-SV	54103162	4' Linkable Shop Light	4	35	3200	4000K	80+	120V	Non-Dim



DIMENSIONS

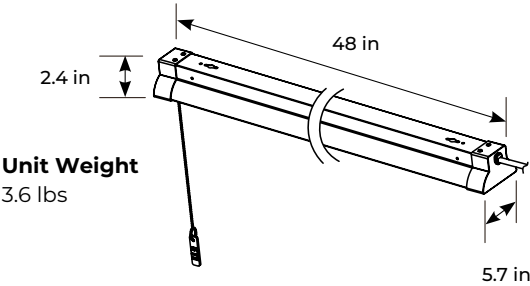

PLOT



SH | 40" Slim Shop Light with Motion Sensor



4000K | 120V | NON-DIMMABLE

KEY FEATURES

- ETI 40 in. Slim LED Shop Light with Motion Sensor offers motion sensing up to 13' and comes with hold times of 2 or 5 minutes or disable mode. Ideal for garages, basements, workshops, storage rooms, utility rooms, craft rooms or any where that hands-free lighting is wanted.
- Detects motion up to 13 feet away at 10 ft. mounting height
 - Adjustable Hold Time: Disable / 10 Minutes / 2 Minutes
 - Metal housing with black ends
 - Non-Dimmable
 - Rated Life (L70) > 50,000 Hours



End-to-End Connector & Linking Cord Included

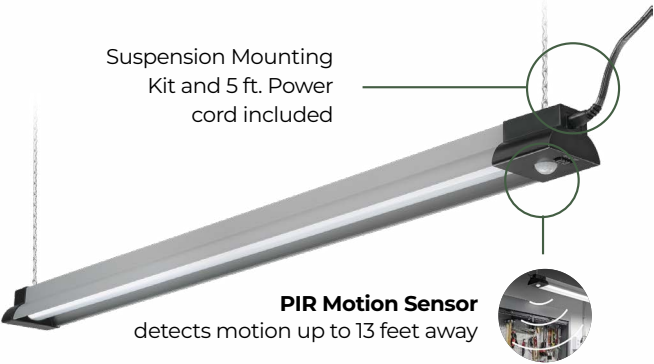


CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage
SH Shop Light with Pull Chain	40 40"	Lumen Pkg. (Nominal/Approx.) 3000LM	8 80+ CRI	40K 4000K	SV Single-Volt 120V

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dim
SH-40IN-3000LM-8-40K-SV-OS	55701142	40" Slim Shop Light with Motion Sensor	4	40	3166	4000K	80+	120V	Non-Dim

DIMENSIONS

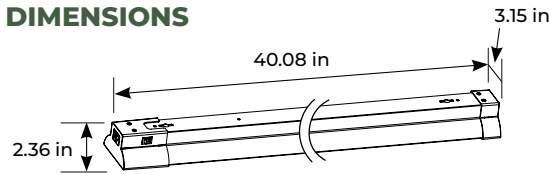

Unit Weight
2.52 lbs


PLOT



UNDER CABINET LIGHTS




NXUC | Under Cabinet Lights
3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

ETI Lighting's Nexus Under Cabinet Lights with adaptable Clip Fit Mounting Clips for wall or surface mount. Great for residential counter areas, kitchens, laundry rooms, and more. Also can be used for indirect light on top of cabinets.

- **Color Preference®** Select from 5 CCTs (3000/3500/4000/5000K)
- TRIAC dimming
- Rated Life (L70) > 50,000 Hours
- Switch between 100% / 50% Power
 - 12"**: 6/3W | 500/200lm
 - 18"**: 11/5.5W | 750/500lm
 - 24"**: 14/7W | 1000/700lm

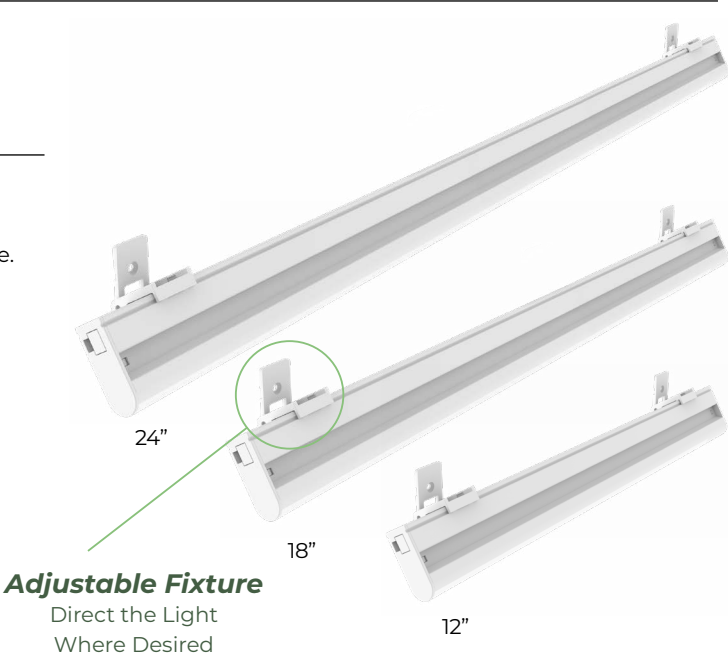


CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming
NXUC Nexus Under Cabinet Light	12 (12") 18 (18") 24 (24")	8 80+ CRI	CP5 2700/3000/3500/ 4000/5000K	SV Single-Volt 120V	TD TRIAC

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage Level	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
NXUC-12-8CP5-SV-TD	B04015301A	12" Nexus Under Cabinet Light	5	High	6	532 – 586	2700K 3000K 3500K 4000K 5000K	80+	120V	TRIAC
				Low	3	230 – 259				
NXUC-18-8CP5-SV-TD	B04016301A	18" Nexus Under Cabinet Light	5	High	11	1155 – 1291				
				Low	5.5	520 – 567				
NXUC-24-8CP5-SV-TD	B04018301A	24" Nexus Under Cabinet Light	5	High	14	1316 – 1512				
				Low	7	760 – 819				

DIMENSIONS

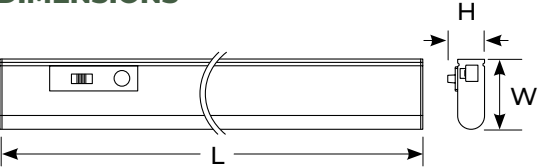


Size	L	W	H	weight (lb)	Maximum Linked Units
12 in.	12.0"	2.0"	1.1"	0.25	26
18 in.	18.0"	2.0"	1.1"	0.33	17
24 in.	24.0"	2.0"	1.1"	0.4	14

PLOT



Cycle between
On at 100% Brightness/
Off / On at 50% Brightness

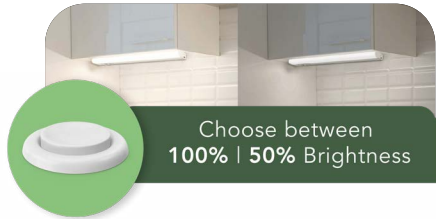


NXAUC | Nexus Adjustable Under Cabinet Lights
NIGHTLIGHTR™ | 5 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

ETI Lighting's Nexus Adjustable Under Cabinet Lights have an adjustable lens with 55° tilt to direct light where desired. These integrated LED lights are available in two models: with adjustable brightness or with NightLightR™/ OneTouch. They are 80+CRI and last 50,000 hour. Great for residential counter areas, kitchens, laundry rooms, and more.

- Adjustable Lens with 55° Tilt
- OneTouch:** Control all linked fixtures with the press of a button.
- Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- NightLightR™** 2000K Nightlight feature options available
- TRIAC dimming
- Long Life: Rated > 50,000 hours (L70)

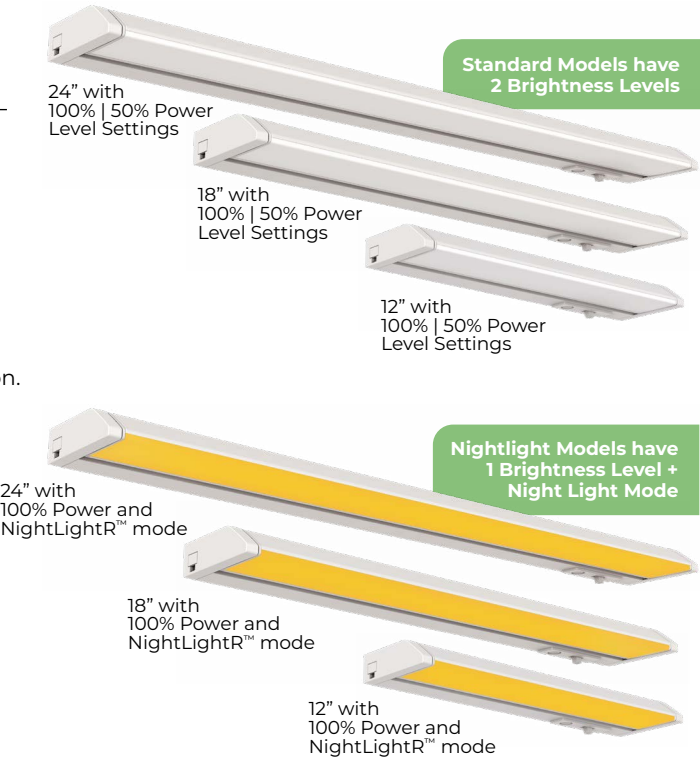


CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming
NXAUC Nexus Adjustable Under Cabinet Lightst	12 (12")	8 80+ CRI	CP5 2700/3000/3500/4000/5000K	SV Single-Volt 120V	TD TRIAC
	18 (18")		CP5NL 2700/3000/3500/4000/5000K with 2000K Night Light		
	24 (24")				

Direct Light Where Desired



Choose Between Two Models with Customized Functions

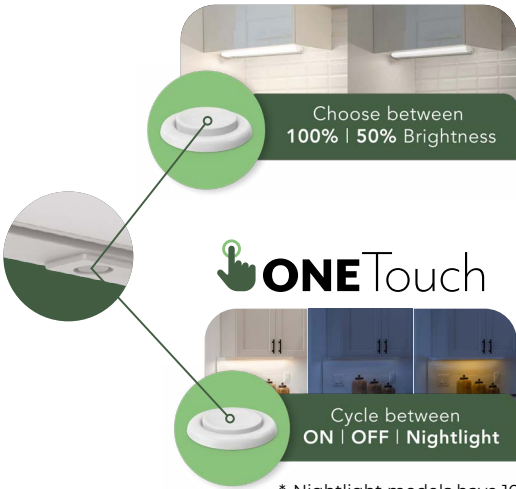

Non-Nightlight Models:
On/Off & Brightness Control Button.
Cycle between:
On at 100% Brightness / Off /
On at 50% Brightness

Nightlight Models:
Press OneTouch button
On/Off/On to change
from 100% White Light
to Nightlight Mode


* Nightlight models have 100% power level only for white light mode.

NXAUC | Nexus Adjustable Under Cabinet Lights
NIGHTLIGHTR™ | 5 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage Level	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
NXAUC-12-8CP5-SV-TD	B04021301A	12" Nexus Adjustable with 100% 50% Power Level Settings	5	High	6	454 – 520	2700K 3000K 3500K 4000K 5000K	80+	120V	TRIAC
				Low	3	185 – 222				
NXAUC-18-8CP5-SV-TD	B04022301A	18" Nexus Adjustable with 100% 50% Power Level Settings	5	High	11	1003 – 1144				
				Low	5.5	460 – 505				
NXAUC-24-8CP5-SV-TD	B04024301A	24" Nexus Adjustable with 100% 50% Power Level Settings	5	High	13	1003 – 1144				
				Low	6.5	460 – 505				
NXAUC-12-8CP5NL-SV-TD	B04020301A	12" Nexus Adjustable with 100% Power Level plus NightLightR™ mode / OneTouch	5	High	6	454 – 520	2700K 3000K 3500K 4000K 5000K	80+	120V	TRIAC
				Night Light	3	185 – 222				
NXAUC-18-8CP5NL-SV-TD	B04023301A	18" Nexus Adjustable 100% Power Level plus NightLightR™ mode / OneTouch	5	High	11	1003 – 1144				
				Night Light	5.5	460 – 505				
NXAUC-24-8CP5NL-SV-TD	B04025301A	24" Nexus Adjustable 100% Power Level plus NightLightR™ mode / OneTouch	5	High	13	1003 – 1144				
				Night Light	6.5	460 – 505				

DIMENSIONS

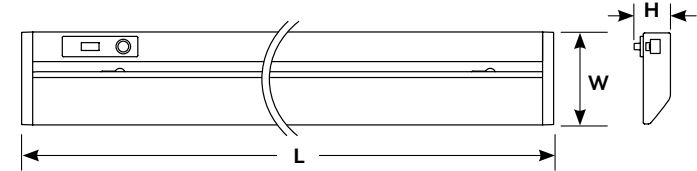

Size	L	W	H	weight (lb)	Maximum Linked Units
12 in.	12.0"	3.1"	1.3"	0.35	26
18 in.	18.0"	3.1"	1.3"	0.50	17
24 in.	24.0"	3.1"	1.3"	0.65	14

INCLUDED IN PACKAGE

- Fixture
- Mounting Hardware
- Linking Cable
- Power Cord





ETI Under Cabinet
Lights also Work as
Upper Cabinet Indirect
Lighting Solution

UC | 40" Linkable Magnetic Shelf & Under Cabinet Light
5000K | 120V | NON-DIMMABLE

KEY FEATURES

ETI's 40" Linkable Magnetic Shelf & Under Cabinet Light is sleek and modern with an installed profile height of 0.6". This fixture is ideally suited for under cabinets and shelves and easily blends into the environment.

- Minimizes cord clutter by linking together and using one switch to control
- Link up to 10 fixtures
- Screw mount for wooden shelves, magnet mount for metal shelves
- Non-Dimmable
- Rated Life (L70) 171,000 Hours

3 High Strength Magnets
for mounting to metal surfaces



Link up to 10 Fixtures
Linking Cord Included

CATALOG LOGIC


Series	Size	Lumens	CRI	CCT	Voltage
UC Linkable Magnetic Under Cabinet Light	40IN	Lumen Pkg. (Nominal/Approx.) 1000LM	9 90+ CRI	50K 5000K	SV Single-Volt 120V

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dim
UC-40IN-1000LM-9-50K-SV	535091610	40" Linkable Magnetic Shelf & Under Cabinet Light	6	13	1050	5000K	90+	120V	Non-Dim



DIMENSIONS

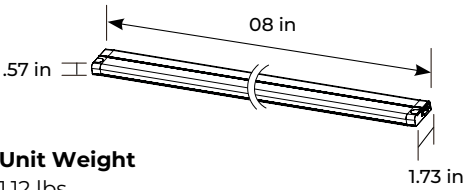

UC | Linkable, Beam-Adjustable Under Cabinet Lights

120V | Triac Dim-to-Warm from 3000K to 2200K



KEY FEATURES

ETI's Linkable, Beam Adjustable Under Cabinet Light with TRIAC Dim-to-Warm is beam adjustable with two light output options, linkable, and has plug-in or direct-wire power connection. Ideal for kitchen counter tops, cooking areas, under desk hutches, workstations, cabinet units or shelving, and more.

- **Dim2Warm:** Transitions from 3000K to 2200K when dimmed
- **Magna Mount System included** with easy-to-install magnetic mounting plate
- Link up to 40 fixtures
- Plug-in or direct wire connection
- Rated Life (L70) > 50,000 Hours



Direct Link and Cable Link Included




CATALOG LOGIC

Series	Size	Watts or Lumens	CRI / CCT	Voltage	Dimming
UC Linkable Magnetic Under Cabinet Light	12 (12")	Lumen Pkg. (Nominal/Approx.)	930 90+ CRI 3000K	SV Single-Volt 120V	D TRIAC Dim-to-Warm
	18 (18")	5 (5.5W)			
	24 (24")	9 (9W)			
	32 (32")	12 (12.5W)			
	42 (42")	10 (1000 lm) 15 (1500 lm)			

Dim2Warm

Color temperature becomes warmer as light dims, transitioning from 3000K to 2200K.

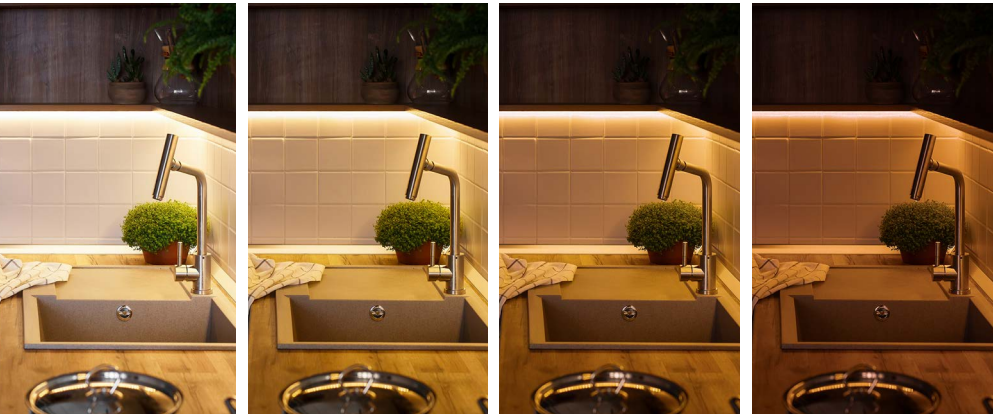

UC | Linkable, Beam-Adjustable Under Cabinet Lights

120V | Triac Dim-to-Warm from 3000K to 2200K


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dim
UC-12-5-930-SV-D	53502111	12" Linkable, Beam-Adjustable Under Cabinet Lights	5	5.5	336	3000K – 2200K	90+	120V	TRIAC Dim-to-Warm
UC-18-9-930-SV-D	53503111	18" Linkable, Beam-Adjustable Under Cabinet Lights	5	9	563				
UC-24-12-930-SV-D	53504111	24" Linkable, Beam-Adjustable Under Cabinet Lights	5	12.5	777				
UC-32-10-930-SV-D	53505111	32" Linkable, Beam-Adjustable Under Cabinet Lights	5	15	1246				
UC-42-15-930-SV-D	53506111	42" Linkable, Beam-Adjustable Under Cabinet Lights	5	22	1925				

MOUNTING




DIMENSIONS

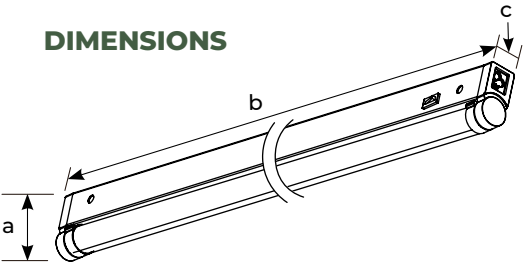

Model	a	b	c	weight (lbs)	Maximum Linked Units
12 in.	2.4"	12"	1.1"	1.1	40
18 in.	2.4"	17.9"	1.1"	1.4	30
24 in.	2.4"	23.9"	1.1"	1.7	25
32 in.	3.9"	32	2.4"	2.1	18
42 in.	3.9"	42	2.4"	2.6	14



DOWNLIGHTS

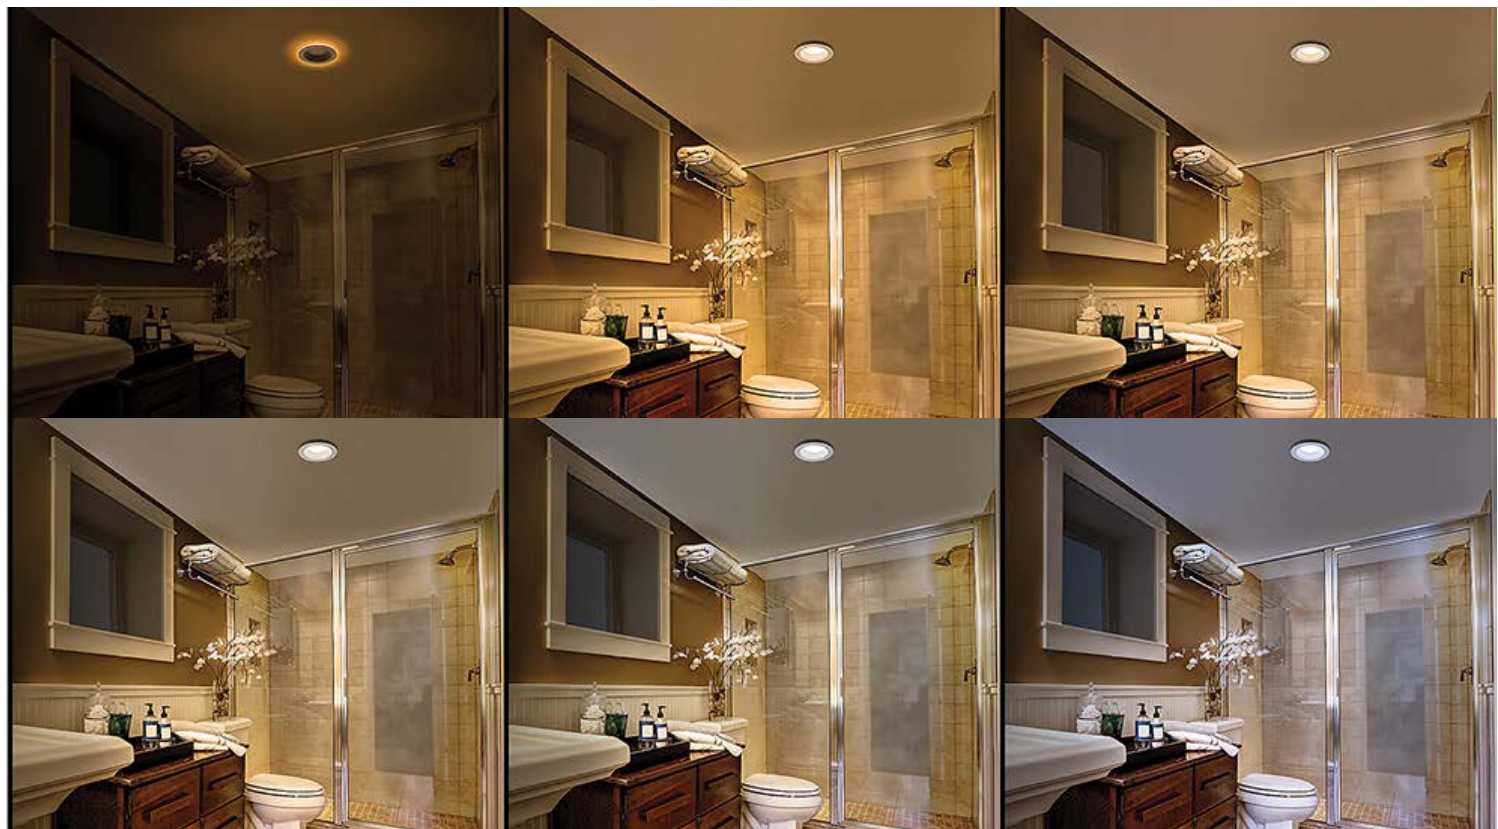




Commercial 120-277V
0-10V Dimming

COMMERCIAL DOWNLIGHTS



CCDL | Capella Commercial Downlights

3 LUMEN BOOST® | 4 CCT COLOR PREFERENCE® | 120-277V



KEY FEATURES

ETI Lighting's Capella Commercial Downlights have a deep recessed look with soft, diffused light quality for visual comfort and minimized glare.

These efficient commercial downlights have a classic feel, and feature a 90+ CRI, and a wet-location rating. Ideal for new construction projects (can also be used for retrofits) in multifamily, retail, restaurants, hospitality, offices, and more.

- **Color Preference®** Select from 4 CCTs (3000/3500/4000/5000K)
- **Lumen Boost®** Select from 3 lumen levels
- 0-10V dimming
- Rated Life (L70) > 100,000 Hours
- Wet location Rated



Series	Size	Lumens	CRI	CCT	Voltage	Dimming
CCDL Capella Commercial Downlights		LB3 3 Lumen Boost®	9 90+ CRI	CP4 3000K 3500K 4000K 5000K	MV Multi-Volt 120-277V	LVD 0-10V Dimming
	4 (4")	600 800 1000 lm 7 9 12W				
	6 (6")	1100 1500 2000 lm 17 18 24W				
	8 (8")	2400 2800 3300 lm 25 28 24W				
	04 (10")	3000 3500 4000 lm 32 37 43W				
Lumen Values are Nominal/Approximate						



CCDL | Capella Commercial Downlights

3 LUMEN BOOST® | 4 CCT COLOR PREFERENCE® | 120-277V


STOCK ORDERING INFORMATION

	Catalog / Part #	Order #	Description	Case QTY	CRI	CCT (CP4)	Wattage (Nominal)	Lumen Package	Delivered Lumens	LPW	VOLTAGE	DIM
4"	CCDL-4-LB3-9CP4-MV-LVD	63314101	4" Capella Commercial Downlight	4	90+	3000K	12	1000	1063	95	120-277V	0-10V
							9	800	871	97		
							7	600	654	95		
						3500K	12	1000	1110	101		
							9	800	901	101		
							7	600	671	99		
						4000K	12	1000	1115	102		
							9	800	903	103		
							7	600	672	100		
						5000K	12	1000	1078	97		
							9	800	881	98		
							7	600	660	97		
6"	CCDL-6-LB3-9CP4-MV-LVD	63315101	6" Capella Commercial Downlight	4	90+	3000K	24	2000	2078	89	120-277V	0-10V
							18	1500	1628	94		
							14	1100	1206	97		
						3500K	24	2000	2172	94		
							18	1500	1685	98		
							14	1100	1237	100		
						4000K	24	2000	2184	95		
							18	1500	1693	99		
							14	1100	1242	101		
						5000K	24	2000	2099	91		
							18	1500	1648	96		
							14	1100	1223	99		
8"	CCDL-8-LB3-9CP4-MV-LVD	63316101	8" Capella Commercial Downlight	4	90+	3000K	35	3300	3398	98	120-277V	0-10V
							29	2800	2900	100		
							25	2400	2479	99		
						3500K	35	3300	3616	105		
							29	2800	3074	107		
							25	2400	2595	105		
						4000K	35	3300	3650	107		
							29	2800	3107	109		
							25	2400	2617	106		
						5000K	35	3300	3502	102		
							29	2800	3014	105		
							25	2400	2560	104		
10"	CCDL-10-LB3-9CP4-MV-LVD	63317101	10" Capella Commercial Downlight	4	90+	3000K	43	4000	4074	98	120-277V	0-10V
							37	3500	3554	101		
							32	3000	3071	104		
						3500K	43	4000	4334	106		
							37	3500	3754	107		
							32	3000	3222	109		
						4000K	43	4000	4388	107		
							37	3500	3796	109		
							32	3000	3257	110		
						5000K	43	4000	4224	102		
							37	3500	3694	104		
							32	3000	3198	107		

CCDL | Capella Commercial Downlights

3 LUMEN BOOST® | 4 CCT COLOR PREFERENCE® | 120-277V

DIMENSIONS

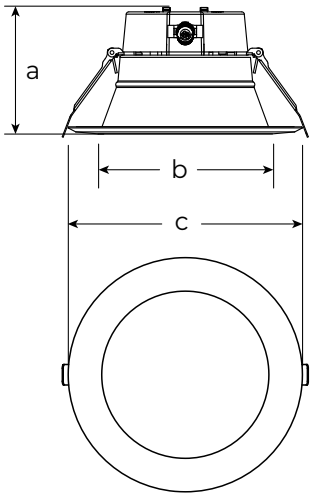


Model	a	b	c	Weight (lbs)	Ceiling (dia.)
4"	1.63"	3.62"	4.92"	0.72	4.33"
6"	1.71"	5.49"	6.88"	0.89	6.06"
8"	1.67"	7.42"	8.87"	1.12	8.07"
10"	1.67"	7.42"	8.87"	1.36	8.98"



MC Cable Length 19"
Overall Wire Length 27"

PLOT



Beam Angle
90°


ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
CCDL-4-TRIM-BL	70545101	CCDL 4" Clip-On Black Trim
CCDL-4-TRIM-SN	70547101	CCDL 4" Clip-On Satin Nickel Trim
CCDL-6-TRIM-BL	70548101	CCDL 6" Clip-On Black Trim
CCDL-6-TRIM-SN	70550101	CCDL 6" Clip-On Satin Nickel Trim
CCDL-8-TRIM-BL	70551101	CCDL 8" Clip-On Black Trim
CCDL-8-TRIM-SN	70553101	CCDL 8" Clip-On Satin Nickel Trim
CCDL-10-TRIM-BL	70554101	CCDL 10" Clip-On Black Trim
CCDL-10-TRIM-SN	70556101	CCDL 10" Clip-On Satin Nickel Trim
DL-46GR	70557101	4" – 6" Goof Ring
DL-68GR	70558101	6" – 8" Goof Ring
DL-810GR	70559101	8 – 10" Goof Ring
DLGP-U	70566101	3"/4"/6"/8" Universal Guide-In Plate
DLGPB-U	70565101	3"/4"/6"/8" Universal Guide-In Plate with Bar Hangers


* External BBU options also available. See ETISSL.com for details.



Clip-On
Black Trims



Clip-On
Black Trims



Goof Rings



Universal
Guide-In Plate



Universal
Guide-In Plate
with Bar Hangers



DL | Canless Downlights
4 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIM



KEY FEATURES

Applications: Ideal for residential and commercial areas, including fitting rooms, bathrooms, hallways, basements and other living spaces.

- **Color Preference®** Select from 4 CCTs (3000K, 3500K, 4000K, 5000K)
- Polycarbonate diffused lens
- Integrated electrical box with knockout holes on top and side for wiring
- 0-10V Dimming
- Rated Life (L70) 50,000 Hours



CATALOG LOGIC

Series	Size	Lumen Pkg. (Nominal/Approx.)	CRI	CCT	MV	D	Finish
DL Canless Downlight	6 (5/6" Dia) 8 (8/10" Dia)	80 (800 lm) 30 (3000 lm)	90 90+ CRI	3 (4 CCT) 3000K/3500K/ 4000K/5000K	Multi Volt 120-277V	0-10V Dimming	BLK Black Finish BLANK White Finish

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
DL-6-80-903-MV-D	53192211	5/6" Canless Downlight, White Finish	4	14W	925 – 1095	3000K 3500K 4000K 5000K	90+	120-277V	0-10V
DL-8-30-903-MV-D	53189111	8/10" Canless Downlight, White Finish	4	32W	2920 – 3261				
DL-8-30-903-MV-D-BK	53189112	8/10" Canless Downlight, Black Finish	4	32W	2920 – 3261				

*Black finish option available for 8/10" only.


ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
DL-10TR	90600193	10" Trim Ring (for 8/10" luminaire only)




* External BBU options available. See ETISSL.com for details.

DIMENSIONS

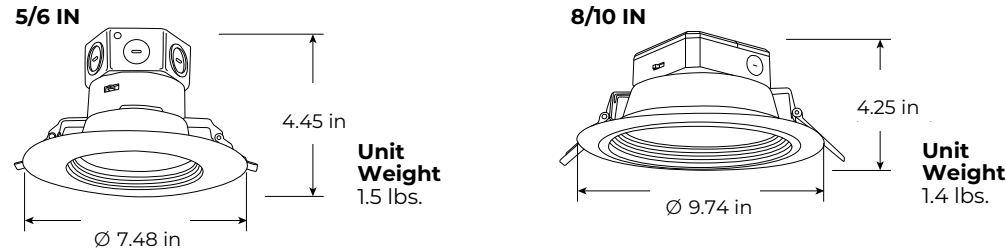

PLOT



Beam Angle
5/6"= 103 ° | 8/10"=108°

Altair Canless Downlights

ETI's Altair Canless Canless Downlight Series has convenient magnetic trims, 5 Selectable CCTs ColorPreference® and is available in 120V and 120-277V options, making them ideal for many residential or commercial applications.



ALCD & ALCG | Altair Canless & Gimbal Canless Downlights

MAGNETIC TRIM SYSTEM | 5 CCT COLOR PREFERENCE® | 120V | 120-277V



KEY FEATURES

ETI Lighting's Altair Canless Downlights and Gimbal Canless Downlights offer quality and flexibility in residential and commercial applications—with single and multi-volt options available. High-output options are also available for 6-inch luminaires. Gimbal versions also available. The ALCD/ALCG family was designed for retrofit, remodel, or new construction applications.

- **Color Preference®** Select from 5 CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- 120V and 120-277V options available
- Low Profile – .04” surface profile. Fits down to 2” plenum space
- Available magnetic black and satin nickel trim options for ALCD
- Rated Life (L70) > 72,000 Hours



CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming
ALCD Altair Canless Downlights	4 (4")	9 90+ CRI	CP5 (5 CCT) 2700K/3000K/3500K/ 4000K/5000K	SV Single-Volt (120V)	TD³ TRIAC
ALCG Altair Gimbal Canless Downlights	6 (6")				
	6HO (6" High Output, ALCD only) ¹				
	8 (8", ALCD only) ¹			MV² Multi-Volt (120-277V)	D³ 0-10V Dimming

- Notes:
1. ALCD available in all size options. ALCG available in 4" or 6" (4, 6) only.
 2. Multi-Volt option is for ALCD Only.
 3. Single-Volt is TRIAC Dimming Only, Multi-Volt is 0-10V Dimming Only.



ALCD & ALCG | Altair Canless & Gimbal Canless Downlights

MAGNETIC TRIM SYSTEM | 5 CCT COLOR PREFERENCE® | 120V | 120-277V


STOCK ORDERING INFORMATION

Catalog Part Number	Order #	Description(Dia.)	Case QTY	CRI	CCT (5CP)	Wattage (Nominal)	Lumen Pkg.	Delivered Lumens	LPW	Volt.	Dim
SINGLE VOLT (120V), TRIAC DIM											
ALCD-4-9CP5-SV-TD	63322101	4" Altair Canless Downlight, 120V, TRIAC Dim	6	90+	2700K	10	800	811	82	120V	TRIAC
					3000K	10	800	851	86		
					3500K	10	800	887	91		
					4000K	10	800	889	91		
					5000K	10	800	845	85		
ALCD-6-9CP5-SV-TD	63323101	6" Altair Canless Downlight, 120V, TRIAC Dim	6	90+	2700K	10	800	831	85	120V	TRIAC
					3000K	10	800	861	88		
					3500K	10	800	893	93		
					4000K	10	800	898	93		
					5000K	10	800	867	88		
ALCD-6HO-9CP5-SV-TD	63323301	6" High Output Altair Canless Downlight, 120V, TRIAC Dim	6	90+	2700K	14	1200	1223	95	120V	TRIAC
					3000K	14	1200	1251	98		
					3500K	14	1200	1288	102		
					4000K	14	1200	1279	101		
					5000K	14	1200	1232	96		
ALCD-8-9CP5-SV-TD	63324101	8" Altair Canless Downlight, 120V, TRIAC Dim	6	90+	2700K	19	1600	1683	92	120V	TRIAC
					3000K	19	1600	1743	96		
					3500K	19	1600	1830	103		
					4000K	19	1600	1843	103		
					5000K	19	1600	1759	96		
ALCG-4-9CP5-SV-TD	63325101	4" Altair Gimbal Canless Downlight, 120V, TRIAC Dim	8	90+	2700K	8	650	699	90	120V	TRIAC
					3000K	8	650	735	95		
					3500K	8	650	759	100		
					4000K	8	650	768	101		
					5000K	8	650	749	96		
ALCG-6-9CP5-SV-TD	63326101	6" Altair Gimbal Canless Downlight, 120V, TRIAC Dim	8	90+	2700K	12	950	1028	90	120V	TRIAC
					3000K	12	950	1078	96		
					3500K	12	950	1120	102		
					4000K	12	950	1136	102		
					5000K	12	950	1109	96		
MULTI-VOLT (120-277V), 0-10V DIM											
ALCD-4-9CP5-MV-D	63322201	4" Altair Canless Downlight, 120-277V, 0-10V Dim	6	90+	2700K	10	800	825	83	120-277V	0-10V
					3000K	10	800	873	89		
					3500K	10	800	900	94		
					4000K	10	800	890	92		
					5000K	10	800	842	86		
ALCD-6-9CP5-MV-D	63323201	6" Altair Canless Downlight, 120-277V, 0-10V Dim	6	90+	2700K	10	800	828	83	120-277V	0-10V
					3000K	10	800	872	87		
					3500K	10	800	906	92		
					4000K	10	800	908	91		
					5000K	10	800	876	88		
ALCD-6HO-9CP5-MV-D	63323401	6" High Output Altair Canless Downlight, 120-277V, 0-10V Dim	6	90+	2700K	14	1200	1258	93	120-277V	0-10V
					3000K	14	1200	1305	97		
					3500K	14	1200	1355	103		
					4000K	14	1200	1350	101		
					5000K	14	1200	1296	95		
ALCD-8-9CP5-MV-D	63324201	8" Altair Canless Downlight, 120-277V, 0-10V Dim	6	90+	2700K	17	1600	1651	99	120-277V	0-10V
					3000K	17	1600	1712	103		
					3500K	17	1600	1795	109		
					4000K	17	1600	1808	110		
					5000K	17	1600	1740	104		

ALCD & ALCG | Altair Canless & Gimbal Canless Downlights

MAGNETIC TRIM SYSTEM | 5 CCT COLOR PREFERENCE® | 120V | 120-277V


DIMENSIONS

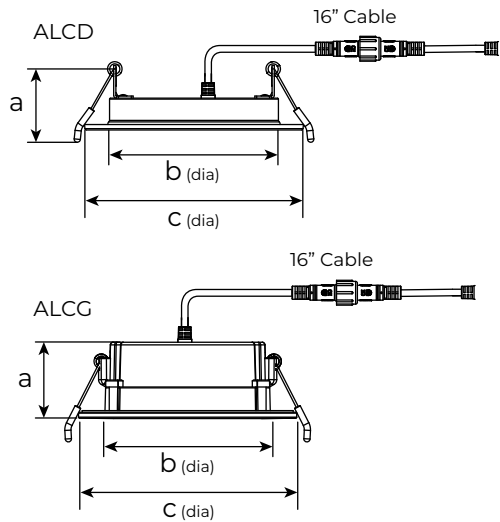

ALCD Canless Downlight					
Model	a	b	c	Weight (lbs)	Ceiling (dia.)
4"	1.63"	3.62"	4.92"	0.79	4.09"
6"	1.71"	5.49"	6.88"	1.02	6.06"
8"	1.67"	7.42"	8.87"	1.54	8.03"


ALCG Gimbal Canless Downlight					
Model	a	b	c	Weight (lbs)	Ceiling (dia.)
4"	1.65"	2.79"	4.72"	0.88	4.09"
6"	1.94"	4.60"	5.79"	1.21	6.06"

PLOT



ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
ALCD-4IN-TRIM-B	70567101	ALCD 4in Black Trim
ALCD-4IN-TRIM-BN	70568101	ALCD 4in Satin Nickel Trim
ALCD-6IN-TRIM-B	70569101	ALCD 6in Black Trim
ALCD-6IN-TRIM-BN	70570101	ALCD 6in Satin Nickel Trim
ALCD-8IN-TRIM-B	70571101	ALCD 8in Black Trim
ALCD-8IN-TRIM-BN	70572101	ALCD 8in Satin Nickel Trim
DLGP-U	70566101	3"/4"/6"/8" Universal Guide-In Plate
DLGPB-U	70565101	3"/4"/6"/8" Universal Guide-In Plate with Bar Hangers
FRCDL-12FT-EXTENCORD	70232101	12-ft Extension Cable
FRCDL-20FT-EXTENCORD	70233101	20-ft Extension Cable

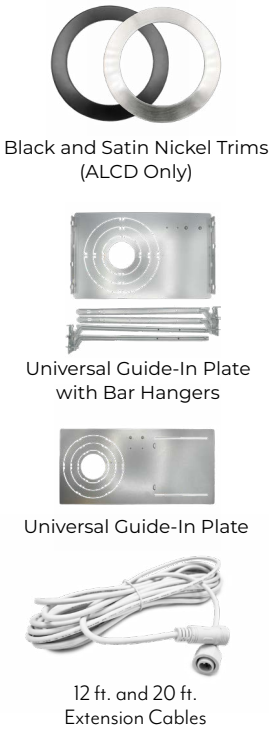

* External BBU options also available. See ETISSL.com for details.




RESIDENTIAL DOWNLIGHTS



DLLP | LowPro Canless Direct Mount Downlights

5 CCT COLOR PREFERENCE® | 120V



KEY FEATURES

Applications: Perfect for multifamily and residential areas, closets, kitchens, bedrooms and other living spaces.

- **Color Preference®** Select from 5 CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- Low Profile – no need for a separate recessed housing
- Suitable for IC or Non-IC applications
- TRIAC dimming down to 10%
- Rated Life (L70) 54,000 Hours
- Wet location Rated



CATALOG LOGIC

Series	Size	Lumens Lumen Pkg. (Nominal/Approx.)	CRI	CCT	Voltage	Dimming
DLLP LowPro Canless Direct	3IN (3" Dia)	550LM	9 90+ CRI	5CP (5 CCT) 2700K/3000K/3500K/ 4000K/5000K	SV Single Volt 120V	TD TRIAC
	4IN (4" Dia)	650LM				
	6IN (6" Dia)	900LM				
	8IN (8" Dia)	1800LM				

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	CRI	CCT	Wattage (Nominal)	Lumen Package	Delivered Lumens	LPW	Volt.	Dim
DLLP-3IN-550LM-9-5CP-SV-TD	53840101	3" LowPro Canless Downlight	24	90+	2700K	10	550	552	57	120V	TRIAC
					3000K	10	550	599	62		
					3500K	10	550	641	67		
					4000K	10	550	648	67		
					5000K	10	550	647	67		
DLLP-4IN-650LM-9-5CP-SV-TD	53808103	4" LowPro Canless Downlight	20	90+	2700K	11	650	734	72	120V	TRIAC
					3000K	11	650	777	76		
					3500K	11	650	835	82		
					4000K	11	650	858	84		
					5000K	11	650	860	84		
DLLP-6IN-900LM-9-5CP-SV-TD	53807103	6" LowPro Canless Downlight	20	90+	2700K	15	900	1142	83	120V	TRIAC
					3000K	15	900	1218	89		
					3500K	15	900	1319	96		
					4000K	15	900	1364	99		
					5000K	15	900	1370	100		
DLLP-8IN-1800LM-9-5CP-SV-TD	538292020	8" LowPro Canless Downlight	10	90+	2700K	25	1800	1898	85	120V	TRIAC
					3000K	25	1800	2079	95		
					3500K	25	1800	2159	99		
					4000K	25	1800	2263	102		
					5000K	25	1800	2268	100		

DLLP | LowPro Canless Direct Mount Downlights

5 CCT COLOR PREFERENCE® | 120V




DIMENSIONS

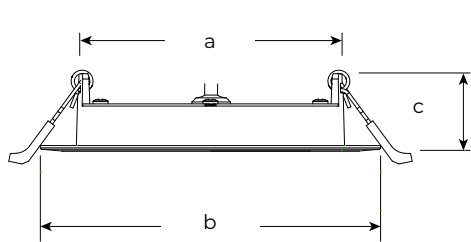

Model	a	b	c	Weight (lbs)	Ceiling (dia.)
3"	2.9"	3.7"	1.1"	0.88	3.125"
4"	3.8"	4.9"	1.1"	1.07	4.25"
6"	5.8"	7.0"	1.1"	1.47	6.19"
8"	7.87"	9.06"	1.2"	2.20	8.25"

PLOT



Beam Angle
110°



ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
LPGP-3IN	70306101	3" Rough-In Guide Plate (new construction)
LPGP-4IN	70307101	4" Rough-In Guide Plate (new construction)
LPGP-6IN	70313101	6" Rough-In Guide Plate (new construction)
DLLP-3IN-G2-TRIM-B	906007970	3" Black Trim
DLLP-3IN-G2-TRIM-BZ	906007960	3" Oil Rubbed Bronze Trim
DLLP-3IN-G2-TRIM-BN	906007980	3" Brushed Nickel Trim
DLLP-4IN-TRIM-B	90600747	4" Black Trim
DLLP-4IN-TRIM-BZ	90600735	4" Oil Rubbed Bronze Trim
DLLP-4IN-TRIM-BN	90600746	4" Brushed Nickel Trim
DLLP-6IN-TRIM-B	90600749	6" Black Trim
DLLP-6IN-TRIM-BZ	90600736	6" Oil Rubbed Bronze Trim
DLLP-6IN-TRIM-BN	90600748	6" Brushed Nickel Trim
LP-12FT-EXTENCORD-IP65	906007760	12ft IP65 Extension Cable (low voltage)
LP-20FT-EXTENCORD-IP65	906007770	20ft IP65 Extension Cable (low voltage)

Black Trim
Sizes: 3", 4", 6"



Oil Rubbed
Bronze Trim
Sizes: 3", 4", 6"



Brushed
Nickel Trim
Sizes: 3", 4", 6"



* External BBU options also available. See ETISSL.com for details.


DLLP-NL | LowPro Canless Direct Mount Downlight with Nightlight
NIGHTLIGHTR™ | 5 CCT COLOR PREFERENCE® | 120V



KEY FEATURES

Applications: Ideal for multifamily and residential areas, home offices, kitchens, bedrooms and other living spaces.

- **NightLightR™** Nightlight accent trim (2000K)
- **Color Preference®** Select from 5 CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- TRIAC dimming down to 10%
- Rated Life (L70) 54,000 Hours
- JA8 Title 24 Compliant
- Wet location Rated

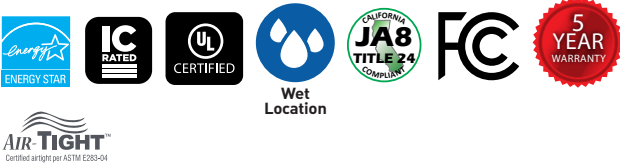

CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming
DLLP-NL LowPro Canless Direct with NightlightR™	3IN (3" Dia)	Lumen Pkg. (Nominal/Approx.) 550LM	9 90+ CRI	SCP (5 CCT) 2700K/3000K/3500K/ 4000K/5000K	SV Single Volt 120V	TD TRIAC
	4IN (4" Dia)	650LM				
	6IN (6" Dia)	900LM				
	8IN (8" Dia)	1800LM				


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	CRI	CCT	Wattage (Nominal)	Lumen Package	Delivered Lumens	LPW	Night Light	Volt.	Dim
DLLP-NL-3IN-550LM-9-5CP-SV-TD	53826102	3" LowPro Canless Downlight with NL	24	90+	2700K	10	550	561	62	4.5W 2000K	120V	TRIAC
					3000K	10	550	596	67			
					3500K	10	550	657	74			
					4000K	10	550	684	77			
					5000K	10	550	649	67			
DLLP-NL-4IN-650LM-9-5CP-SV-TD	53827103	4" LowPro Canless Downlight with NL	16	90+	2700K	11	650	649	67	4.5W 2000K	120V	TRIAC
					3000K	11	650	674	71			
					3500K	11	650	714	76			
					4000K	11	650	731	76			
					5000K	11	650	715	73			
DLLP-NL-6IN-900LM-9-5CP-SV-TD	53828103	6" LowPro Canless Downlight with NL	10	90+	2700K	15	900	895	62	4.5W 2000K	120V	TRIAC
					3000K	15	900	957	67			
					3500K	15	900	1067	76			
					4000K	15	900	1112	78			
					5000K	15	900	1112	76			
DLLP-NL-8IN-1800LM-9-5CP-SV-TD	53829102	8" LowPro Canless Downlight with NL	10	90+	2700K	25	1800	1857	85	4.5W 2000K	120V	TRIAC
					3000K	25	1800	1990	88			
					3500K	25	1800	2158	97			
					4000K	25	1800	2189	97			
					5000K	25	1800	2203	95			

DLLP-NL | LowPro Canless Direct Mount Downlight with Nightlight
NIGHTLIGHTR™ | 5 CCT COLOR PREFERENCE® | 120V




DIMENSIONS

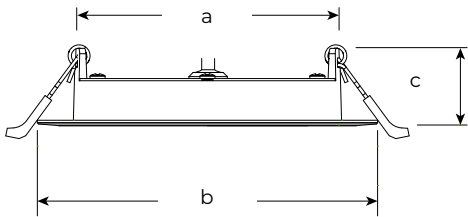

Model	a	b	c	Weight (lbs)	Ceiling (dia.)
3"	2.9"	3.7"	1.1"	0.88	3.125"
4"	3.8"	4.9"	1.1"	1.07	4.25"
6"	5.8"	5.9"	1.1"	1.47	6.19"
8"	7.87"	9.06"	1.2"	2.20	8.25"

PLOT



ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
LPGP-3IN	70306101	3" Rough-In Guide Plate (new construction)
LPGP-4IN	70307101	4" Rough-In Guide Plate (new construction)
LPGP-6IN	70313101	6" Rough-In Guide Plate (new construction)
DLLP-3IN-G2-TRIM-B	906007970	3" Black Trim
DLLP-3IN-G2-TRIM-BZ	906007960	3" Oil Rubbed Bronze Trim
DLLP-3IN-G2-TRIM-BN	906007980	3" Brushed Nickel Trim
DLLP-4IN-TRIM-B	90600747	4" Black Trim
DLLP-4IN-TRIM-BZ	90600735	4" Oil Rubbed Bronze Trim
DLLP-4IN-TRIM-BN	90600746	4" Brushed Nickel Trim
DLLP-6IN-TRIM-B	90600749	6" Black Trim
DLLP-6IN-TRIM-BZ	90600736	6" Oil Rubbed Bronze Trim
DLLP-6IN-TRIM-BN	90600748	6" Brushed Nickel Trim
DL-DMRJ-12FT-EXT	906008520	12ft IP65 Extension Cable (low voltage)
DL-DMRJ-20FT-EXT	906008530	20ft IP65 Extension Cable (low voltage)

Black Trim
Sizes: 3", 4", 6"



Oil Rubbed Bronze Trim
Sizes: 3", 4", 6"



Brushed Nickel Trim
Sizes: 3", 4", 6"



* External BBU options also available. See ETISSL.com for details.

DL | 5” LowPro Canless Direct Mount Downlight

4 CCT COLOR PREFERENCE® | 120V



KEY FEATURES

Applications: Ideal for multifamily and residential areas, home offices, kitchens, bedrooms and other living spaces where 5” downlight is desired.

- **Color Preference®** Select from 4 CCTs (2700K, 3000K, 4000K, 5000K)
- JA8 Title 24 Compliant
- TRIAC dimming down to 10%
- Rated Life (L70) >54,000 Hours



CATALOG LOGIC


Series	Size	Lumens	CRI	CCT	Voltage	Dimming
DL LowPro Canless Direct	5 (5" Dia)	Lumen Pkg. (Nominal/Approx.) 90 (900 lm)	90 90+ CRI	6 4 CCT 27/3/4/5000K	SV Single Volt 120V	TD TRIAC

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
DL-5-90-906-SV-D	53807211	5” LowPro Canless Downlight	20	15W	964-1243	2700K 3000K 4000K 5000K	90+	120V	TRIAC

* External BBU options also available. See ETISSL.com for details.


DIMENSIONS

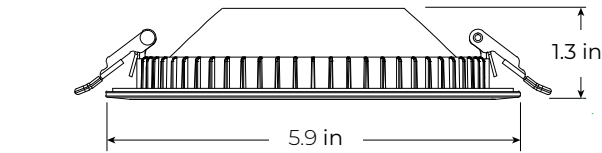

Unit Weight
1 lbs.

Ceiling Dia.
5.125" to 5.75"

PLOT



Beam Angle
108°



DLSQ | Square Canless Direct Mount Downlights with Nightlight

MAGNETIC TRIM SYSTEM | NIGHTLIGHTR™ | 5 CCT COLOR PREFERENCE® | 120V



KEY FEATURES

Applications: Ideal for residential applications. Use in bedrooms, living rooms, hallways, foyers, kitchens and other residential spaces.

- **NightLightR™** Nightlight accent trim (2000K)
- **Color Preference®** Select from 5 CCTs (2700, 3000K, 3500K, 4000K, 5000K)
- Magnetic Trim System - white and black trims are easy to swap out and magnetically secure onto fixture
- Rated Life (L70) 50,000 Hours



CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming
DLSQ Square Canless Downlight with NightlightR™	4IN (4" Dia) 6IN (6" Dia)	Lumen Pkg. (Nominal/Approx.) 660LM 1000LM	9 90+ CRI	5CP 5 CCT 27/3/35/4/5000K	SV Single Volt 120V	TD TRIAC




Included
Black
Magnetic Trim



STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	Night Light	CRI	Volt.	Dim
DLSQ-4IN-660LM-9-5CP-SV-TD	538661020	4" Square Slim Canless Downlight	4	11W	703 – 789	2700K 3000K 3500K	4.5W 2000K	90+	120V	TRIAC
DLSQ-6IN-1000LM-9-5CP-SV-TD	538671020	6" Square Slim Canless Downlight	4	14W	1070 – 1316	4000K 5000K				

DIMENSIONS

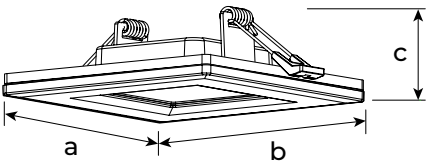

Model	a	b	c	weight (lbs)	Ceiling Dia.
4"	4.96"	4.96"	1.57"	1.14	4" – 4.3"
6"	7"	7"	1.57"	1.72	6" – 6.25"

PLOT



Beam Angle
4"= 107 ° | 6"=109°



FRCDL | Fire-Rated Canless Downlights


5 CCT COLOR PREFERENCE® | 120V



KEY FEATURES

Our Fire-Rated Downlights withstand temperatures up to 1100° for up to two hours, significantly decreasing the time it takes for fires to spread. They are ideal for new or retrofit construction projects for multifamily, assisted living facilities, and more.

- **Fire Rated** – withstand temperatures up to 1100° for up to two hours, compliant with UL-263
- **Color Preference®** Select from 5 CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- No need for additional fire-rated boxes to shroud the light fixtures
- Low Profile – .04” surface profile. Fits down to 2” plenum space
- Rated Life (L70) >72,000 Hours

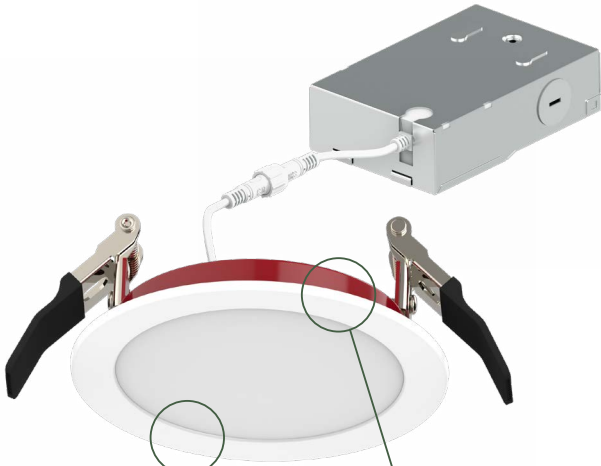

High-Impact Polycarbonate Diffuser Lens

Steel-Back Housing
Trim and housing are integrated

CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming
FRCDL Fire-Rated Canless Downlights	3IN (3" Dia)	Lumen Pkg. (Nominal/Approx.) 500LM	9 90+ CRI	CP5 (5 CCT) 2700K/3000K/3500K/ 4000K/5000K	SV Single Volt 120V	TD TRIAC
	4IN (4" Dia)	800LM				
	6IN (6" Dia)	1200LM				
	8IN (8" Dia)	1800LM				

STOCK ORDERING INFORMATION



Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FRCDL-3IN-500LM-9-CP5-SV-TD	63312101	3" Fired-Rated Canless Downlight	4	6.5	530	2700K	90+	120V	TRIAC
				6.5	548	3000K			
				6.5	564	3500K			
				6.5	568	4000K			
				6.5	555	5000K			
FRCDL-4IN-800LM-9-CP5-SV-TD	63309101	4" Fired-Rated Canless Downlight	4	10	812	2700K	90+	120V	TRIAC
				10	870	3000K			
				10	918	3500K			
				10	919	4000K			
				10	867	5000K			
FRCDL-6IN-1200LM-9-CP5-SV-TD	63310101	6" Fired-Rated Canless Downlight	4	14	1215	2700K	90+	120V	TRIAC
				14	1258	3000K			
				14	1310	3500K			
				14	1313	4000K			
				14	1254	5000K			
FRCDL-8IN-1600LM-9-CP5-SV-TD	63313101	8" Fired-Rated Canless Downlight	4	19	1746	2700K	90+	120V	TRIAC
				19	1814	3000K			
				19	1909	3500K			
				19	1924	4000K			
				19	1839	5000K			

FRCDL | Fire-Rated Canless Downlights

5 CCT COLOR PREFERENCE® | 120V



DIMENSIONS / DETAILS

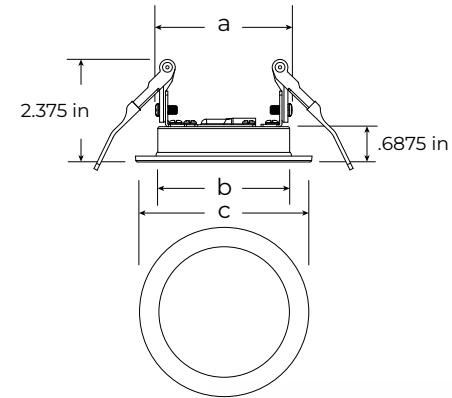


Model	a	b	c	Weight (lbs)	Ceiling (dia.)
3"	2.75"	2.5625"	3.5625"	.88 lbs	2.79" dia
4"	3.875"	3.625"	4.75"	1.02 lbs	3.9" dia
6"	5.8125"	5.5"	6.8125"	1.38 lbs	5.87" dia
8"	7.625"	7.4375"	8.875"	2.16 lbs	7.68" dia



ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
LPGP-3IN	70306101	3" Rough-In Guide Plate (new construction)
LPGP-4IN	70307101	4" Rough-In Guide Plate (new construction)
LPGP-6IN	70313101	6" Rough-In Guide Plate (new construction)
FRCDL-12FT-EXTENCORD	70232101	12ft Fire-Rated Extension Cable
FRCDL-20FT-EXTENCORD	70233101	20ft Fire-Rated Extension Cable

PLOT



Beam Angle
110°



Rough-in Guide Plates for New Construction




12 ft. and 20 ft. Fire-Rated Extension Cables



DLJB | Canless | Recessed Downlights with Integral J-Box

5 CCT COLOR PREFERENCE® | 120V



KEY FEATURES

Applications: Suited for residential areas, bathrooms, kitchens, bedrooms and other living spaces.

- **Color Preference®** Select from 5 CCTs (27/3/35/4/5000K)
- Wire connections inside housing – no need for recessed can or separate J-box
- Wet location rated
- TRIAC dimming down to 10%
- Rated Life (L70) >80,000 Hours



CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming
DLJB Downlight w/ Integral J-box	4IN (4" Dia) 6IN (6" Dia)	Lumen Pkg. (Nominal/Approx.) 720LM 880LM	9 90+ CRI	5CP 5 CCT 27/3/35/4/5000K	SV Single Volt 120V	TD TRIAC


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
DLJB-4IN-720LM-9-5CP-SV-TD	538411020	4" Canless Downlight	6	12W	711 – 926	2700K 3000K 3500K 4000K 5000K	90+	120V	TRIAC
DLJB-6IN-880LM-9-5CP-SV-TD	538421020	6" Canless Downlight	6	14W	858 – 1134				

* External BBU options also available. See ETISSL.com for details.


DIMENSIONS

4 IN




Unit Weight 0.85 lbs.
Ceiling Dia. 4.25"

6 IN

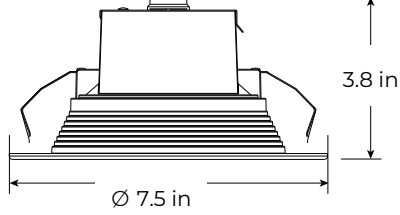

Unit Weight 1.08 lbs.
Ceiling Dia. 6.22"

PLOT



Beam Angle
4"= 103 ° | 6"=102°



RETROFITS



ARDL & ARDG | Altair Retrofit & Gimbal Downlights

5 CCT COLOR PREFERENCE® | DETACHABLE E26 BASE | 120V



KEY FEATURES


ETI Lighting's Altair Retrofit Downlights and Retrofit Gimbal Downlights are efficient and versatile—great for retrofit, remodel, or new construction projects. Each downlight comes with a detachable E26 base and can be used in standard sockets or hard-wired. With a wet location rating, they are ideal for indoor or covered environments, such as above showers or Porte-cochères.

- **Color Preference®** Select from 5 CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- Retrofit (E26) Socket Adapter included
- TRIAC dimming down to 10%
- Rated Life (L70) > 65,000 Hours



CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming
ARDL Altair Retrofit Downlights	4 (4" Dia) 6 (5/6" Dia)	90 90+ CRI	CP5 (5 CCT) 2700K/3000K/3500K/ 4000K/5000K	SV Single Volt 120V	TD TRIAC Dimming
ALCG Altair Gimbal Canless Downlights					

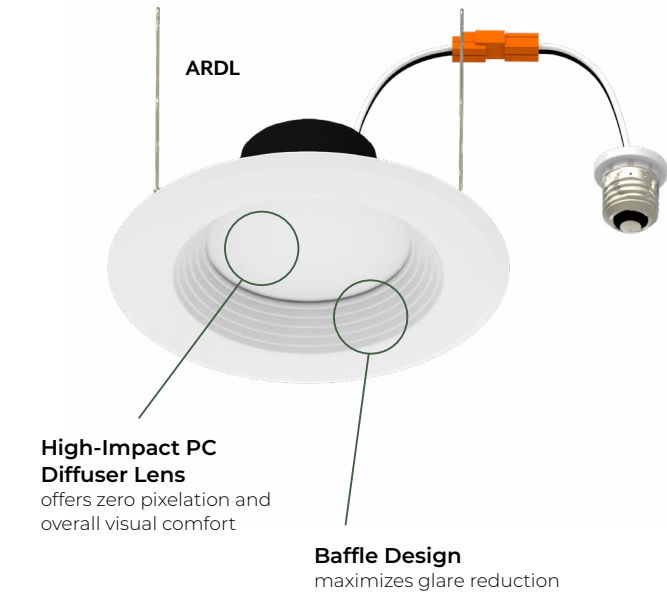

FLEXIBLE ILLUMINATION
350° ROTATION | 30° TILT

Direct light where it's needed most with Gimbal option.



ARDL & ARDG | Altair Retrofit & Gimbal Downlights

5 CCT COLOR PREFERENCE® | DETACHABLE E26 BASE | 120V

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Voltage	Dimming
ARDL-4-9CP5-SV-TD	63318101	4" Altair Retrofit Downlight, 120V, TRIAC Dim	6	8	757	2700K	90+	120V	TRIAC
				8	784	3000K			
				8	826	3500K			
				8	835	4000K			
				8	807	5000K			
ARDL-6-9CP5-SV-TD	63319101	5/6" Altair Retrofit Downlight, 120V, TRIAC Dim	6	10.5	966	2700K	90+	120V	TRIAC
				10.5	1024	3000K			
				10.5	1076	3500K			
				10.5	1087	4000K			
				10.5	1054	5000K			
ARDG-4-9CP5-SV-TD	63320101	4" Altair Retrofit Gimbal Downlight, 120V, TRIAC Dim	4	8	748	2700K	90+	120V	TRIAC
				8	790	3000K			
				8	834	3500K			
				8	851	4000K			
				8	845	5000K			
ARDG-6-9CP5-SV-TD	63321101	5/6" Altair Retrofit Gimbal Downlight, 120V, TRIAC Dim	4	10	945	2700K	90+	120V	TRIAC
				10	998	3000K			
				10	1039	3500K			
				10	1046	4000K			
				10	1014	5000K			

DIMENSIONS

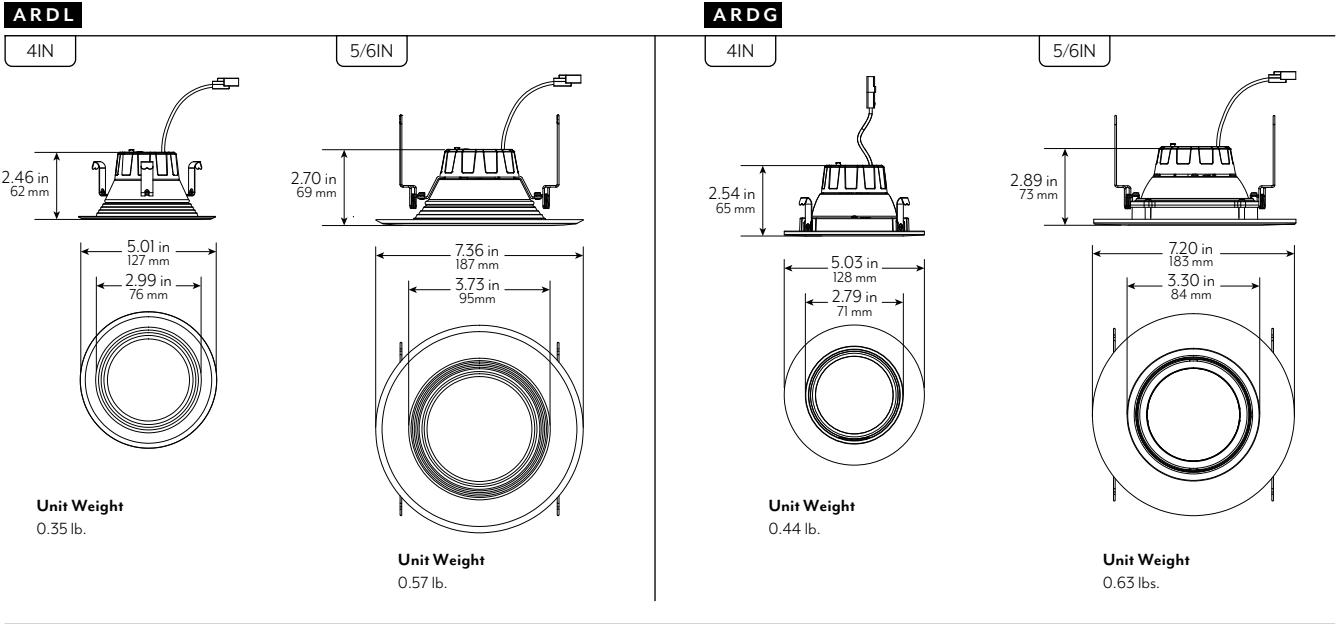

Beam Angle
96°

DL | Retrofit Downlights with Nightlight

5 CCT COLOR PREFERENCE® | NIGHTLIGHTR™ | 120V



KEY FEATURES

Applications: Perfect for residential areas, home offices, kitchens and other living spaces.

- **NightLightR™** Nightlight accent trim (2000K)
- **Color Preference®** Select from 5 CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- Retrofit (E26) Socket Adapter included
- TRIAC dimming down to 10%
- Rated Life (L70) >55,000 Hours




CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming
DL Downlight		Lumen Pkg. (Nominal/Approx.)	90	7 (5 CCT) 2700K/3000K/3500K/ 4000K/5000K	SV Single Volt 120V	TD TRIAC
	4 (4" Dia)	625 (625 lm)				
	6 (6" Dia)	67 (670 lm)				

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
DL-4-625-907-SV-D	53805102	4" Retrofit Downlight w/Nightlight	4	10W	617 – 734	2700K 3000K 3500K	90+	120V	TRIAC
DL-6-67-907-SV-D	53804102	6" Retrofit Downlight w/Nightlight	4	10W	688 – 766	4000K 5000K			


DIMENSIONS

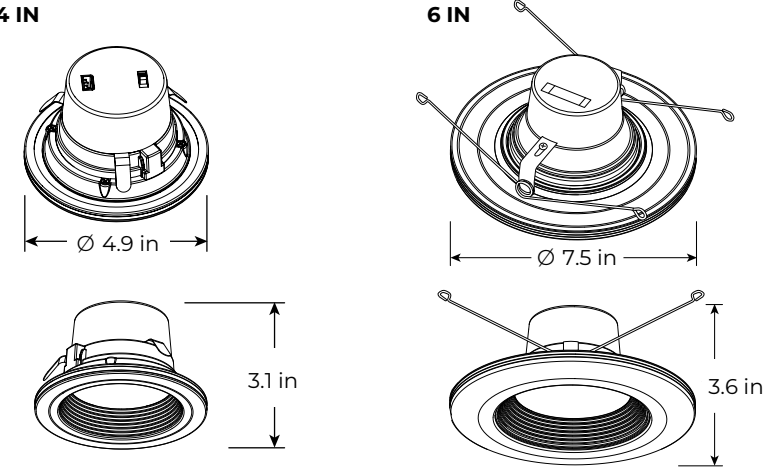

Unit Weight
0.6 lbs.

Unit Weight
0.9 lbs.

PLOT



Beam Angle
102°



DL | 30-IN-1 Downlights

5 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 2 TRIMS | 120V



KEY FEATURES

Applications: Suited for residential areas, bathrooms, kitchens, bedrooms and other living spaces.

- **Lumen Boost®** Select from 3 lumen levels
- **Color Preference®** Select from 5 CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- 30 customizable light configurations — 2 baffle trim rings
- Wet location rated
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours



30 LUMINAIRE CONFIGURATIONS
5 Selectable CCTs
X
3 Selectable Lumen levels
X
2 Baffle Trim Ring Options

Included
Black & White
Baffle Trim Rings



CATALOG LOGIC


Series	Size	Lumens	CRI	CCT	Voltage	Dimming
DL Downlight		Lumen Pkg. (Nominal/Approx.)	90	7 (5 CCT) 2700K/3000K/3500K/ 4000K/5000K	SV Single Volt 120V	TD TRIAC
	4 (4" Dia)	10 (3-Lumen, up to 1000lm)				
	6 (6" Dia)	11 (3-Lumen, up to 1100 lm)				

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
DL-4-10-907-SV-D	53802102	4" 30-in-1 Retrofit Downlight	4	9/11/13W	573 – 1010	2700K 3000K 3500K	90+	120V	TRIAC
DL-6-11-907-SV-D	53801102	6" 30-in-1 Retrofit Downlight	4	10/12/14W	653 – 1178	4000K 5000K			

* External BBU options also available. See ETISSL.com for details.


DIMENSIONS

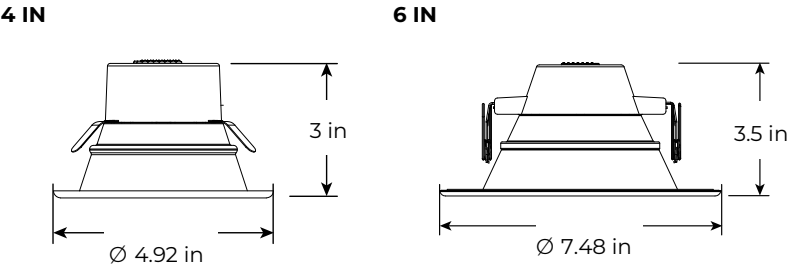

Unit Weight
0.6 lb.

Unit Weight
0.9 lb.

PLOT



Beam Angle
96°



DL | Retrofit Downlights – 2700K

2700K | 120V

KEY FEATURES

Applications: Ideal for residential and multifamily areas, home offices, kitchens, bedrooms, bathrooms and other living spaces.

- Included E26 base makes retrofit installation easy and efficient
- Suitable for IC or Non-IC applications
- TRIAC dimming down to 10%
- Rated Life (L70) > 50,000 Hours



CATALOG LOGIC


Series	Size	Lumens	CRI	CCT	Voltage	Dimming
DL Downlight Retrofit	6 (6" Dia)	Lumen Pkg. (Nominal/Approx.) 67 (670 lm)	8 80+ CRI	27 2700K	SV Single Volt 120V	TD TRIAC

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
DL-6-67-827-SV-D	53193101	5/6" Retrofit Downlight	4	9W	763.5	2700K	80+	120V	TRIAC


* External BBU options available. See ETISSL.com for details.

DIMENSIONS

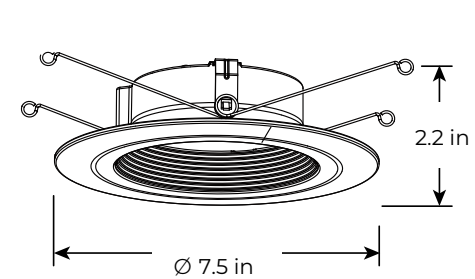

Unit Weight
0.8 lb.

PLOT



Beam Angle
4"= 105 ° | 5/6"=101°



SURFACE MOUNTS



Stylish Illumination

With multiple trims and motion sensing option, ETI's dimmable Surface Mount Downlights bring minimalistic functionality to any residential space.



ALSD | Altair Surface Mount Downlights

5 CCT COLOR PREFERENCE® | PIR OCCUPANCY SENSOR | 120V



KEY FEATURES

ETI Lighting's Altair Surface Mount Downlights with PIR Motion Sensor adds hands-free lighting to residential spaces. Ideal for pantries, laundry rooms, and more.

- **Color Preference®** Select from Single, 3 or 5 CCTs
- 90+ CRI
- PIR Motion Sensor: 120°, at 11 feet sensing distance
- TRIAC dimming down to 10%
- Rated Life (L70) >130,000 Hours
- 6" Retrofit kit with E26 Adapter available as accessory



6" with PIR Motion Sensor



6" Only

CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming	Sensor
ALSD Altair Surface Mount Downlight	6 (6" Dia)	9 90+ CRI	CP3 3000/4000/5000K	SV Single Volt 120V	TD TRIAC	OS PIR Occupancy Sensor

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
ALSD-4-9CP5-SV-TD	63327101	4" Altair Surface Mount Downlight, CP5 – 1-Pack	1	10	908	2700K	90+	120V	TRIAC
				10	952	3000K			
				10	970	3500K			
				10	972	4000K			
				10	950	5000K			
ALSD-6-9CP5-SV-TD	63328101	6" Altair Surface Mount Downlight, CP5 – 1-Pack	1	15	1232	2700K	90+	120V	TRIAC
				15	1320	3000K			
				15	1357	3500K			
				15	1357	4000K			
				15	1307	5000K			
ALSD-6-9CP5-SV-TD-6PK	63328101-6PK	6" Altair Surface Mount Downlight, CP5 – 6-Pack	6	15	1232	2700K	90+	120V	TRIAC
				15	1320	3000K			
				15	1357	3500K			
				15	1357	4000K			
				15	1307	5000K			
ALSD-6-930K-SV-TD-6PK	63328111	6" Altair Surface Mount Downlight, 3000K – 6-Pack	6	15	1268	3000K	90+	120V	TRIAC
ALSD-6-940K-SV-TD-6PK	63328141	6" Altair Surface Mount Downlight, 4000K – 6-Pack	6	15	1310	4000K	90+	120V	TRIAC
ALSD-6-9CP3-SV-TD-OS	63328102	6" Altair Surface Mount Downlight, CP3 with PIR Occupancy Sensor – 1-Pack	1	15	947	3000K	90+	120V	TRIAC
				15	1078	4000K			
				15	960	5000K			

ALSD | Altair Surface Mount Downlights

3 CCT COLOR PREFERENCE® | PIR OCCUPANCY SENSOR | 120V

ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
ALSD-6-TRIM-BL	70576101	Altair Series 6" Surface Mount Downlight Clip-On Black Trim
ALSD-6-TRIM-SN	70578101	Altair Series 6" Surface Mount Downlight Satin Clip-On Nickel Trim
ALSD-6-RETROFIT KIT	70605101	Altair Series 6" Friction Clips with E26 adapter




Black and Satin Nickel Clip-On Trims




6" Retrofit Kit Friction Clips with E26 adapter

DIMENSIONS / DETAILS

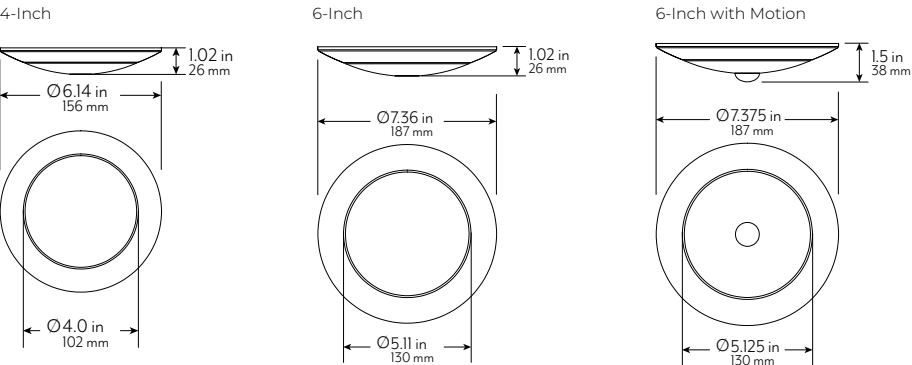


MOTION SENSOR OPERATION

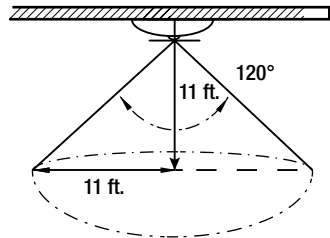

30 Second Hold Time Non-adjustable

PLOT



Beam Angle 110°



FMDL | SMD6 Flush Mount Disks

TWISTFIT MOUNTING SYSTEM | 3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

- Applications: Perfect for residential areas, home offices, kitchens and other living spaces. Also great for closets and showers.
- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
 - Single 3000K CCT products also available
 - **TwistFit™** mounting system that easily mounts to existing junction boxes for fast installation
 - Retrofit Mounting Kit (E26) and Junction Box options available for 5/6” recessed can
 - Mimics look of traditional 6” recessed downlights
 - TRIAC dimming down to 10%
 - Rated Life (L70) >50,000 Hours



FMDL | SMD6 Flush Mount Disks

TWISTFIT MOUNTING SYSTEM | 3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING

CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming
FMDL SMD6 Surface Mount 7.5" Downlight	7.5IN	Lumen Pkg. (Nominal/Approx.) 1000LM 1500LM*	8 80+ CRI	CP3 3000/4000/5000K 30K 3000K	SV Single Volt 120V	TD TRIAC

* 1500K available only for CP3

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FMDL-7.5IN-1000LM-8-CP3-SV-TD	56578211	1000 lm package, 7.5" SMD6 Disk, 3CCT	6	90W	14W	998-1126	3000K 4000K 5000K	80+	120V	TRIAC
FMDL-7.5IN-1500LM-8-CP3-SV-TD	56578311	1500 lm package, 7.5" SMD6 Disk, 3CCT	6	100W	20W	1508-1682				
FMDL-7.5IN-1000LM-8-30K-SV-TD	56578111	1000 lm package, 7.5" SMD6 Disk, 3000K	6	90W	14W	998-1126	3000K			


ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
FMDL-TRIM-B	90600754	Black Trim
FMDL-TRIM-BZ	90600755	Oil Rubbed Bronze Trim
FMDL-TRIM-BN	90600756	Brushed Nickel Trim
FLDL-RETROFITKIT	95657811101	Retrofit Torsion Spring with E26 Adapter Kit




* External BBU options also available. See ETISSL.com for details.

DIMENSIONS

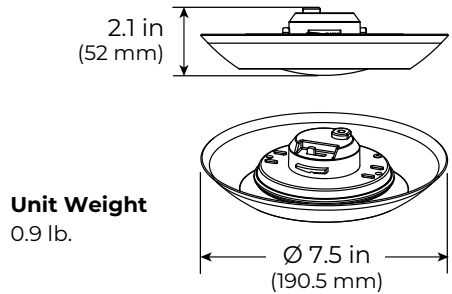

PLOT



FLUSH MOUNTS





FLUSH MOUNTS

ROUND



PVFM | Pivot Series Flush Mounts

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: A versatile choice for residential areas, Pivot Series Flush Mounts offer a modern, timeless design ideal for bedrooms, hallways, kitchens, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Diameter	CRI	CCT	Voltage	Dimming	Finish
PVFM Pivot Flush Mount	11 (11") 13 (13") 15 (15")	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	WH White

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
PVFM-11-8CP3-SV-TD-WH	C01168401A	11" Pivot Flush Mount	2	14W	1148 – 1268	3000K 4000K 5000K	80+	120V	TRIAC
PVFM-13-8CP3-SV-TD-WH	C01169401A	13" Pivot Flush Mount	2	22W	1713 – 1857				
PVFM-15-8CP3-SV-TD-WH	C01170401A	15" Pivot Flush Mount	2	30W	2417 – 2695				

DIMENSIONS

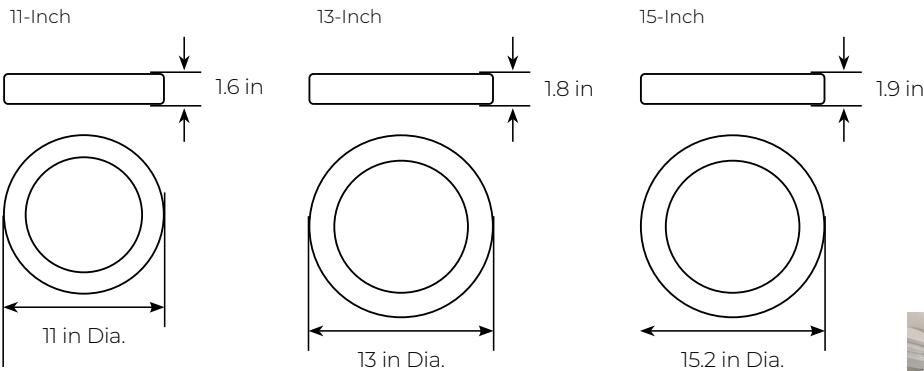


Unit Weight
1.19 lbs.

Unit Weight
1.76 lbs.

Unit Weight
2.38 lbs.

PLOT



Beam Angle
114°



KOFM | KOA Series Flush Mounts
5 CCT COLOR PREFERENCE® | NIGHTLIGHTR™ | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Perfect for residential spaces with natural wood tones and modern décor, KOA Series Flush Mounts feature a matte black finish with oak accents—available in both drum and tapered styles.

- **Color Preference®** Select from 5 CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- **NightLightR™** Nightlight accent trim (2000K)
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Diameter	CRI	CCT	Voltage	Dimming	Finish
KOFM KOA Flush Mount	14 (14") 14T (14" Tapered)	8 80+ CRI	CP5NL 5 CCT with 2000K Night Light	SV Single Volt 120V	TD TRIAC	BL Black


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
KOFM-14-8CP5NL-SV-TD-BL	C01176301A	14" KOA Flush Mount, Drum Style	2	20W	1498 – 1630	3000K 4000K 5000K	80+	120V	TRIAC
KOFM-14T-8CP5NL-SV-TD-BL	C01177301A	14" KOA Flush Mount, Tapered Style	2	20W	1268 – 1359				

DIMENSIONS

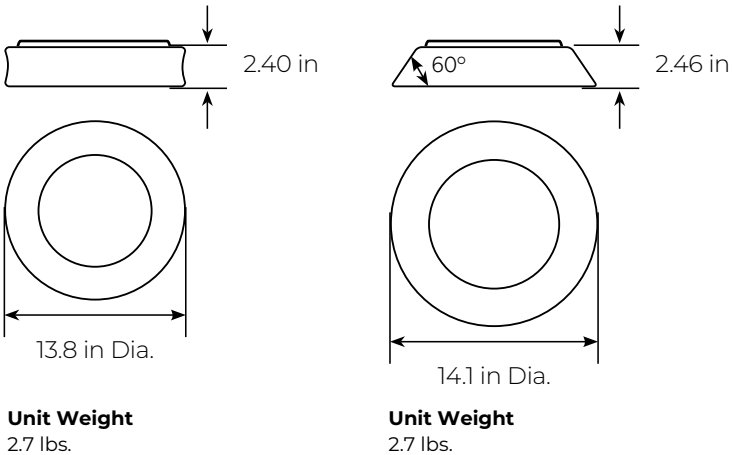

PLOT




CTFM | Century Series Flush Mounts
3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Designed for flexibility in residential spaces, Century Series Flush Mounts offer a clean, modern look ideal for living rooms, bedrooms, kitchens, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours

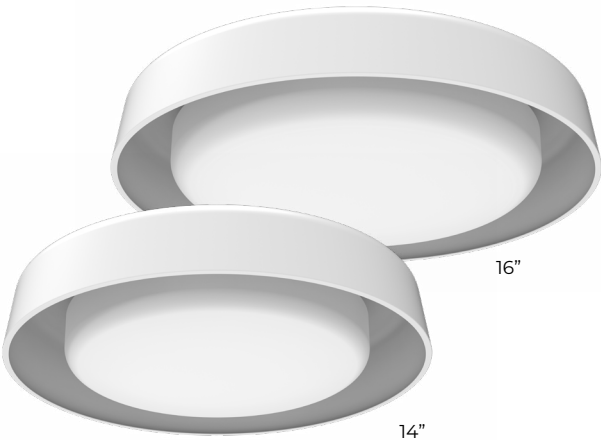


CATALOG LOGIC

Series	Diameter	CRI	CCT	Voltage	Dimming	Finish
CTFM Century Flush Mount	14 (14") 16 (16")	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	WH White


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
CTFM-14-8CP3-SV-TD-WH	C01171401A	14" Century Flush Mount	2	22W	1688 – 1849	3000K 4000K 5000K	80+	120V	TRIAC
CTFM-16-8CP3-SV-TD-WH	C01172401A	16" Century Flush Mount	2	22W	1817 – 1994				

DIMENSIONS

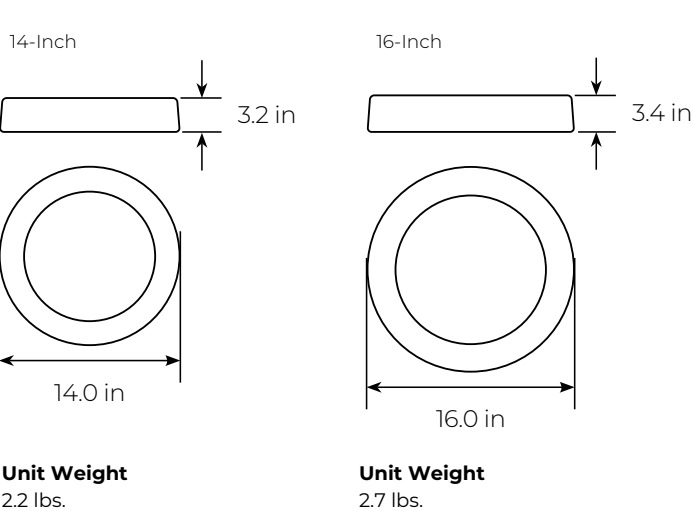

PLOT



GBFM | Gatsby Series Flush Mounts

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Ideal for residential spaces including kitchens, bedrooms, dining rooms, and more—featuring an elegant Art Deco design.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours



Black with
Brushed
Nickel Trim

White with
Gold Trim

CATALOG LOGIC

Series	Diameter	CRI	CCT	Voltage	Dimming	Finish	Trim
GBFM Gatsby Flush Mount	13 (13")	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	WH White BL Black	GT Gold Trim BNT Brushed Nickel Trim

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Trim Color	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
GBFM-13-8CP3-SV-TD-WH-GT	C01173402A	Gold Trim	2	22W	1913 – 2068	3000K 4000K 5000K	80+	120V	TRIAC
GBFM-13-8CP3-SV-TD-BL-BNT	C01173403A	Brushed Nickel	2	22W	1810 – 2001				

DIMENSIONS

PLOT

Beam Angle
125°



ESFM | Estelle Series Flush Mounts

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: A stylish addition to modern, eclectic, and retro-inspired spaces, the Estelle Series brings an Art Deco flair and a unique, modern-retro feel to any room.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Diameter	CRI	CCT	Voltage	Dimming	Finish	Trim
ESFM Estelle Flush Mount	15 (15")	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	BL Black WH White	GT Gold Trim

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
ESFM-15-8CP3-SV-TD-BL-GT	C01184401A	Black Finish with Gold Trim	2	30W	1531 – 1742	3000K 4000K 5000K	80+	120V	TRIAC
ESFM-15-8CP3-SV-TD-WH-GT	C01184402A	White Finish with Gold Trim	2	30W	2059 – 2326				

DIMENSIONS

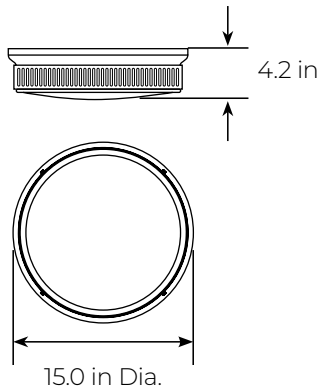

Unit Weight
2.5 lbs.

PLOT



MWFM | Midwest Flush Mount

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Inspired by Midwest comfort, this classically designed fixture complements a range of décor styles—from minimalistic to eclectic—making it a perfect fit for living rooms, bedrooms, and other cozy residential spaces.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Diameter	CRI	CCT	Voltage	Dimming	Finish
MWFM Midwest Flush Mount	13 (13")	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	W White

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
MWFM-13-8CP3-SV-TD-W	C01183401A	13" Midwest Flush Mount, Matte White Finish	2	22W	1749 – 1909	3000K 4000K 5000K	80+	120V	TRIAC

DIMENSIONS

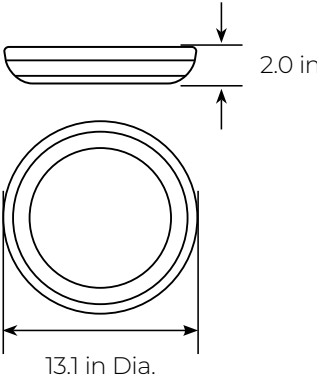

Unit Weight
2.6 lbs.

PLOT



ASFM | Astoria Flush Mount

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: With intricate black trim and soft, diffused light quality, ETI Lighting's Astoria Flush Mount will add class to any residential space. Great for living rooms, entry ways, home offices and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Diameter	CRI	CCT	Voltage	Dimming	Finish
ASFM Astoria Flush Mount	15 (15")	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	BL Black

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
ASFM-15-8CP3-SV-TD-BL	C01174401A	15" Astoria Flush Mount	2	30W	2043 – 2327	3000K 4000K 5000K	80+	120V	TRIAC

DIMENSIONS

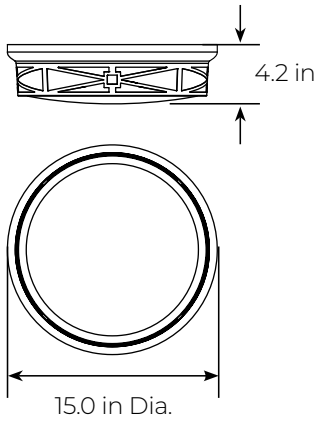

Unit Weight
2.3 lbs.

PLOT



Beam Angle
135°



FM | 7" Low Profile Ceiling Flush Mount

4000K | 120V | NON-DIMMABLE

KEY FEATURES

Applications: Ideal for residential and multifamily areas, home offices, kitchens, bedrooms, bathrooms and other living spaces.

- Modern, sleek fixture
- Light weight for easier install—just over 1/2 lb.
- Hardwire, electrical box screws and wire connectors included
- Mounting screws and bracket included
- Durable acrylic lens that will not yellow over time
- 4000K, 80+ CRI
- Rated Life (L70) 50,000 Hours



CATALOG LOGIC


Series	Diameter	Wattage	CRI / CCT	Voltage	Dimming
FM 7" Ceiling Flush Mount	7 7"	Lumen Pkg. (Nominal/Approx.) 11 (11.5W, 810 lm)	840 80+ CRI 4000K	SV Single Volt 120V	N-O Non-Dim

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FM-7-11-840-SV-N-O	54663142	7" low profile acrylic flush mount	6	60W	11.5W	936.7	4000K	80+	120V	Non-Dim


* External BBU options available. See ETISSL.com for details.

DIMENSIONS

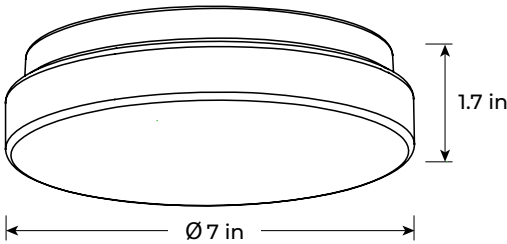

Unit Weight
0.6 lb.


PLOT



Beam Angle
120°


FMNL | 7.5” LowPro Ceiling Flush Mounts with Nightlight

TWISTFIT MOUNTING SYSTEM | 3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™



KEY FEATURES

- Applications: Perfect for residential areas, home offices, kitchens and other living spaces.
- **NightLightR™** Nightlight accent trim (2000K)
 - **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
 - **TwistFit™** mounting system that easily mounts to existing junction boxes for fast installation
 - Retrofit Mounting Kit (E26) and Junction Box options available
 - TRIAC dimming down to 10%
 - Rated Life (L70) >50,000 Hours

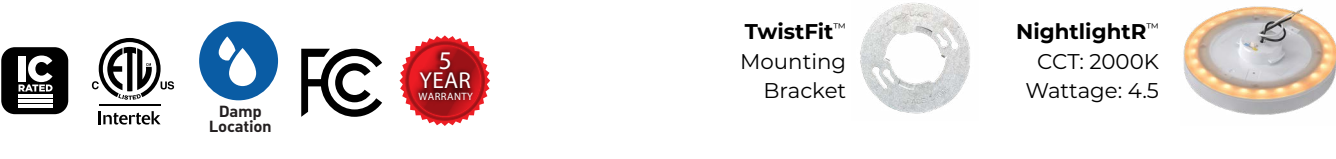

CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming	Finish
FMNL 7.5" Ceiling Flush Mount w/Nightlight	7.5IN	Lumen Pkg. (Nominal/Approx.) 800LM	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	BK Black WT White BN Brushed Nickel

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Trim Color	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FMNL-7.5IN-800LM-8-CP3-SV-TD-WT	56568114	White	4	90W	12W	955 – 999	3000K 4000K 5000K	80+	120V	TRIAC
FMNL-7.5IN-800LM-8-CP3-SV-TD-BN	56568116	Brushed Nickel								

ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
FMLP-RETROFITKIT	95657611101	E26 Adapter with Torsion Springs Kit
FMLP-JBOX	90600760	Junction Box




DIMENSIONS



Unit Weight
1.3 lbs.


PLOT



Beam Angle
100°

FMNL | 11” LowPro Ceiling Flush Mounts with Nightlight

SNAPFIT MOUNTING SYSTEM | 3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™



KEY FEATURES

- Applications: Perfect for residential areas, home offices, kitchens, bedrooms and other living spaces.
- **NightLightR™** Nightlight accent trim (2000K)
 - **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
 - **SnapFit™** mounting system that easily mounts to existing junction boxes for fast installation
 - J-Box included
 - Retrofit Mounting Kit (E26) and Junction Box options available
 - TRIAC dimming down to 10%
 - Rated Life (L70) >54,000 Hours



CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming	Finish
FMNL 11" Ceiling Flush Mount w/Nightlight	11IN	Lumen Pkg. (Nominal/Approx.) 900LM	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	WT White ORB Oil Rubbed Bronze BN Brushed Nickel

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Trim Color	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FMNL-11IN-900LM-8-CP3-SV-TD-WT	56572113	White	2	90W	14W	1203 – 1334	3000K 4000K 5000K	80+	120V	TRIAC
FMNL-11IN-900LM-8-CP3-SV-TD-BN	56572114	Oil Rubbed Bronze								
FMNL-11IN-900LM-8-CP3-SV-TD-ORB	56572115	Brushed Nickel								

ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
FMLP-RETROFITKIT	95657611101	E26 Adapter with Torsion Springs Kit




DIMENSIONS / DETAILS

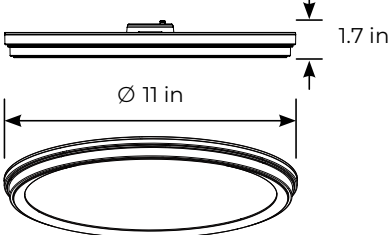

Unit Weight
1.7 lbs.

PLOT




Beam Angle
110°



FMNL | 13” LowPro Ceiling Flush Mount with Nightlight

TWISTFIT MOUNTING SYSTEM | 3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™



KEY FEATURES

Applications: Perfect for multifamily and residential areas, home offices, kitchens, bedrooms and other living spaces.


- **NightLightR™** Nightlight accent trim (2000K)
- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- **TwistFit™** mounting system that easily mounts to existing junction boxes for fast installation
- Retrofit Mounting Kit (E26) and Junction Box options available
- TRIAC dimming down to 10%
- Rated Life (L70) 155,000 Hours



TwistFit™
Mounting
Bracket



NightlightR™
CCT: 2000K
Wattage: 4.5



CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming	Finish
FMNL 13" Ceiling Flush Mount w/Nightlight	13IN	Lumen Pkg. (Nominal/Approx.) 1350LM	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	WT White

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Trim Color	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FMNL-13IN-1350LM-8-CP3-SV-TD-WT	56576111	White	4	100W	17W	1688-1792	3000K 4000K 5000K	80+	120V	TRIAC

ACCESSORIES (Order Separately, Field Install)


Catalog / Part #	Order #	Description
FMLP-RETROFITKIT	95657611101	E26 Adapter with Torsion Springs Kit
FMLP-JBOX	90600760	Junction Box



DIMENSIONS

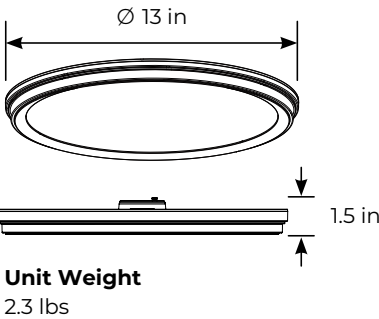


PLOT



FMNL | 32” Oval Flush Mount with Nightlight

TWISTFIT MOUNTING SYSTEM | 3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™



KEY FEATURES

Applications: Perfect for residential areas, home offices, kitchens and other living spaces.

- **NightLightR™** Nightlight accent trim (2000K)
- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- Ultra-thin 1.29” surface profile
- Surface Mounting Kit included, Hardwire install
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours



NightlightR™
CCT: 2000K
Wattage: 4.5




CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Voltage	Dimming	Finish
FMNL 32" Oval Flush Mount w/Nightlight	32IN 32" X 18" Oval	Lumen Pkg. (Nominal/Approx.) 3000LM	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	BN Brushed Nickel


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Trim Color	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FMNL-32IN-3000LM-8-CP3-SV-TD-BN	56587114	Brushed Nickel	2	200W	38W	3164-3304	3000K 4000K 5000K	80+	120V	TRIAC

DIMENSIONS

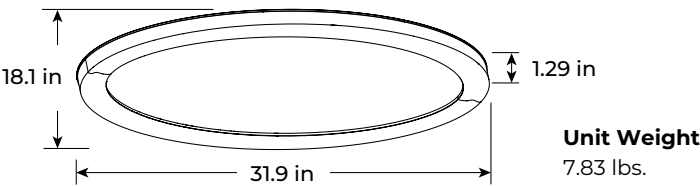

PLOT



Decorative Orbit Round Flush Mounts

TWISTFIT MOUNTING SYSTEM | 3 CCT COLOR PREFERENCE®



KEY FEATURES

- Applications: Perfect for residential areas, home offices, kitchens and other living spaces.
- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
 - **TwistFit™** mounting system that easily mounts to existing junction boxes for fast installation
 - Retrofit Mounting Kit (E26) and Junction Box options available
 - TRIAC dimming down to 10%
 - Rated Life (L70) >50,000 Hours



CATALOG LOGIC


Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming
FMNL Decorative Orbit Flush Mount	11IN 15IN	Lumen Pkg. (Nominal/Approx.) 1000LM 1600LM	8 80+ CRI	3CP 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FMNL-11IN-1000LM-8-3CP-SV-TD	564101120	11" Decorative Orbit	2	75W	14W	1073 –1138	3000K 4000K 5000K	80+	120V	TRIAC
FMNL-15IN-1600LM-8-3CP-SV-TD	564111120	15" Decorative Orbit	2	100W	22W	1404 –1602				

* External BBU options available on 11" model. See ETISSL.com for details.

DIMENSIONS

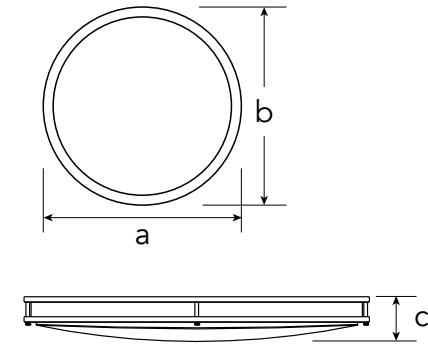

PLOT



Model	a	b	c	weight (lbs)
11 Inch	11"	11"	3.57"	1.74
15 Inch	15"	15"	4.3"	2.55



Decorative Orbit Oval Flush Mount

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

- Applications: Ideal for kitchens, pantries, bedrooms, bathrooms, closets, stairways, storage rooms, multifamily, general hallways and corridors and more
- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
 - Hardwire install—wire connectors, mounting screws and drywall anchors included
 - TRIAC dimming down to 10%
 - Rated Life (L70) 175,000 Hours



32" Oval

CATALOG LOGIC


Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming
FMNL Decorative Orbit Flush Mount	32IN	Lumen Pkg. (Nominal/Approx.) 3000LM	8 80+ CRI	3CP 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FMNL-32IN-3000LM-8-3CP-SV-TD	564121120	32" Decorative Orbit	2	125W	42W	2760 – 3025	3000K 4000K 5000K	80+	120V	TRIAC

* External BBU options available on 11" model. See ETISSL.com for details.

DIMENSIONS

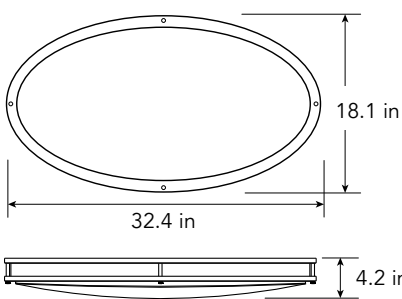

PLOT



Unit Weight
7.7 lbs





FM | 24" Round Flush Mount

REVA STEPPED LENS | 4000K | 120V | TRIAC DIMMING

KEY FEATURES

Applications: Ideal for residential and multifamily areas, kitchens, bedrooms, bathrooms, hallways, basements and other living spaces. Great for task lighting.

- Durable, shatter-proof acrylic impact-resistant lens
- Traditional, versatile fixture with reva stepped lens
- Hardwire install
- Mount with included electrical box screws
- 4000K, 80+ CRI
- Rated Life (L70) 50,000 Hours



CATALOG LOGIC


Series	Diameter	Wattage	CRI / CCT	Voltage	Dimming
FM 7" Ceiling Flush Mount	24 24"	Lumen Pkg. (Nominal/Approx.) 40 (405W, 2900 lm)	840 80+ CRI 4000K 840 80+ CRI 4000K	SV Single Volt 120V	D-E TRIAC Dimming

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FM-24-40-840-SV-D-E	54614242	24" Round Flush Mount	2	300W	40W	3566	4000K	80+	120V	TRIAC


* External BBU options available. See ETISSL.com for details.

DIMENSIONS

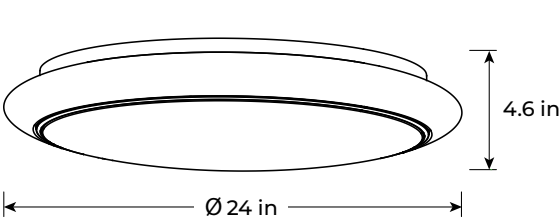

Unit Weight
4.3 lbs.

PLOT



Beam Angle
120°



FM | 16" Round Cloud Flush Mount with Battery Backup

SMOOTH LENS | 3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING



KEY FEATURES

Applications: Ideal for residential or commercial applications. Use in offices, hallways, foyers, utility work areas and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- Integrated Li-ion battery back up unit:
24 hr. recharge time | 1.5 hr. run time
- Drywall / stud mounting screws included
- Modern dome shaped ceiling light with white durable PC diffuser/lens
- Rated Life (L70) 111,000 Hours




CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming	BBU
FM Decorative Orbit Flush Mount	16IN	Lumen Pkg. (Nominal/Approx.) 1600LM	9 90+ CRI	CP3 3000K 4000K 5000K	MV Single Volt 120V	LVD 0-10V Dim	EM Battery Backup

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FM-16IN-1600LM-9-CP3-MV-LVD-EM	54437611	16" Round Cloud Flush Mount with BBU	4	27W in all	1709-2033	3000K 4000K 5000K	90+	120-277V	0-10V Dimming
				22W Luminaire					
				5W BBU					

DIMENSIONS

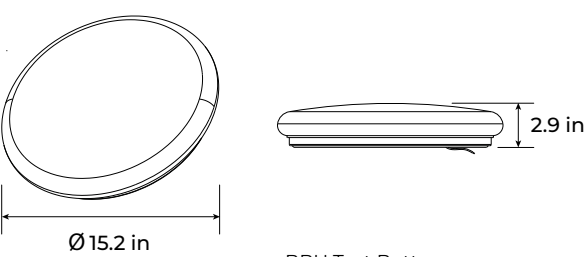


Unit Weight
2.11 lbs.

BBU Test Button

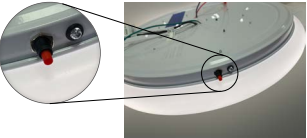

PLOT



Beam Angle
123°



Integrated Li-ion
Battery Backup
4W Output Power
15-50VDC



FM | Low Profile Round Cloud Flush Mounts

SMOOTH LENS | 3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING



KEY FEATURES

Applications: These JA8 Title 24 Compliant luminaires are ideal for residential or commercial applications. Use in offices, hallways, foyers, utility work areas and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- 90+ CRI
- Durable, shatter-proof acrylic impact-resistant lens
- Hardwire install, wire connectors included
- Mount with included 1” mounting screws
- Rated Life (L70) >60,000 – >72,000 Hrs.



CATALOG LOGIC


Series	Diameter	Wattage	CRI / CCT	Voltage	Dimming	Sensor
FM Ceiling Flush Mount	12 (12")	Lumen Pkg. (Nominal/Approx.) 10 (10W, 1000 lm)	902 90+ CRI 3000K 4000K 5000K	MV Multi-Volt 120-277V	D-B 0-10V Dimming	OS Internal OC Sensor
	16 (16")	16 (16W, 1600 lm)				

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FM-12-10-902-MV-D-B	54436511	12” Round Cloud	2	75W	10W	1023 –1196	3000K 4000K 5000K	90+	120-277V	0-10V
FM-16-16-902-MV-D-B	54437511	16” Round Cloud	2	100W	16W	1404 –1601				
FM-16-16-902-MV-D-B-OS	54437511-I	16” Round Cloud with Internal Occupancy Sensor	2	100W	16W	1404 –1601				


* External BBU options available. See ETISSL.com for details.

DIMENSIONS

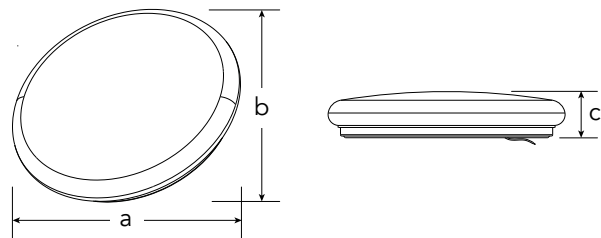

Model	a	b	c	weight (lbs)
12 Inch	12.7”	12.6”	3.2”	1.3
16 Inch	16.6”	16.5”	3.2”	2.1

PLOT



Beam Angle
120°

FM | Low Profile Round Cloud Flush Mounts

SMOOTH LENS | SINGLE CCT | 120-277V | NON-DIMMABLE

KEY FEATURES

Applications: Ideal for residential and multifamily areas, Ideal for kitchens, bedrooms, bathrooms, hallways, basements and other living spaces. Great for task lighting.

- 2700K or 4000K single CCT options, 80+ CRI
- Durable, shatter-proof acrylic impact-resistant lens
- Hardwire install, wire connectors included
- Mount with included 1” mounting screws
- Rated Life (L70) 50,000 Hours



CATALOG LOGIC


Series	Diameter	Wattage	CRI / CCT	Voltage	Dimming
FM Ceiling Flush Mount	12 (12")	Lumen Pkg. (Nominal/Approx.) 14 (14W, 1000 lm)	840 80+ CRI / 4000K 827 80+ CRI / 2700K	MV Multi-Volt 120-277V	N-B Non-Dim
	16 (16")	22 (22W, 1500 lm)			

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FM-12-14-827-MV-N-B	54436201	12” Round Cloud, 2700K	6	75W	14W	980	2700K	80+	120-277V	Non-Dim
FM-12-14-840-MV-N-B	54436241	12” Round Cloud, 4000K	6	75W	14W	1150	4000K	80+	120-277V	Non-Dim
FM-16-22-827-MV-N-B	54437201	16” Round Cloud, 2700K	4	100W	22W	1520	2700K	80+	120-277V	Non-Dim
FM-16-22-840-MV-N-B	54437241	16” Round Cloud, 4000K	4	100W	22W	1667	4000K	80+	120-277V	Non-Dim


* External BBU options available. See ETISSL.com for details.

DIMENSIONS

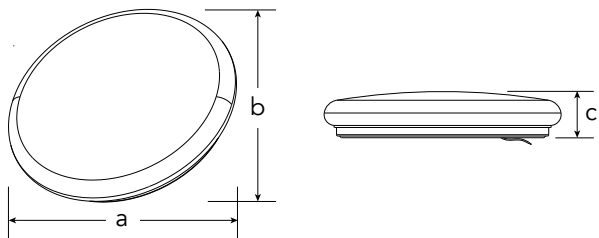

Model	a	b	c	weight (lbs)
12 Inch	11.4”	11.4”	2.9”	1.1
16 Inch	15.4”	15.4”	2.9”	1.8

PLOT



Beam Angle
120°



FM | 10" Flush Mount With Pull Chain

4000K | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Ideal for residential and multifamily areas, Ideal for kitchens, bedrooms, bathrooms, hallways, basements and other living spaces. Great for task lighting.

- **TwistFit™** mounting system that easily mounts to existing junction boxes for fast installation
- Polycarbonate diffuser lens for zero pixelation and overall visual comfort
- 4000K, 80+ CRI
- Rated Life (L70) 50,000 Hours




CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage
FM 10" Ceiling Flush Mount with Pull Chain	10IN	Lumen Pkg. (Nominal/Approx.) 900LM	8 80+ CRI	40K 4000K	SV Single Volt 120V


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
FM-10IN-900LM-8-40K-SV	564221430	10" Flush Mount with Pull Chain	4	75W	12W	1193	4000K	80+	120V	TRIAC

DIMENSIONS

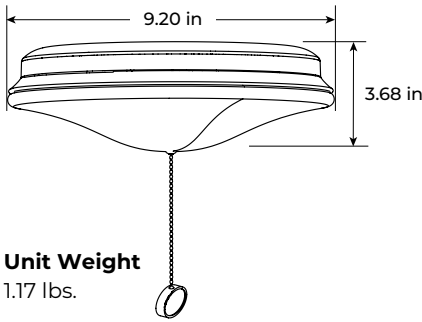

PLOT



UTRD | UTRDP | Universal Round Utility Light – Keyless Light Fixtures

4000K | 120V | NON-DIMMABLE

KEY FEATURES

Applications: Ideal for residential, multifamily and small office areas, utility rooms, pantries, basements and more.

- Light weight, ~ 1/4 lb.
- Direct wire utility light, with or without pull chain
- Mounting screws and wire connectors included
- 4000K, 80+ CRI
- Rated Life (L70) 111,000 Hours




CATALOG LOGIC

Series	Diameter	CRI	CCT	Voltage	Finish
UTRD 5" Round Utility Light	5IN	8 80+ CRI	40K 4000K	SV Single Volt 120V	WT White
UTRDP 5" Round Utility Light with Pull Chain					

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
UTRD-5IN-8-40K-SV-WT	564212420	5" Round Utility Light, 650 lumen package	6	7W	784	4000K	80+	120V	Non-Dim
UTRDP-5IN-8-40K-SV-WT	564211420	5" Round Utility Light with pull chain and ETi Finial, 650 lumen package	6	7W	732	4000K	80+	120V	Non-Dim

DIMENSIONS

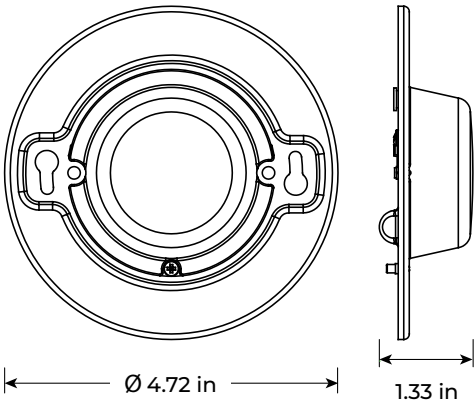

Unit Weight
With Pull Chain: 0.26 lb.
No Pull Chain: 0.23 lb.

PLOT





UTTL | 4" Compact Utility Light, 6-Pack

4000K | 120V | NON-DIMMABLE

KEY FEATURES

Applications: Ideal for tight or challenging mounting spaces, ETI's 4" Universal Round Utility Lights deliver high light output in a compact form—perfect for closets, utility rooms, pantries, and more. Packaged in a convenient 6-pack with quick connectors for easy, efficient installation.

- Great for tight spaces—4.25" dia. and 0.55" profile height
- Light weight, only 0.22 lb.
- Direct wire utility light
- 4000K, 80+ CRI
- Rated Life (L70) > 72,000 Hours




CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming	Trim	Pack Size
UTTL	4IN	Lumen Pkg. (Nominal/Approx.) 850LM	8 80+ CRI	40K 4000K	SV Single Volt 120V	N Non-Dim	WT White	6PK


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
UTTL-4IN-850LM-8-40K-SV-N-WT-6PK	C01003601A	4" Round Utility Light	24	60W	8.5W	882	4000K	80+	120V	Non-Dim

DIMENSIONS

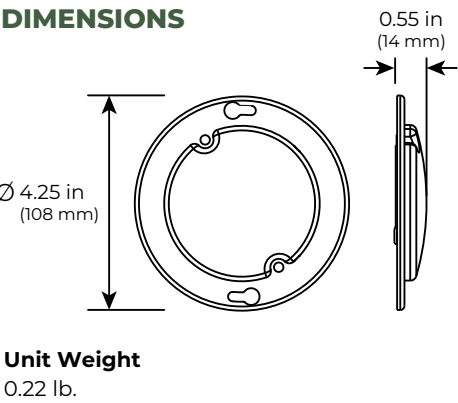

PLOT



UTRDS | 5" Universal Round Utility – Keyless Light Fixture


WITH PIR OCCUPANCY SENSOR | 4000K | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Ideal for residential, multifamily and small office areas, utility and storage areas, pantries, laundry rooms, basements and more.

- **Integrated PIR occupancy sensor** with 3 hold times: 1 min | 5 min | disable
- Maximum sensing angle: 110°
- Replaces a 60W incandescent bulb
- Direct wire utility light
- Mounting screws and wire connectors included
- 4000K, 80+ CRI
- Rated Life (L70) > 72,000 Hours

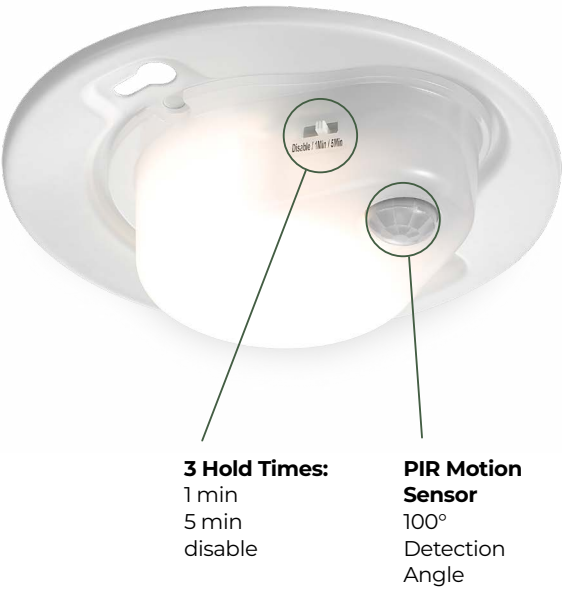


CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming	Trim	Sensor
UTRDS	10IN	Lumen Pkg. (Nominal/Approx.) 650LM	8 80+ CRI	40K 4000K	SV Single Volt 120V	N Non-Dim	WT White	OS OC Sensor


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
UTRDS-5IN-650LM-8-40K-SV-N-WT-OS	564213411	5" Universal Round Utility Light	6	60W	7W	665	4000K	80+	120V	Non-Dim

DIMENSIONS

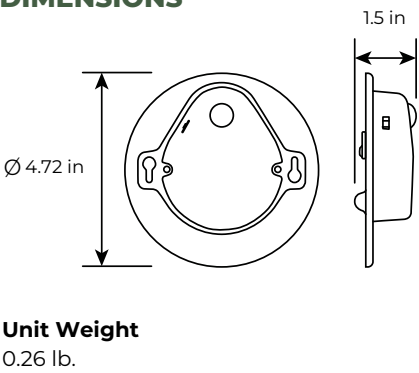

PLOT



SPIN LIGHTS



Install in Seconds

Twist this E26 base luminaire to convert any bare lamp holder into an attractive LED Flush Mount!



For J-Box Install

SpeedMount® Bracket Accessory

SpeedMount® converts your junction box into lamp holder.

SL | 7" Spin Lights®

3 CCT COLOR PREFERENCE® | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Ideal for residential and multifamily areas, home offices, bedrooms, hallways, bathrooms, closets, office storage areas, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- **Spin Light®** easily installs into any bare E26 lamp holder
- SpeedMount® accessory included for J-Box mounting
- Rated Life (L70) >50,000 Hours



Pull Chain

Integrated PIR Motion Sensor


CATALOG LOGIC

Series	Diameter	CRI / CCT	Voltage	Dimming	OR	
SL Spin Light Flush Mount	7 7IN (7")	8CP3 80+ CRI / 3000K 4000K 5000K	SV Single Volt 120V	N Non-Dim	Pull Chain PC Pull Chain	Sensor OS PIR OC Sensor

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
SL-7IN-8CP3-SV-N	C02002403D	7" Spin Light®	5	60W	10.5W	977 -1061	3000K 4000K 5000K	80+	120V	Non-Dim
SL-7-8CP3-SV-N-PC	C02003402A	7" Spin Light® with pull chain	5	60W	10.5W	871 -901				
SL-7-8CP3-SV-N-OS	C02001402A	7" Spin Light® with PIR Motion Sensor	5	60W	10.5W	871 -901				

DIMENSIONS

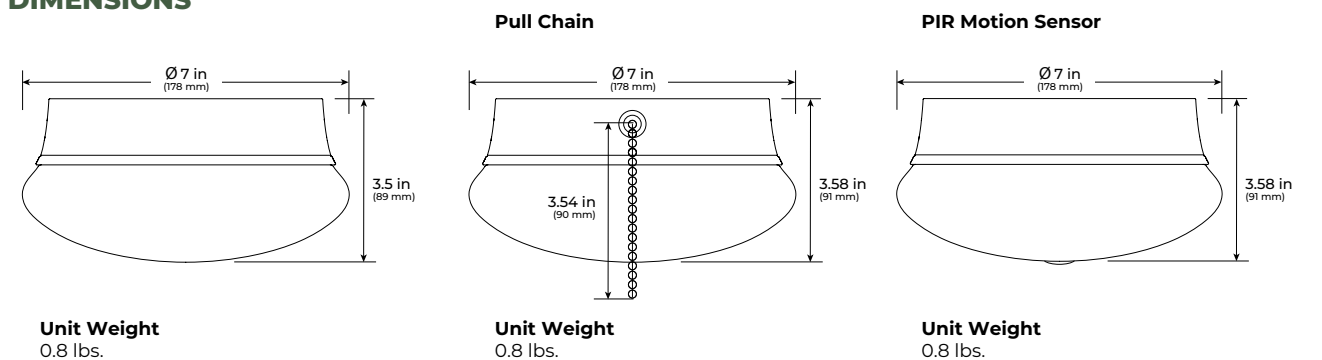




SL | 7" Spin Lights®
4000K | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Ideal for residential and multifamily areas, home offices, bedrooms, hallways, bathrooms, closets, office storage areas, and more.

- Spin Light® easily installs into any bare E26 lamp holder
- SpeedMount® accessory included for J-Box mounting
- 4000K, 80+ CRI
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Diameter	Lumens	CRI / CCT	Voltage	Dimming
SL Spin Light Flush Mount	7 (7")	Lumen Pkg. (Nominal/Approx.) 83 (830 lm)	840 80+ CRI / 4000K	SV Single Volt 120V	N Non-Dim

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
SL-7-83-840-SV-N	54483141	7" Spin Light®	5	60W	11.5W	879	4000K	80+	120V	Non-Dim

DIMENSIONS

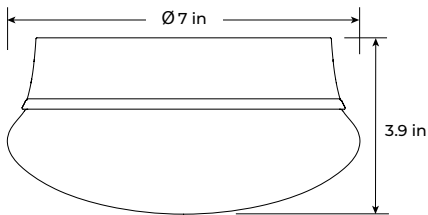

Unit Weight
0.7 lb.

PLOT




SL | 7" High Output Adjustable Tri-Panel Spin Light®
4000K | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Ideal for residential and multifamily areas, home offices, bedrooms, hallways, bathrooms, utility rooms, office storage areas, and more.

- Spin Light® easily installs into any bare E26 lamp holder
- SpeedMount® accessory included for J-Box mounting
- 3 independent panels to direct light where desired
- 4000K, 80+ CRI
- Rated Life (L70) >54,000 Hours



CATALOG LOGIC

Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming
SL HO Tri-Panel Spin Light	7IN	Lumen Pkg. (Nominal/Approx.) 3500	8 80+ CRI	40K 4000K	SV Single Volt 120V	N Non-Dim


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
SL-7IN-3500LM-8-40K-SV-N	566011420	7" High Output Tri-Panel Spin Light®	2	30W	3670	4000K	80+	120V	Non-Dim



3 independent panels
to direct light where desired

DIMENSIONS

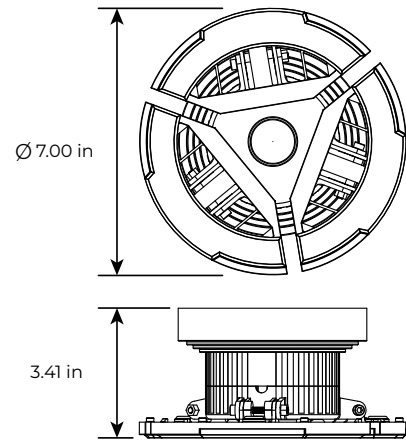

Unit Weight
1.0 lb.

High Lumen Level and Energy Savings
Brilliant light output plus over 50% energy savings compared to CFL lamps





SL | 5" Spin Light®
4000K | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Ideal for residential and multifamily areas, home offices, bedrooms, hallways, bathrooms, closets, office storage areas, and more.

- **Spin Light®** easily installs into any bare E26 lamp holder
- SpeedMount® accessory included for J-Box mounting
- Very light weight, just over 1/2 pound
- 4000K, 80+ CRI
- Rated Life (L70) >50,000 Hours



CATALOG LOGIC


Series	Diameter	Wattage	CRI / CCT	Voltage	Dimming
SL Spin Light Flush Mount	5 (5")	Lumen Pkg. (Nominal/Approx.) 8 (8.5W, 600 lm)	840 80+ CRI / 4000K	SV Single Volt 120V	N Non-Dim

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
SL-5-8-840-SV-N	54692142	5" Spin Light®	5	40W	8.5W	686	4000K	80+	120V	Non-Dim


* External BBU options available. See ETISSL.com for details.

DIMENSIONS

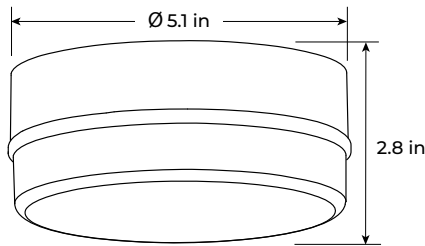

Unit Weight
0.6 lb.

PLOT



Beam Angle
120°

SL | 11" Spin Light®
4000K | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Ideal for residential and multifamily areas, home offices, bedrooms, hallways, bathrooms, closets, office storage areas, and more.

- **Spin Light®** easily installs into any bare E26 lamp holder
- SpeedMount® accessory included for J-Box mounting
- 4000K, 80+ CRI
- Rated Life (L70) >60,000 Hours




CATALOG LOGIC

Series	Diameter	Lumens	CRI / CCT	Voltage	Dimming
SL Spin Light Flush Mount	11 (11")	Lumen Pkg. (Nominal/Approx.) 16 (1600 lm)	840 80+ CRI / 4000K	SV Single Volt 120V	N Non-Dim

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
SL-11-16-840-SV-N	54652141	11" Spin Light®	4	100W	22W	1611	4000K	80+	120V	Non-Dim

DIMENSIONS

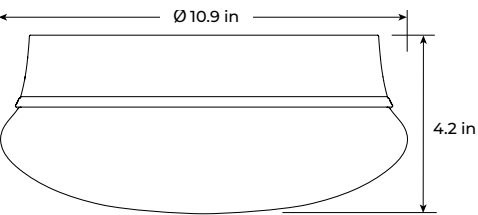

Unit Weight
1.3 lbs.

PLOT



Beam Angle
120°

Beam Angle
120°





FLUSH MOUNTS

LINEAR

PVLFM | Pivot Series Linear Flush Mounts


3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Built for versatility, the Pivot Linear Flush Mount Series is ideal for residential settings such as kitchens, hallways, home offices, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours

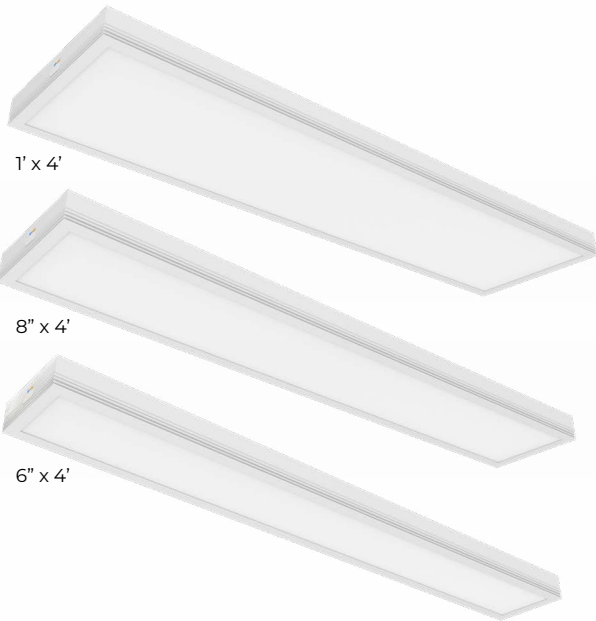


CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming	Finish
PVLFM Pivot Linear Flush Mount	06 (6" W) 08 (8" W) 012 (12" W)	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	WH White

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
PVLFM-06-8CP3-SV-TD-WH	C05021401A	Pivot Linear Flush Mount 6" x 4'	2	40W	2771 – 3058	3000K 4000K 5000K	80+	120V	TRIAC
PVLFM-08-8CP3-SV-TD-WH	C05022401A	Pivot Linear Flush Mount 8" x 4'	2	50W	3643 – 3927				
PVLFM-12-8CP3-SV-TD-WH	C05023401A	Pivot Linear Flush Mount 1' x 4'	2	55W	4172 – 4501				

DIMENSIONS

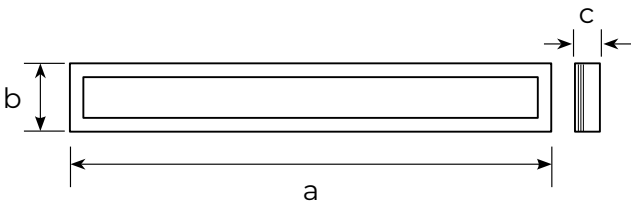

Model	a	b	c	weight (lbs)
6" X 46"	46"	6.2"	2.0"	5.2
8" X 46"	46"	8.0"	2.0"	6.1
12" X 46"	46"	12.0"	2.0"	7.5

PLOT



MOUNTING



Includes Quick Fit Installation Kit: Simply mount the bracket to the ceiling and slide the fixture into place.

ESLFM | Essex Linear Flush Mount


3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™ | 120V | TRIAC DIMMING



KEY FEATURES

Applications: A stylish lighting solution for residential spaces, the Essex Flush Mount features a walnut finish with black corner accents—adding a warm, functional touch to living rooms, bedrooms, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- **NightLightR™** Nightlight accent trim (2000K)
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours

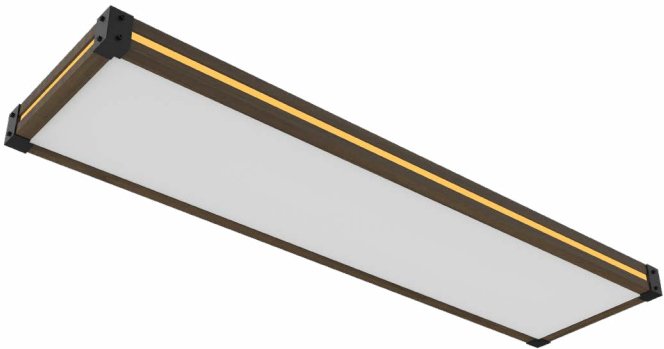


CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming	Finish
ESLFM Essex Linear Flush Mount	13 (13"W)	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	WN Walnut

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
ESLFM-13-8CP3NL-SV-TD-WN	C05009401A	Essex Linear Flush Mount with Nightlight, 4' x 13"	2	55W	4545 – 4890	3000K 4000K 5000K	80+	120V	TRIAC

DIMENSIONS

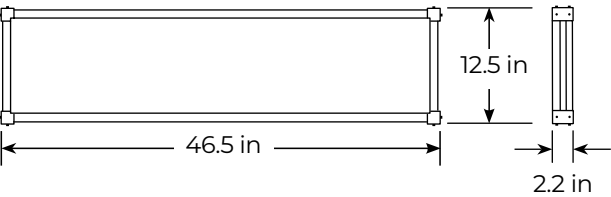

Unit Weight
8.3 lbs.

PLOT



MOUNTING



Includes Quick Fit Installation Kit: Simply mount the bracket to the ceiling and slide the fixture into place.

RTLFM | Rutland Linear Flush Mount

3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™ | 120V | TRIAC DIMMING



KEY FEATURES

Applications: With its modern farmhouse charm, the Rutland Flush Mount adds style and warmth to residential spaces—perfect for entryways, kitchens, bedrooms, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- **NightLightR™** Nightlight accent trim (2000K)
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours



CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming	Finish
RTLFM Essex Linear Flush Mount	13 (13"W)	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	WH White

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
RTLFM-13-8CP3NL-SV-TD-WH	C05008402A	Rutland Linear Flush Mount with Nightlight, 4' x 13"	2	55W	4137 – 4631	3000K 4000K 5000K	80+	120V	TRIAC

DIMENSIONS



Unit Weight
9.0 lbs.

PLOT



MOUNTING



Includes Quick Fit Installation Kit: Simply mount the bracket to the ceiling and slide the fixture into place.



RDLFM | Runden Series Linear Flush Mounts

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Sleek and versatile, the Runden Linear Flush Mount Series offers a clean, modern look—ideal for residential spaces like walk-in closets, kitchen islands, hallways, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming	Finish
RDLFM Runden Linear Flush Mount	06 (6"W) 12 (12"W)	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	BL Black WH White

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
RDLFM-06-8CP3-SV-TD-BL	C05015402A	Runden Linear Flush Mount 6" x 4', Black	2	40W	3137 – 3395	3000K 4000K 5000K	80+	120V	TRIAC
RDLFM-06-8CP3-SV-TD-WH	C05015401A	Runden Linear Flush Mount 6" x 4', White	2	40W	3210 – 3351				
RDLFM-12-8CP3-SV-TD-BL	C05016402A	Runden Linear Flush Mount 1' x 4', Black	2	55W	4488 – 4781				
RDLFM-12-8CP3-SV-TD-WH	C05016401A	Runden Linear Flush Mount 1' x 4', White	2	55W	4484 – 4839				

DIMENSIONS

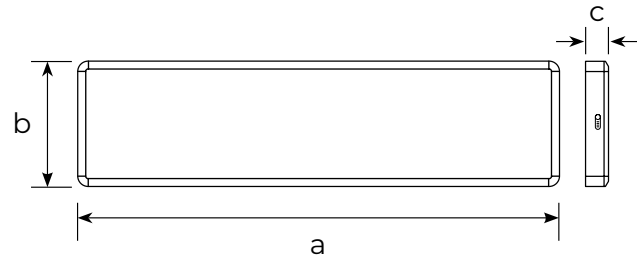

Model	a	b	c	weight (lbs)
6" X 46"	46"	6.2"	2.2"	4.6
1' X 46"	46"	12.0"	2.2"	7.0

PLOT



MOUNTING



Includes Quick Fit Installation Kit: Simply mount the bracket to the ceiling and slide the fixture into place.

VTLFM | Vermont Series Linear Flush Mounts

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Available in two stylish finishes—White with Walnut Trim and Black with Oak Trim—these Linear Flush Mounts are perfect for residential spaces including walk-in closets, kitchen islands, hallways, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming	Finish
VTLFM Vermont Linear Flush Mount	12 (12"W)	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	BL Black WH White

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
VTLFM-12-8CP3-SV-TD-WH	C05006402A	Vermont Linear Flush Mount 1' x 4', White with Walnut Finish	2	55W	4472 – 4796	3000K 4000K 5000K	80+	120V	TRIAC
VTLFM-12-8CP3-SV-TD-BL	C05006401A	Vermont Linear Flush Mount 1' x 4', Black with Oak Finish	2	55W	4361 – 4653				

DIMENSIONS

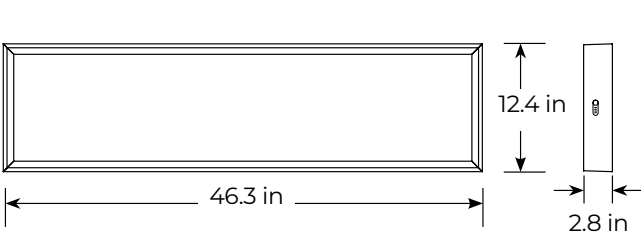

Unit Weight
8.5 lbs.

PLOT



MOUNTING



Includes Quick Fit Installation Kit: Simply mount the bracket to the ceiling and slide the fixture into place.



WNLFM | Wellen Series Linear Flush Mounts

3 CCT COLOR PREFERENCE® | NIGHTLIGHTR™ | 120V | TRIAC DIMMING



KEY FEATURES

Applications: With a sleek, modern design that complements any décor, Wellen Linear Flush Mounts are ideal for residential spaces like kitchens, hallways, home offices, and more.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- **NightLightR™** Nightlight accent trim (2000K)
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming	Finish
WNLFM Wellen Linear Flush Mount	06 (6"W) 12 (12"W)	8 80+ CRI	CP3 3000K 4000K 5000K CP3NL W/ 2000K NL	SV Single Volt 120V	TD TRIAC	WH White

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
WNLFM-06-8CP3-SV-TD-WH	C05013401A	Wellen Linear Flush Mount 6" x 4'	2	40W	3395 – 3555	3000K 4000K 5000K	80+	120V	TRIAC
WNLFM-06-8CP3NL-SV-TD-WH	C05012401A	Wellen Linear Flush Mount 6" x 4', with Night Light	2	40W	3395 – 3555				
WNLFM-12-8CP3-SV-TD-WH	C05010401A	Wellen Linear Flush Mount 1' x 4'	2	55W	4621 – 4922				
WNLFM-12-8CP3NL-SV-TD-WH	C05011401A	Wellen Linear Flush Mount 1' x 4', with Night Light	2	55W	4206 – 4695				

DIMENSIONS

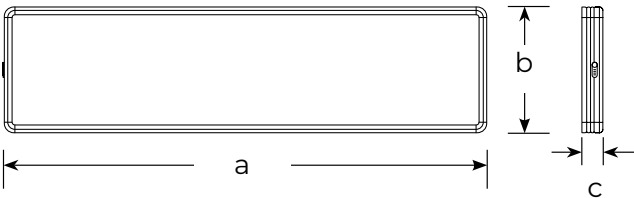

Model	a	b	c	weight (lbs)
6" X 46"	46"	6.2"	2.0"	4.6
1' X 46"	46"	12.4"	2.0"	7.5

PLOT



MOUNTING



Includes Quick Fit Installation Kit: Simply mount the bracket to the ceiling and slide the fixture into place.

RVLFM | Revol Series Linear Flush Mounts

3 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Featuring a modern industrial design, Revol Linear Flush Mounts are a great fit for residential spaces such as lofts, kitchens, hallways, and other contemporary interiors.

- **Color Preference®** Select from 3 CCTs (3000K, 4000K, 5000K)
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.
- TRIAC dimming down to 10%
- Rated Life (L70) >50,000 Hours




CATALOG LOGIC

Series	Size	CRI	CCT	Voltage	Dimming	Finish
RVLFM Revol Linear Flush Mount	08 (08"W) 12 (12"W)	8 80+ CRI	CP3 3000K 4000K 5000K	SV Single Volt 120V	TD TRIAC	BL Black

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
RVLFM-08-8CP3-SV-TD-BL	C05019401A	Revol Linear Flush Mount 8" x 4'	2	50W	3554 – 3901	3000K 4000K 5000K	80+	120V	TRIAC
RVLFM-12-8CP3-SV-TD-BL	C05018401A	Revol Linear Flush Mount 1' x 4'	2	55W	4136 – 4428				

DIMENSIONS

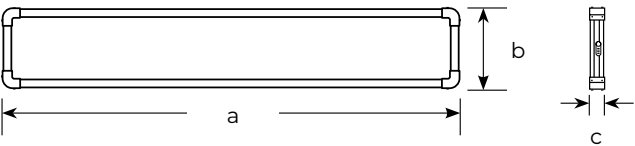

Model	a	b	c	weight (lbs)
8" X 46"	46"	8.1"	2.3"	6.1
1' X 46"	46"	12.2"	2.3"	7.9

PLOT



MOUNTING



Includes Quick Fit Installation Kit: Simply mount the bracket to the ceiling and slide the fixture into place.





CL | Ceiling Lights – Linear Flush Mount

REVA STEPPED LENS | 4000K | 120V | TRIAC DIMMING

KEY FEATURES

Applications: Ideal for residential or multifamily facilities and more. Use in kitchens, laundry rooms, basements, storage rooms, hallways, lobbies, warehouse offices

- Durable, shatter-proof acrylic impact-resistant lens
- Basic, versatile fixture with reva stepped lens
- Hardwire install
- Mount with included electrical box screws
- 4000K, 80+ CRI
- Rated Life (L70) 50,000 Hours



CATALOG LOGIC


Series	Size	Wattage Lumen Pkg. (Nominal/Approx.)	CRI / CCT	Voltage	Dimming
CL Ceiling Light Linear Flush Mount	14 1' X 4'	40 (40W, 3000 lm)	840 80+ CRI 4000K	SV Single Volt 120V	D-G TRIAC Dimming
	14 1.5' X 4'	75 (75W, 5500 lm)			

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
CL-14-40-840-SV-D-G	54647142	1' X 4' Linear Flush Mount with Reva Step Lens	1	64W T8	40W	3238	4000K	80+	120V	TRIAC
CL-14-75-840-SV-D-G	54649142	1.5' X 4' Linear Flush Mount with Reva Step Lens	1	96W T8	75W	5588	4000K	80+	120V	TRIAC


* External BBU options available. See ETISSL.com for details.

DIMENSIONS

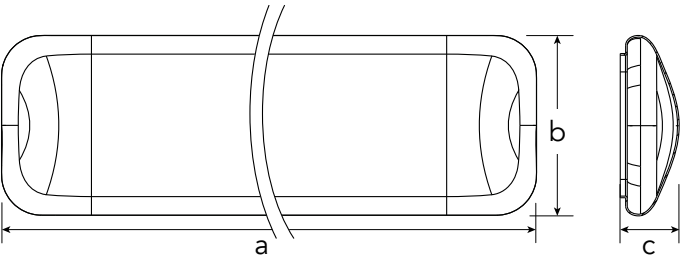

Model	a	b	c	weight (lbs)
1' X 4'	49"	10.2"	3.9"	7.1
1.5' X 4'	49"	17.3"	3.9"	11.9

PLOT



Beam Angle
120°

TL | 20" 3-Head Track Flush Mounts

WITH ROTATING HEADS | 5 CCT COLOR PREFERENCE® | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Perfect for residential areas, home offices, kitchens and other living spaces.

- **Color Preference®** Select from 5 CCTs (2700/3000/3500/4000/5000K)
- Adjustable—each lamp head rotates 360° and tilts to direct light
- Integrated J-Box
- Surface mount kit included
- TRIAC dimming down to 10%
- Rated Life (L70) 54,000 Hours




CATALOG LOGIC

Series	Diameter	Lumens Lumen Pkg. (Nominal/Approx.)	CRI	CCT	Voltage	Trim Color
TL Track Light Flush Mount	20IN	1650LM	8 80+ CRI	CP5 2700/3000/3500/ 4000/5000K	SV Single Volt 120V	W White B Black BN Brushed Nickel


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
TL-20IN-1650LM-8-CP5-SV-W	534011010	20" 3-Head Track Flush Mount, White	18W	1830 – 2119	2700K 3000K 3500K 4000K 5000K	80+	120V	Non-Dim
TL-20IN-1650LM-8-CP5-SV-B	534011020	20" 3-Head Track Flush Mount, Black						
TL-20IN-1650LM-8-CP5-SV-BN	534011030	20" 3-Head Track Flush Mount, Brushed Nickel						

DIMENSIONS

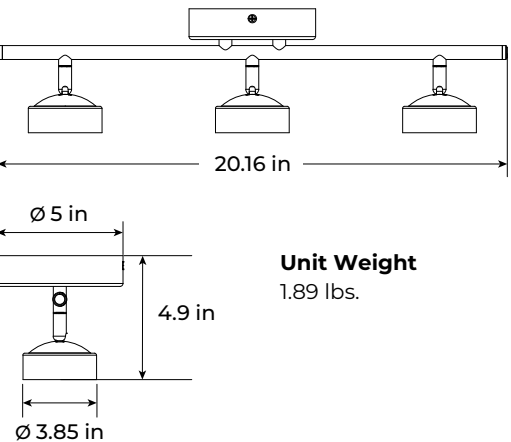

PLOT



Beam Angle
108°

Adjustable Heads




Each head rotates 330° and has a 90° tilt capability.



VLB | 24" LED Vanity Light Bars

5 CCT COLOR PREFERENCE® | 120-277V | NON-DIMMABLE



KEY FEATURES

- Applications: LED Vanity Light Bars are ideal for residential and commercial applications.
- **Color Preference®** Select from 5 CCTs (2700/3000/3500/4000/5000K)
 - Modern sleek design can be mounted vertically or horizontally
 - Direct-wire surface mount kit included
 - Non-Dimmable
 - Rated Life (L70) 54,000 Hours



CATALOG LOGIC

Series	Size	Lumens	CRI	CCT	Dimming	Voltage	Trim Color
VLB Vanity Light Bar	24IN	Lumen Pkg. (Nominal/Approx.) 1650LM	8 80+ CRI	CP5 2700/3000/3500/ 4000/5000K	N Non-Dim	MV Multi-Volt 120-277V	CH Chrome BN Brushed Nickel MB Matte Black

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
VLB-24IN-1650LM-8-CP5-MV-N-CH	537989041	24" Vanity Light Bar, chrome finish	17W	1652 – 1745	2700K	80+	120- 277V	Non- Dim
LB-24IN-1650LM-8-CP5-MV-N-BN	537989051	24" Vanity Light Bar, brushed nickel finish			3000K			
VLB-24IN-1650LM-8-CP5-MV-N-MB	537989061	24" Vanity Light Bar, matte black finish			3500K 4000K 5000K			



VLB | 24" LED Vanity Light Bars

5 CCT COLOR PREFERENCE® | 120-277V | NON-DIMMABLE

MOUNTING




Vertical Mount




Horizontal Mount

Direct Wire Surface Mount included

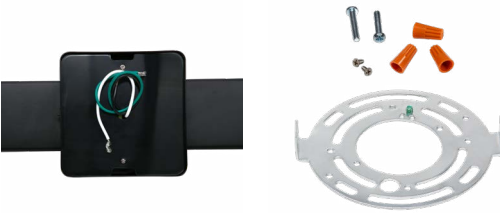

DIMENSIONS

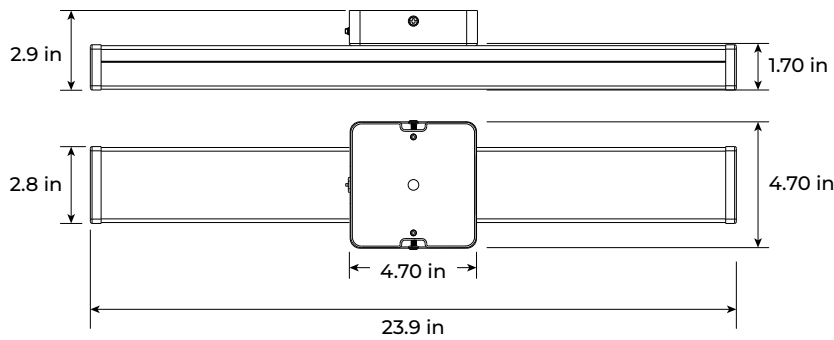

Unit Weight
1.96 lbs.



OUTDOOR



ETI has expanded our outdoor product line to provide more options and convenience for our customers.

Our new outdoor lighting line covers various building and property applications, including flush mounts for gazebos, porches, and other covered areas, wall-mounted lighting, pole lighting, entryway options, parking deck options, and more.



Our growing controls-ready product offering adds convenient solutions, a wide range of lumen packages, selectable wattages and CCTs, and more. We also offer a variety of shields and products with the flexibility for use in Dark Skies initiatives.



FME | 11” Outdoor Flush Mount

TWISTFIT MOUNTING SYSTEM | 5 CCT COLOR PREFERENCE® | 120V | TRIAC DIMMING



KEY FEATURES

Applications: Ideal for porches, pavilions, covered decks/ patios, gazebos and more.

- **Color Preference®** Select from 5 CCTs (2700/3000/3500/4000/5000K)
- **PIR Motion Sensor | Dusk to Dawn** 3 Settings: Motion Mode, Dusk to Dawn (DTD) Mode, and Disable
- **Motion Sensor** Integrated motion sensor—detects at 120°
- **TwistFit™** mounting system that easily mounts to existing junction boxes for fast installation
- TRIAC dimming down to 10%
- Rated Life (L70) 50,000 Hours



CATALOG LOGIC


Series	Diameter	Lumens	CRI	CCT	Voltage	Dimming	Sensor	Finish
FME Flush Mount (Outdoor/Exterior)	11IN	Lumen Pkg. (Nominal/Approx.) 830LM	8 80+ CRI	CP5 2700K 3000K 3500K 4000K 5000K	SV Single Volt 120V	TD TRIAC	OS PIR Motion Sensor with Dusk to Dawn	B Black W White

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Delivered Lumen Range	Wattage (Nominal)	CCT	CRI	Volt.	Dim
FME-11IN-830LM-8-CP5-SV-TD-OS-B	564281030	Outdoor Flush Mount Black Trim	2	60W	898 – 918 lm	11.5W	2700K 3000K 3500K 4000K 5000K	80+	120V	TRIAC
FME-11IN-830LM-8-CP5-SV-TD-OS-W	564281040	Outdoor Flush Mount White Trim								




DIMENSIONS

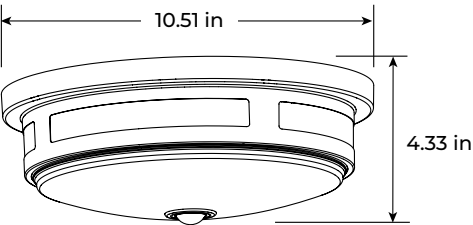

Unit Weight
1.17 lbs.

PLOT



Beam Angle
127°

FME | Outdoor Octagon Flush Mount

3 CCT COLOR PREFERENCE® | 120-277V | Non-Dimmable



KEY FEATURES

This modern fixture offers flexibility and efficiency.
Applications: Ideal for porte cochères, walkways, storage units, and more.

- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- Surface Mounting Kit included, Hardwire install
- Rated Life (L70) 50,000 Hours



CATALOG LOGIC


Series	Lumens	CRI / CCT	Voltage	Dimming	Sensor	Finish
FME Flush Mount (Outdoor/Exterior)	Lumen Pkg. (Nominal/Approx.) 83 830 lm	802 80+ CRI 3 CCT 3000K 4000K 5000K	MV Multi-Volt 120-277V	N Non-Dim	N None	B Black W White

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Delivered Lumen Range	Wattage (Nominal)	CCT	CRI	Volt.	Dim
FME-83-802-MV-N-N-B	54466101	Outdoor Flush Mount Black Trim	6	60W	979 – 1028 lm	12.5W	3000K 4000K 5000K	80+	120-277V	Non-Dim
FME-83-802-MV-N-N-W	54466201	Outdoor Flush Mount White Trim								


* External BBU options available. See ETISSL.com for details.

DIMENSIONS

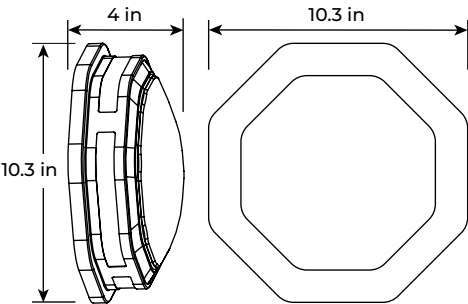

Unit Weight
1.83 lbs.

PLOT



Beam Angle
120°



SCNP | Slim Canopy

3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

The Slim Canopy light has a small footprint and offers sufficient light coverage, helping provide a safe, well-lit environment. Applications: Ideal for parking garages, drive throughs, walk ways and more.

- **Lumen Boost®** Select from 3 lumen levels
- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- Removable plugs for easy access to wattage and CCT select switches
- Universal 120-277 voltage
- 0-10V dimming
- Long Life: rated for > 80,000 hours (L70)




Easy Access
to Wattage & CCT select switches

CATALOG LOGIC


Series	Lumens	Lumen Boost	CCT	Voltage	Dimming	Finish Color
SCNP Slim Canopy	Lumen Pkg. (Nominal/Approx.) 1 3800 – 7600 lm	LB3 3 Lumen Boost® Lumen Pkg #1: 25 40 60W	CP3 3 CCT Color Preference® 3000/4000/5000K	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V	(Leave Blank) Bronze WH White

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Delivered Lumen Range (LB3)	Wattage (Nominal)	CCT	CRI	Volt.	Dim
SCNP-1-LB3-CP3-MV-LVD	60603101	Slim Canopy Bronze Finish	3860 – 7653 lm	25 40 60	3000K 4000K 5000K	80+	120-277V	0-10V
SCNP-1-LB3-CP3-MV-LVD-WH	60603102	Slim Canopy White Finish						

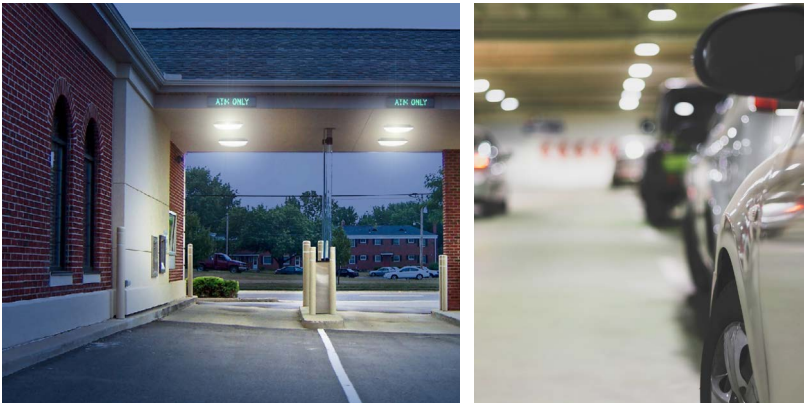

DIMENSIONS

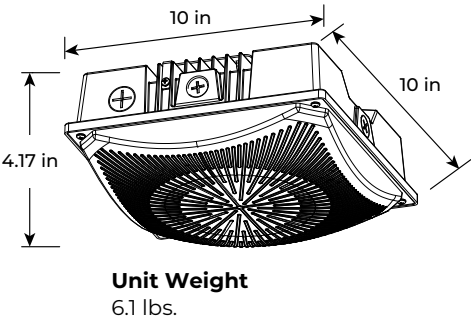

MBRT | 9" Rectangular Marine Bulkhead

3 CCT COLOR PREFERENCE® | 2 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

These luminaires are rugged and corrosion-resistant, making them a great light option for harsh weather conditions. Applications: Ideal for entryways, porches, decks, docks, walkways and more.

- **Lumen Boost®** Select from 2 lumen levels
- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- Surface Mounting Kit included, Hardwire install
- Rated Life (L70) 238,000 Hours



CATALOG LOGIC


Series	Lumen Boost	CCT	CCT	Voltage	Finish Color
MBRT Marine Bulkhead (Rectangular)	Lumen Pkg. (Nominal/Approx.) 2LB 2 Lumen Boost® 100% 50% 11W 5W 1200 lm 600 lm	8 80+ CRI	3CP 3 CCT Color Preference® 3000/4000/5000K	MV Multi-Volt 120-277V	WT White

STOCK ORDERING INFORMATION



Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Delivered Lumen Range	Wattage (Nominal)	CCT	CRI	Volt.	Dim
MBRT-9IN-2LB-8-3CP-MV-WT	504091120	9" Rectangular Marine Bulkhead	2	65W	1387 – 1561 lm	5W 11W	3000K 4000K 5000K	80+	120-277V	Non-Dim

* External BBU options available. See ETISSL.com for details.

DIMENSIONS

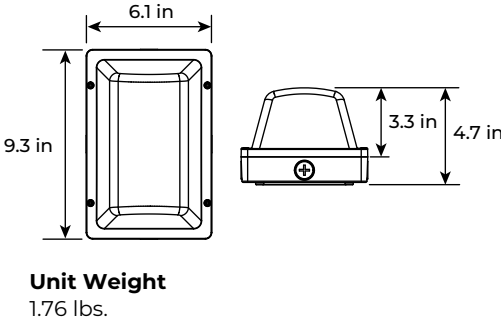

PLOT

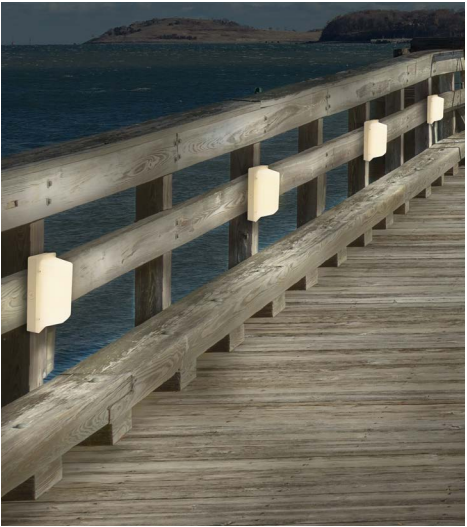

MBOV | 8.5" Oval Marine Bulkhead

3 CCT COLOR PREFERENCE® | 120-277V | NON-DIMMABLE



KEY FEATURES

These luminaires are rugged and corrosion-resistant, making them a great light option for harsh weather conditions. Applications: Ideal for entryways, porches, decks, docks, walkways, pool areas and more.




CATALOG LOGIC

Series	Size	CCT	CCT	Voltage	Finish Color
MBOV Marine Bulkhead (Oval)	8.5IN	8 80+ CRI	3CP 3 CCT Color Preference® 2700/3000/4000K	MV Multi-Volt 120-277V	WT White


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Delivered Lumen Range	Wattage (Nominal)	CCT	CRI	Volt.	Dim
MBOV-8.5IN-8-3CP-MV-WT	504071020	8.5" Oval Marine Bulkhead	2	50W	836 – 903 lm	7W	2700K 3000K 4000K	80+	120-277V	Non-Dim

DIMENSIONS

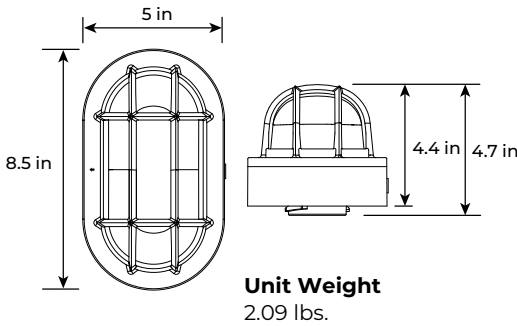

PLOT



MBRD | 8.5" Round Marine Bulkhead

3 CCT COLOR PREFERENCE® | 120-277V | NON-DIMMABLE



KEY FEATURES

These luminaires are rugged and corrosion-resistant, making them a great light option for harsh weather conditions. Applications: Ideal for entryways, porches, decks, docks, walkways, pool areas and more.




CATALOG LOGIC

Series	Size	CCT	CCT	Voltage	Finish Color
MBRD Marine Bulkhead (Round)	8.5IN	8 80+ CRI	3CP 3 CCT Color Preference® 2700/3000/4000K	MV Multi-Volt 120-277V	WT White


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Replaces (Up to)	Delivered Lumen Range	Wattage (Nominal)	CCT	CRI	Volt.	Dim
MBRD-8.5IN-8-3CP-MV-WT	504081020	8.5" Round Marine Bulkhead	2	50W	861 – 955 lm	7W	2700K 3000K 4000K	80+	120-277V	Non-Dim

DIMENSIONS

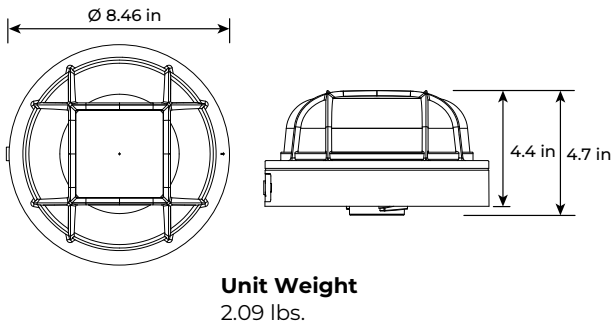

PLOT



VFLL | VersaFlood Large
3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING




KEY FEATURES

Applications: Ideal for site lighting, building facades, small stadium lighting, architectural, security lighting and more.

- **MultiMount** Slipfit Knuckle Mount Pre-installed and Trunnion Mount included
- **Lumen Boost**® Select from 3 lumen levels
- **Color Preference**® Select from 3 CCTs (3000/4000/5000K)
- 18 Lights in One: 3 Selectable Wattages X 3 Selectable CCTs X 2 Mounting Options
- Universal 120-277 voltage and 347-480V options
- 0-10V dimming
- Long Life: rated > 80,000 hours (L70)



MultiMount
Two Mounting
Options Included



CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Voltage	Dimming	Mounting	Controls	SPD
VFLL VersaFlood Large	Lumen Pkg. (Nominal/Approx.)	LB3 3 Lumen Boost®	CP3 3 CCT Color Preference®	MV Multi-Volt 120-277V HV High-Volt 347-480V¹	LVD Low Voltage Dimming 0-10V	MM Multi-Mount (knuckle & trunnion mount in carton)	7PR 7-Pin Receptacle w/ Shorting Cap	SPD10 Factory- installed 10KV Surge Protection² (Leave Blank) No SPD
	1 16000 – 32000 lm	Lumen Pkg #1: 100 150 205W						
	2 24000 – 39000 lm	Lumen Pkg #2: 150 200 255W						
	3 39000 – 50000 lm	Lumen Pkg #3: 250 290 330W						

Notes: 1. 347-480V Made to Order only. Lead times apply.
2. Surge Protection for MV (120-277V) options only. MTO. Lead times apply.



VFLL | VersaFlood Large
3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Delivered Lumen Range (LB3)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim
VFLL-1-LB3-CP3-MV-LVD-MM-7PR	60223101	VersaFlood, Large with Lumen Pkg 1	16281 – 31533	100 150 205	3000K 4000K 5000K	70+	120-277V	0-10V
VFLL-2-LB3-CP3-MV-LVD-MM-7PR	60223201	VersaFlood, Large with Lumen Pkg 2	23665 – 38492	150 200 255				
VFLL-3-LB3-CP3-MV-LVD-MM-7PR	60224101	VersaFlood, Large with Lumen Pkg 3	37374 – 50475	250 290 330				

MADE TO ORDER OPTIONS (Lead times apply)

Catalog / Part #	Order #	Description
VFLL-1-LB3-CP3-MV-LVD-MM-7PR-SPD10	60223101-SPD10	VersaFlood, Large, Lumen Pkg 1, 120-277V with 10KV Surge Protection Device
VFLL-2-LB3-CP3-MV-LVD-MM-7PR-SPD10	60223201-SPD10	VersaFlood, Large, Lumen Pkg 2, 120-277V with 10KV Surge Protection Device
VFLL-3-LB3-CP3-MV-LVD-MM-7PR-SPD10	60224101-SPD10	VersaFlood, Large, Lumen Pkg 3, 120-277V with 10KV Surge Protection Device
VFLL-1-LB3-CP3-HV-LVD-MM-7PR	60223301	VersaFlood, Large, Lumen Pkg 1, 347-480V
VFLL-2-LB3-CP3-HV-LVD-MM-7PR	60223401	VersaFlood, Large, Lumen Pkg 2, 347-480V
VFLL-3-LB3-CP3-HV-LVD-MM-7PR	60224201	VersaFlood, Large, Lumen Pkg 3, 347-480V


Mounting Options:
(Included in package)

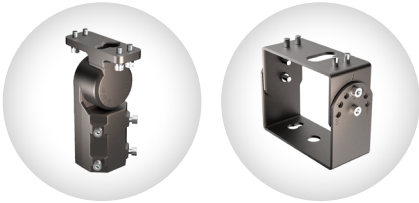

Pre-Installed Slipfit Knuckle Mount Trunnion Mount


ACCESSORIES (Order Separately, Field Install)

Catalog / Part #	Order #	Description
7PR-PC	70218101	7 Pin Receptacle Photocell
7PR-PC-480	70219101	7 Pin Receptacle Photocell 480VAC
VFLL-WG-SM	70541101	VersaFlood Large Wire Guard Size 1 and 2
VFLL-WG-LG	70542101	VersaFlood Large Wire Guard Size 3




Wire Guards

DISTRIBUTION



DIMENSIONS

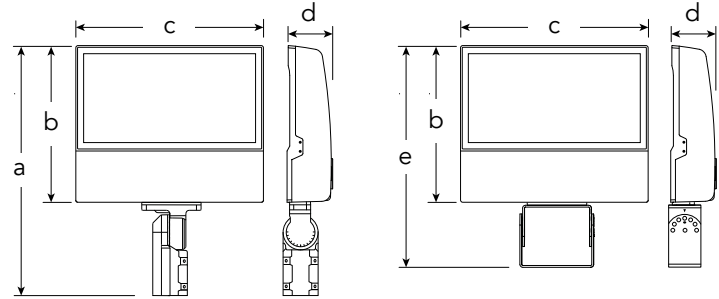

Lumen Pkg.	a	b	c	d	e	weight w/ knuckle	weight w/ trunnion	EPA
1	21"	12.6"	13.9"	3.7"	18.0"	14.8 lbs.	13.7 lbs.	1.4 ft²
2	21"	12.6"	13.9"	3.7"	18.0"	14.8 lbs.	13.7 lbs.	1.4 ft²
3	21.6"	13.5"	16.2"	3.8"	19.1"	17.6 lbs.	16.5 lbs.	1.7 ft²

VFLS | VersaFlood Small
3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

Applications: Ideal for site lighting, building facades, small stadium lighting, architectural, security lighting and more.

- **MultiMount** Slipfit Knuckle Mount Pre-installed and Trunnion Mount included
- **Lumen Boost**® Select from 3 lumen levels
- **Color Preference**® Select from 3 CCTs (3500/4000/5000K)
- **Dusk to Dawn** Photocell w/ enable disable standard
- 18 Lights in One: 3 Selectable Wattages X 3 Selectable CCTs X 2 Mounting Options
- Universal 120-277 voltage
- 0-10V dimming
- Rated Life (L70) Lumen Pkg. 1 & 2 > 100,000hours
Lumen Pkg. 3, 4 & 6 > 90,000 hours
Lumen Pkg. 5 > 85,000 hours



CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Voltage	Dimming	Finish Color	Mounting
VFLS VersaFlood Small	Lumen Pkg. (Nominal/Approx.) 1 2000 lm	(Leave Blank) Lumen Pkg #1: 15W LB3 3 Lumen Boost®	CP3 3 CCT Color Preference® 3000K 4000K 5000K	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V	(Leave Blank) Bronze WH White²	MM Multi-Mount (knuckle & trunnion mount in carton)
	2 1900 – 4900 lm	Lumen Pkg #2 15 25 35W					
	3 4500 – 8400 lm	Lumen Pkg #3 35 45 60W					
	4 5900 – 11200 lm	Lumen Pkg #4 45 60 80W					
	5 10500 – 16800 lm	Lumen Pkg #5 80 100 120W					
	6 13000 – 21750 lm	Lumen Pkg #6 100 120 150W					

Notes: 1. White available for Lumen Packages 1, 2 & 3 only



VFLS | VersaFlood Small
3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Delivered Lumen Range (LB3)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim
VFLS-1-CP3-MV-LVD-MM	60218101	VersaFlood, Small, Bronze Lumen Pkg 1	1992 – 2184 (single)	15	3000K 4000K 5000K	80+	120-277V	0-10V
VFLS-1-CP3-MV-LVD-WH-MM	60218102	VersaFlood, Small, White Lumen Pkg 1	1992 – 2184 (single)					
VFLS-2-LB3-CP3-MV-LVD-MM	60219101	VersaFlood, Small, Bronze Lumen Pkg 2	2428 – 4772	35 25 15	3000K 4000K 5000K	80+	120-277V	0-10V
VFLS-2-LB3-CP3-MV-LVD-WH-MM	60219102	VersaFlood, Small, White Lumen Pkg 2	2428 – 4772					
VFLS-3-LB3-CP3-MV-LVD-MM	60220101	VersaFlood, Small, Bronze Lumen Pkg 3	5199 – 8421	60 45 35	3000K 4000K 5000K	80+	120-277V	0-10V
VFLS-3-LB3-CP3-MV-LVD-WH-MM	60220102	VersaFlood, Small, White Lumen Pkg 3	5199 – 8421					
VFLS-4-LB3-CP3-MV-LVD-MM	60221101	VersaFlood, Small, Bronze Lumen Pkg 4	7135 – 11787	80 60 45	3000K 4000K 5000K	80+	120-277V	0-10V
VFLS-5-LB3-CP3-MV-LVD-MM	60221201	VersaFlood, Small, Bronze Lumen Pkg 5	12095 – 17599	120 100 80	3000K 4000K 5000K	80+	120-277V	0-10V
VFLS-6-LB3-CP3-MV-LVD-MM	60222101	VersaFlood, Small, Bronze Lumen Pkg 6	15792 – 22789	150 120 100	3000K 4000K 5000K	80+	120-277V	0-10V

ACCESSORIES* (Order Separately, Field Install)

Catalog / Part #	Order #	Description
VFLS-WM-BZ	70340101	VersaFlood Wall Mount Kit
FL-JB-BZ	70539101	Flood Junction Box Cover Kit
FL-GS-BZ	70540101	Flood Ground Stake


* Accessories for lumen package 1, 2, 3 & 4 only.
Not compatible with lumen packages 5 or 6.




VFLS | VersaFlood Small
3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING

Lumen Package Sizes 5 & 6

Mounting Options:
(Included in package)



Pre-Installed Slipfit
Knuckle Mount




Trunnion Mount

Lumen Package Sizes 1, 2, 3 & 4

Mounting Options:
(Included in package)




Pre-Installed Threaded
Knuckle Mount



Trunnion Mount


DISTRIBUTION

7HX7V




DIMENSIONS

Slipfit Knuckle and Treaded Knuckle Mounts




Lumen Package: 5 & 6



Lumen Package: 1, 2, 3 & 4

Trunnion Mount



Lumen Pkg.	a	b	c	d	Trunnion Height (e)	weight w/ knuckle	weight w/ trunnion	EPA
1	7.6"	4.2"	5.8"	2.0"	6.5"	2.2 lbs.	2.2 lbs.	0.18 ft²
2	8.6"	5.2"	7.2"	2.2"	7.5"	2.73 lbs.	2.73 lbs.	0.27 ft²
3	9.8"	6.4"	8.7"	2.2"	8.7"	3.7 lbs.	3.7 lbs.	0.42 ft²
4	9.8"	6.4"	8.7"	2.2"	8.7"	3.7 lbs.	3.7 lbs.	0.42 ft²
5	15.3"	7.5"	10.2"	2.7"	12.3"	8.8 lbs.	7.5 lbs.	0.6 ft²
6	15.2"	8.3"	11.4"	2.9"	13.1"	10.6 lbs.	9.5 lbs.	0.6 ft²



VAL | VersaArea Lights

3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

- Applications: Ideal for parking lots, car dealerships, stadium lighting, parks and more.
- **Lumen Boost®** Select from 3 lumen levels
 - **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
 - **3 Distribution Options**
 - Controls Ready—area lights equipped with quick install occupancy controls port
 - Universal 120-277 voltage and 347-480V options
 - 0-10V dimming
 - Rated Life (L70) Lumen Pkg. 1, 2 & 3 > 100,000 hours
Lumen Pkg. 4 > 95,000 hours



Lumen Pkg.
Sizes 1 & 2



Lumen Pkg.
Size 3 & 4



CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Distribution	Voltage	Dimming	Controls
VAL VersaArea Light	Lumen Pkg. (Nominal/Approx.)	LB3 3 Lumen Boost®	CP3 3 CCT Color Preference®	T3 Type III T4 Type IV¹ T5 Type V	MV Multi-Volt 120-277V HV High-Volt 347-480V²	LVD Low Voltage Dimming 0-10V	7PR 7-Pin Receptacle w/ Shorting Cap
	1 7200 – 14000 lm	Lumen Pkg #1: 100 80 60W	3000K				
	2 12000 – 22000 lm	Lumen Pkg #2: 150 120 100W	4000K				
	3 18000 – 29000 lm	Lumen Pkg #3: 200 180 150W	5000K				
	4 24000 – 43500 lm	Lumen Pkg #4: 300 240 200W					

Notes: 1. Type IV distribution is MTO only. Longer lead times apply.
2. High-Volt 347-480V MTO only. Longer lead times apply.



VAL | VersaArea Lights

3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Delivered Lm Range (LB3)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim	Bug Rating		
									B	U	G
VAL-1-LB3-CP3-T3-MV-LVD-7PR	60210101	VAL, Lm Pkg 1, Type 3 Dist.	8415 – 13366	100 80 60	3000K 4000K 5000K	80+	120-277V	0-10V	3	0	3
VAL-1-LB3-CP3-T5-MV-LVD-7PR	60211101	VAL, Lm Pkg 1, Type 5 Dist.	8574 – 13203	100 80 60		80+	120-277V	0-10V	3	0	1
VAL-2-LB3-CP3-T3-MV-LVD-7PR	60212101	VAL, Lm Pkg 2, Type 3 Dist.	14589 – 21806	100 120 150		80+	120-277V	0-10V	4	0	4
VAL-2-LB3-CP3-T5-MV-LVD-7PR	60213101	VAL, Lm Pkg 2, Type 5 Dist.	14697 – 21773	100 120 150		80+	120-277V	0-10V	4	0	3
VAL-3-LB3-CP3-T3-MV-LVD-7PR	60214101	VAL, Lm Pkg 3, Type 3 Dist.	20111 – 28151	150 180 200		80+	120-277V	0-10V	4	0	4
VAL-3-LB3-CP3-T5-MV-LVD-7PR	60215101	VAL, Lm Pkg 3, Type 5 Dist.	21110 – 29043	150 180 200		80+	120-277V	0-10V	4	0	3
VAL-4-LB3-CP3-T3-MV-LVD-7PR	60216101	VAL, Lm Pkg 4, Type 3 Dist.	28404 – 42460	200 240 300		80+	120-277V	0-10V	5	0	5
VAL-4-LB3-CP3-T5-MV-LVD-7PR	60217101	VAL, Lm Pkg 4, Type 5 Dist.	29151 – 43051	200 240 300		80+	120-277V	0-10V	5	0	4

MADE TO ORDER DISTRIBUTION TYPE 4 (Lead times apply)

Catalog / Part #	Order #	Description	Delivered Lm Range (LB3)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim	Bug Rating		
									B	U	G
VAL-1-LB3-CP3-T4-MV-LVD-7PR	60225101	VAL, Lm Pkg 1, Type 4 Dist.	8428 – 13019	100 80 60	3000K 4000K 5000K	80+	120-277V	0-10V	3	0	3
VAL-2-LB3-CP3-T4-MV-LVD-7PR	60226101	VAL, Lm Pkg 2, Type 4 Dist.	13708 – 21465	150 120 100		80+	120-277V	0-10V	3	0	3
VAL-3-LB3-CP3-T4-MV-LVD-7PR	60227101	VAL, Lm Pkg 3, Type 4 Dist.	20956 – 29462	200 180 150		80+	120-277V	0-10V	4	0	4
VAL-4-LB3-CP3-T4-MV-LVD-7PR	60228101	VAL, Lm Pkg 4, Type 4 Dist.	26545 – 39108	300 240 200		80+	120-277V	0-10V	4	0	4

MADE TO ORDER HIGH VOLTAGE OPTIONS (Lead times apply)

Catalog / Part #	Order #	Description
VAL-1-LB3-CP3-T3-HV-LVD-7PR	60210201	VAL, Lumen Pkg 1, Type 3 Dist., 347-480V
VAL-1-LB3-CP3-T4-HV-LVD-7PR	60225201	VAL, Lumen Pkg 1, Type 4 Dist., 347-480V
VAL-1-LB3-CP3-T5-HV-LVD-7PR	60211201	VAL, Lumen Pkg 1, Type 5 Dist., 347-480V
VAL-2-LB3-CP3-T3-HV-LVD-7PR	60212201	VAL, Lumen Pkg 2, Type 3 Dist., 347-480V
VAL-2-LB3-CP3-T4-HV-LVD-7PR	60226201	VAL, Lumen Pkg 2, Type 4 Dist., 347-480V
VAL-2-LB3-CP3-T5-HV-LVD-7PR	60213201	VAL, Lumen Pkg 2, Type 5 Dist., 347-480V
VAL-3-LB3-CP3-T3-HV-LVD-7PR	60214201	VAL, Lumen Pkg 3, Type 3 Dist., 347-480V
VAL-3-LB3-CP3-T4-HV-LVD-7PR	60227201	VAL, Lumen Pkg 3, Type 4 Dist., 347-480V
VAL-3-LB3-CP3-T5-HV-LVD-7PR	60215201	VAL, Lumen Pkg 3, Type 5 Dist., 347-480V
VAL-4-LB3-CP3-T3-HV-LVD-7PR	60216201	VAL, Lumen Pkg 4, Type 3 Dist., 347-480V
VAL-4-LB3-CP3-T4-HV-LVD-7PR	60228201	VAL, Lumen Pkg 4, Type 4 Dist., 347-480V
VAL-4-LB3-CP3-T5-HV-LVD-7PR	60217201	VAL, Lumen Pkg 4, Type 5 Dist., 347-480V

MADE TO ORDER SURGE PROTECTION OPTIONS (120-227V ONLY) (Longer lead times apply)

Catalog / Part #	Order #	Description
VAL-1-LB3-CP3-T3-MV-LVD-7PR-SPD10	60210101-SPD10	VAL, Lumen Pkg 1, Type 3 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-1-LB3-CP3-T4-MV-LVD-7PR-SPD10	60225101-SPD10	VAL, Lumen Pkg 1, Type 4 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-1-LB3-CP3-T5-MV-LVD-7PR-SPD10	60211101-SPD10	VAL, Lumen Pkg 1, Type 5 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-2-LB3-CP3-T3-MV-LVD-7PR-SPD10	60212101-SPD10	VAL, Lumen Pkg 2, Type 3 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-2-LB3-CP3-T4-MV-LVD-7PR-SPD10	60226101-SPD10	VAL, Lumen Pkg 2, Type 4 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-2-LB3-CP3-T5-MV-LVD-7PR-SPD10	60213101-SPD10	VAL, Lumen Pkg 2, Type 5 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-3-LB3-CP3-T3-MV-LVD-7PR-SPD10	60214101-SPD10	VAL, Lumen Pkg 3, Type 3 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-3-LB3-CP3-T4-MV-LVD-7PR-SPD10	60227101-SPD10	VAL, Lumen Pkg 3, Type 4 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-3-LB3-CP3-T5-MV-LVD-7PR-SPD10	60215101-SPD10	VAL, Lumen Pkg 3, Type 5 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-4-LB3-CP3-T3-MV-LVD-7PR-SPD10	60216101-SPD10	VAL, Lumen Pkg 4, Type 3 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-4-LB3-CP3-T4-MV-LVD-7PR-SPD10	60228101-SPD10	VAL, Lumen Pkg 4, Type 4 Dist., 120-277V with Factory-installed 10KV Surge Protection
VAL-4-LB3-CP3-T5-MV-LVD-7PR-SPD10	60217101-SPD10	VAL, Lumen Pkg 4, Type 5 Dist., 120-277V with Factory-installed 10KV Surge Protection

VAL | VersaArea Lights

3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING


MOUNTING OPTIONS

Cat / Part #	Order #	Description
VAL-QMA	70335101	VersaArea Light Quick Arm Mount
VAL-SFA	70336101	VersaArea 2 3/8" Slip Fitter Arm Mount
VAL-TRA	70337101	VersaArea Trunnion Arm Mount
VAL-ASA	70338101	VersaArea Adjustable Straight Arm Mount
VAL-WMB	70339101	VersaArea Wall Mount Bracket




ACCESSORIES (Order Separately, Field Install)


Cat / Part #	Order #	Description
VAL-LS-SM	70704101	VersaArea Light, Light Shield, Small Housing (for sizes 1 and 2 – 60210101, 60211101, 60212101, 60213101)
VAL-LS-LG	70705101	VersaArea Light, Light Shield, Large Housing (for Sizes 3 and 4 – 60214101, 60215101, 60216101, 60217101)
7PR-PC	70218101	7-Pin Receptacle Photocell
7PR-PC-480	70219101	7-Pin Receptacle Photocell 480VAC
70211101	QI-MW-OCC	IP65 Plug-In Motion Sensor 0-10V Dimming 12-24 VDC
70226101	QI-PIR-OCC	IP65 Plug-In PIR Sensor 0-10V Dimming 12-24 VDC

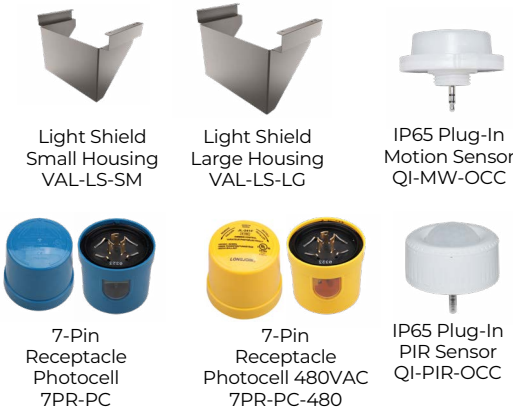

DISTRIBUTION

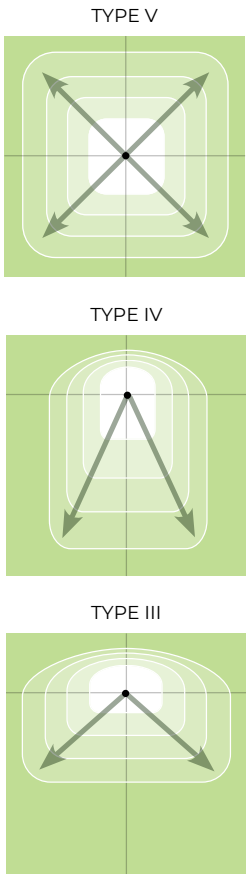


DIMENSIONS

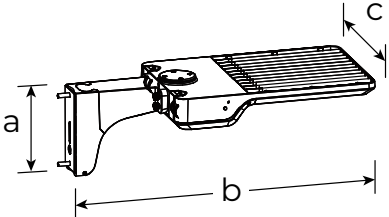


Quick Arm Mount

Lumen Pkg.	a	b	c	weight	EPA
1	7.0"	20.9"	10.4"	10.8 lbs.	1.373 ft²
2	7.0"	23.9"	13.1"	11.8 lbs.	2.082 ft²
3	7.0"	27.0"	13.1"	14 lbs.	2.976 ft²
4	7.0"	27.0"	13.1"	15 lbs.	2.976 ft²

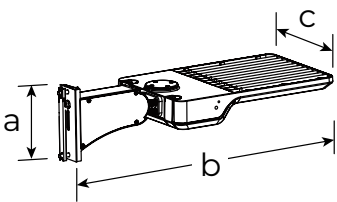


Adjustable Straight Arm Mount

Lumen Pkg.	a	b	c	weight	EPA
1	6.3"	21.7"	10.4"	7.6 lbs.	1.373 ft²
2	6.3"	24.6"	10.4"	9.0 lbs.	2.082 ft²
3	6.3"	27.7"	13.1"	10.8 lbs.	2.976 ft²
4	6.3"	27.7"	13.1"	11.7 lbs.	2.976 ft²

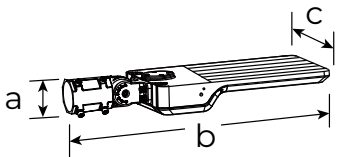

Slipfitter Arm Mount

Lumen Pkg.	a	b	c	weight	EPA
1	3.3"	19.6"	10.4"	7.3 lbs.	1.373 ft²
2	3.3"	22.6"	10.4"	8.7 lbs.	2.082 ft²
3	3.3"	25.7"	13.1"	10.5 lbs.	2.976 ft²
4	3.3"	25.7"	13.1"	11.5 lbs.	2.976 ft²

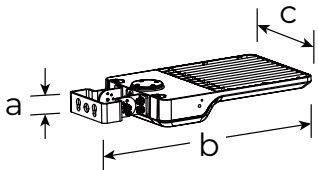

Trunnion Arm Mount

Lumen Pkg.	a	b	c	weight	EPA
1	3"	17.8"	10.4"	7.8 lbs.	1.373 ft²
2	3"	20.7"	10.4"	9.2 lbs.	2.082 ft²
3	3"	23.5"	13.1"	11.0 lbs.	2.976 ft²
4	3"	23.5"	13.1"	11.9 lbs.	2.976 ft²

SPL | Poles

SQUARE & ROUND STRAIGHT

KEY FEATURES

ETI's offers a large range of steel poles that work with our LED outdoor luminaire line.

- **Square and Round** options available
- **Bronze, Black, White,** and **Silver/Gray** finishes available
- Drilling available for all sides
- Anchor bolts can be pre-shipped upon request.
- Powder coat finish
- Pole is shipped standard with pole cap (drill mount only), base cover, anchor bolts and template, hand hole cover, grounding provision/bolt and back bar



CATALOG LOGIC

Series	Shape	Height	Drill Type	Voltage	Finish
SPL Steel Poles	S4 4" Square Shaft	15 (15 ft.) 20 (20 ft.) 25 (25 ft.)	D 4 sides with button plugs ND Not Drilled T Tenon 2.38" x 4.00"	07* 07 Gauge 11 11 Gauge	BZ (Bronze) B (Black) W (White) S (Silver/Gray)
	S5 5" Square Shaft	25 (25 ft.) 30 (30 ft.)			
	R3 3" Round Shaft	08 (8 ft.) 10 (10 ft.) 12 (12 ft.)			
	R4 4" Round Shaft	15 (15 ft.) 20 (20 ft.)			
	R5 5" Round Shaft (Straight)	25 (25 ft.) 30 (30 ft.)			

Notes:
*07 Gauge available for Square 30' height only and for Round 25' and 30' heights only.

25 ft. Round available in 07 Gauge only.

Anchor Bolts ship with poles.
For pre-shipped anchor bolts, please add catalog number PRESHIPANCHORBOLTQ to order. Kit includes qty 4 anchor bolts, template and installation hardware.



SPL | Poles
SQUARE & ROUND STRAIGHT

Catalog Part Number	Mounting Height (ft.)	Shaft Size (in.)	Wall Thickness	Weight (lbs.)	Bolt Circle	Effective Project Area Rating w/1.3 Gust Factor (sq. ft.)		
						90mph	100mph	120mph
SQUARE POLES 7 GAUGE								
SPL-S5-30-[XD/ND/TN]-07-X	30	5	7	422	10.5" – 11.5"	8.6	6.9	4.9
SQUARE POLES 11 GAUGE								
SPL-S4-15-[D/ND/T]-11-X	15	4	11	126	8" – 9"	12.3	9.8	7
SPL-S4-20-[D/ND/T]-11-X	20	4	11	156	8" – 9"	7.3	5.9	4.2
SPL-S4-25-[D/ND/T]-11-X	25	4	11	191	8" – 9"	3.3	2.6	1.8
SPL-S5-25-[D/ND/T]-11-X	25	5	11	225	10.5" – 11.5"	6.9	5.6	4
SPL-S5-30-[D/ND/T]-11-X	30	5	11	263	10.5" – 11.5"	3.4	2.7	1.9
ROUND POLES 7 GAUGE								
SPL-R5-25-[D/ND/T]-07-X	25	5	7	190	8" – 9"	5	3.7	2
SPL-R5-30-[D/ND/T]-07-X	30	5	7	355	9.5" – 10.5"	6.6	4.8	2.7
ROUND POLES 11 GAUGE								
SPL-R3-08-[D/ND/T]-11-X	8	3	11	45	8" – 9"	8.4	6.2	3.7
SPL-R3-10-[D/ND/T]-11-X	10	3	11	53	8" – 9"	6.7	5	3
SPL-R3-12-[D/ND/T]-11-X	12	3	11	61	8" – 9"	5	3.9	2.1
SPL-R4-15-[D/ND/T]-11-X	15	4	11	91	8" – 9"	7.8	6.2	3.5
SPL-R4-20-[D/ND/T]-11-X	20	4	11	123	8" – 9"	4.1	3.1	1.7
SPL-R5-30-[D/ND/T]-11-X	30	5	11	228	8" – 9"	2.8	2	4

Replacement parts and additional mounting accessories available upon request.



WALL PACKS



CWPK | Full Cutoff Wall Pack

3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

Full cutoff design maximizes light distribution and application spacing, while eliminating uplight. Applications: Ideal for parking lots, security lighting, commercial entryways, industrial facilities and more.



- **Lumen Boost®** Select from 3 lumen levels
- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- **Dusk to Dawn** Photocell w/ enable/disable standard
- Full cut-off wall pack
- Universal 120-277 voltage
- 0-10V dimming
- Long Life: rated for > 100,000 hours (L70)



Hinged Access
for wiring,
Wattage & CCT
select access



Photocell
w/cover
+ enable/disable



CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Voltage	Dimming
CWPK Cutoff Wall Pack	Lumen Pkg. (Nominal/Approx.) 1 4000 – 8000 lm 2 9000 – 14000 lm	LB3 3 Lumen Boost® Lumen Pkg #1: 20 40 60W Lumen Pkg #2: 60 80 100W	CP3 3 CCT Color Preference® 3000K 4000K 5000K	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V

ACCESSORIES


OC Sensor and BBU accessories available. See ETISSL.com for details.

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Delivered Lumen Range (LB3)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim	Bug Rating		
									B	U	G
CWPK-1-LB3-CP3-MV-LVD	61511101	Cutoff Wall Pack, Lumen Pkg 1	2880 – 8578 lm	20 40 60	3000K 4000K 5000K	80+	120-277V	0-10V	3	2	1
CWPK-2-LB3-CP3-MV-LVD	61512101	Cutoff Wall Pack, Lumen Pkg 2	8466 – 13856 lm	60 80 100	3000K 4000K 5000K	80+	120-277V	0-10V	3	2	2



DISTRIBUTION



DIMENSIONS



Lumen Pkg.	a	b	c	weight
1	6.02"	9.84"	8.07"	5.07 lbs.
2	6.42"	12.83"	9.57"	7.05 lbs.

SWPK | Security Wall Pack

3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

Shaped like a traditional wall pack, this luminaire offers a Dusk-to-Dawn feature. It also provides flexible choices with 9 CCT/lumen combinations. Applications: Designed for perimeter illumination for safety, security and identity.

- **Lumen Boost®** Select from 3 lumen levels
- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- **Dusk to Dawn** Photocell w/ enable/disable standard
- Universal 120-277 voltage
- 0-10V dimming
- Long Life: rated for > 90,000 hours (L70)



Photocell
with enable
& disable


CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Voltage	Dimming
SWPK Security Wall Pack	Lumen Pkg. (Nominal/Approx.) 1 1800 – 4050	LB3 3 Lumen Boost® Lumen Pkg #1: 15 20 30W	CP3 3 CCT Color Preference® 3000K 4000K 5000K	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Delivered Lumen Range (LB3)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim
SWPK-1-LB3-CP3-MV-LVD	61506101	Security Wall Pack	10	2230 – 4163	15 20 30	3000K 4000K 5000K	80+	120-277V	0-10V

DISTRIBUTION



DIMENSIONS

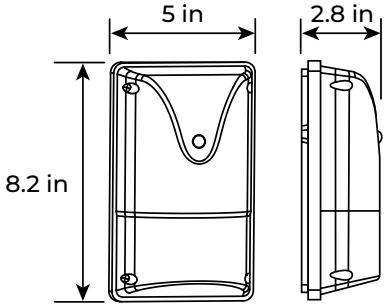

VPK | VersaPak Wall Pack

ADJUSTABLE HEAD | 3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

Applications: Ideal for building entrances, loading docks, walkways and storage facilities.

- **Lumen Boost®** Select from 3 lumen levels
- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- **Dusk to Dawn** Photocell w/ enable disable standard
- Adjustable head pivots up to 90 degrees
- Universal 120-277 voltage
- 0-10V dimming
- Long Life: rated for > 80,000 hours (L70)



Hinged Access
for wiring,
Wattage & CCT
select access




Photocell
w/cover
+ enable
disable



CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Voltage	Dimming
VPK VersaPak Adjustable Wall Pack	Lumen Pkg. (Nominal/Approx.)	LB3 3 Lumen Boost®	CP3 3 CCT Color Preference®	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V
	1 1900 – 4050 lm	Lumen Pkg #1: 15 20 30W	3000K 4000K 5000K		
	2 3900 – 6750 lm	Lumen Pkg #2: 30 40 50W			
	3 6600 – 10800 lm	Lumen Pkg #3: 50 65 80W			

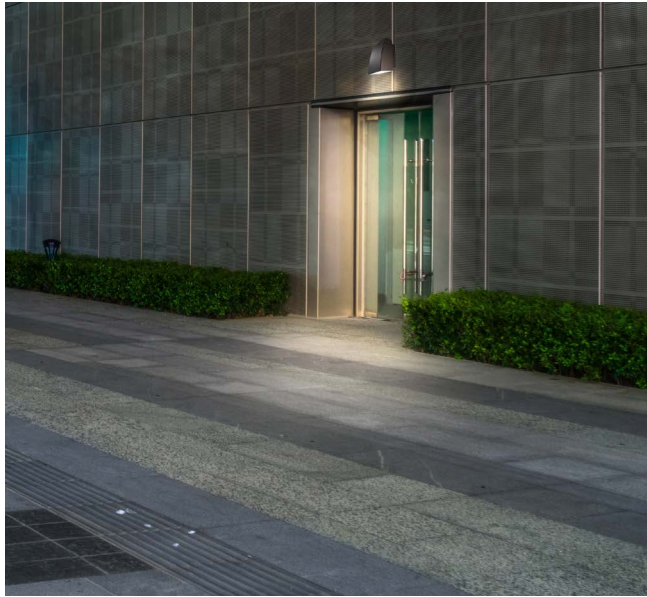

Dark Sky Compatible*


VersaPak can be utilized in dark sky compliant plans when kept at 0° and set to 3000K.

VPK | VersaPak Wall Pack

ADJUSTABLE HEAD | 3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Delivered Lumen Range (LB3)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim
VPK-1-LB3-CP3-MV-LVD	61507101	VersaPak, Lumen Pkg 1, Photocell with Enable/Disable Switch, Bronze	2172 – 4126	15 20 30	3000K 4000K 5000K	70+	120-277V	0-10V
VPK-2-LB3-CP3-MV-LVD	61508101	VersaPak, Lumen Pkg 2, Photocell with Enable/Disable Switch, Bronze	4148 – 7460	30 40 50				
VPK-3-LB3-CP3-MV-LVD	61508201	VersaPak, Lumen Pkg 3, Photocell with Enable/Disable Switch, Bronze	7165 – 11442	50 65 80				

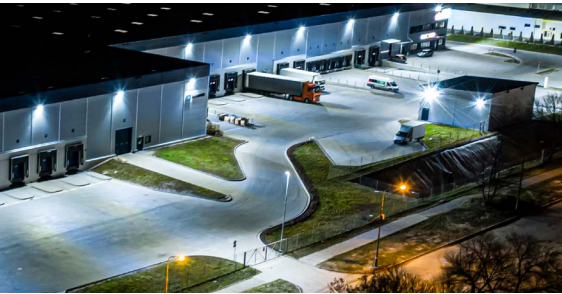


Adjustable Head for Fine-Tuned Distribution

VersaPak has an adjustable head that can pivot from 0° to 90°, putting light where it's needed most




DISTRIBUTION

TYPE II



DIMENSIONS

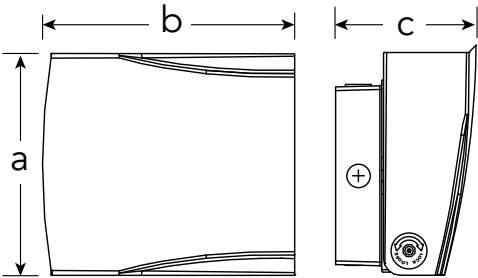

Lumen Pkg.	a	b	c	weight
1	6.54"	7.36"	4.57"	3.00 lbs.
2 & 3	7.83"	9.02"	5.55"	4.85 lbs.

MWPK | Modern Wall Pack

WITH SLIM GLASS REFRACTOR | 3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

- Applications: Ideal for buildings, storage units, walkways, entryways, and other outdoor applications.
- **Lumen Boost®** Select from 3 lumen levels
 - **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
 - **Dusk to Dawn** Photocell w/ enable/disable standard
 - Slim glass refractor—fixture extends only 4.4” from wall
 - Universal 120-277 voltage
 - 0-10V dimming
 - Rated Life (L70) Lumen Pkg. 1 > 100,000hours
Lumen Pkg. 2 & 3 > 90,000 hours



Hinged Access
for wiring,
Wattage & CCT
select access

Photocell
w/cover +
enable/disable
capability



CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Voltage	Dimming
MWPK Modern Slim Wall Pack	Lumen Pkg. (Nominal/Approx.)	LB3 3 Lumen Boost®	CP3 3 CCT Color Preference®	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V
	1 3600 – 8520 lm	Lumen Pkg #1: 30 45 60W	3000K		
	2 9600 – 13800 lm	Lumen Pkg #2: 80 90 100W	4000K		
	3 12000 – 19600 lm	Lumen Pkg #3: 100 120 140W	5000K		


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Delivered Lumen Range (LB3)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim
MWPK-1-LB3-CP3-MV-LVD	61509101	Slim Glass Refractor Wall Pack, Lumen Pkg 1	4461 – 7631	30 45 60	3000K 4000K 5000K	80+	120-277V	0-10V
MWPK-2-LB3-CP3-MV-LVD	61509201	Slim Glass Refractor Wall Pack, Lumen Pkg 2	10323 – 12648	80 90 100				
MWPK-3-LB3-CP3-MV-LVD	61510101	Slim Glass Refractor Wall Pack, Lumen Pkg 3	13850 – 19311	100 120 140				

ACCESSORIES (Order Separately, Field Install)


Catalog / Part #	Order #	Description
MWPK-WG-SM	70537101	Wire Guard for MWPK, Size 1 & 2
MWPK-WG-LG	70538101	Wire Guard for MWPK, Size 3
MWPK-SH-SM	70706101	Light Shield for MWPK, Size 1 & 2
MWPK-SH-LG	70707101	Light Shield for MWPK, Size 3

DIMENSIONS



Lumen Pkg.	a	b	c	weight
1	8.8"	13.7"	4.4"	6.8 lbs.
2	8.8"	13.7"	4.4"	7.3 lbs.
3	12.8"	17.8"	4.5"	8.2 lbs.

DISTRIBUTION



TWPK | Traditional Wall Pack

3 CCT COLOR PREFERENCE® | 4 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

- ETI's bronze outdoor integrated LED wall pack with glass lens is ideal for building-mounted doorway, pathway illumination, building sides and more. This traditional pack provides simple flexibility, equipped with 4 selectable wattages and 3 selectable CCTs.
- **Lumen Boost®** Select from 4 lumen levels
 - **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
 - Photocell with Enable/Disable Switch
 - Universal 120-277 voltage
 - 0-10V dimming
 - Rated Life (L70) Lumen Pkg. 1 > 100,000hours
Lumen Pkg. 2 > 90,000 hours



Hinged Access
for wiring,
Wattage & CCT
select access

Photocell
w/cover + enable
disable




CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Voltage	Dimming
TWPK Traditional Wall Pack	Lumen Pkg. (Nominal/Approx.)	LB4 3 Lumen Boost®	CP3 3 CCT Color Preference®	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V
	1 4000 – 8500	Lumen Pkg #1: 30 40 50 60W	3000K		
	2 9500 – 14500	Lumen Pkg #2: 70 80 90 100W	4000K 5000K		


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Delivered Lumen Range (LB4)	Wattage Levels (Nominal)	CCT	CRI	Volt.	Dim
TWPK-1-LB4-CP3-MV-LVD	61505101	Traditional Wall Pack, Lumen Package 1	4794 – 8500	30 40 50 60	3000K 4000K 5000K	80+	120-277V	0-10V
TWPK-2-LB4-CP3-MV-LVD	61505201	Traditional Wall Pack, Lumen Package 2	10514 – 14036	70 80 90 100				

DISTRIBUTION



DIMENSIONS

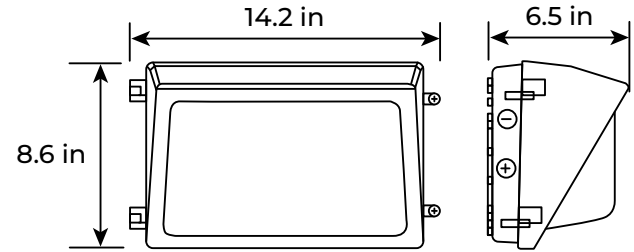

Unit Weight
7.5 lbs.

WP | Residential Wall Pack
3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING



KEY FEATURES

Applications: Ideal for residential housing or building sides,, security lighting, landscape lighting, storage areas and more.

- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- **Dusk to Dawn** with Hi-Lo feature: 50% brightness at dusk, 100% brightness when motion detected
- **Motion Sensor** Integrated motion sensor—detects at 120°
- **Adjustable Timer** on-time options: 2/5/15 minutes
- Universal 120-277 voltage
- 0-10V dimming
- Long Life: rated for > 60,000 hours (L70)



Dusk to Dawn
Light comes on at 50% at dusk, then goes to 100% when motion is detected

PIR Motion Sensor

CATALOG LOGIC


Series	Size	Lumens	CRI	CCT	Voltage	Sensor	Finish
WP Wall Pack	8IN 8"	Lumen Pkg. (Nominal/Approx.) 2350LM	8 80+ CRI	CP3 3 CCT Color Preference® 3000K 4000K 5000K	MV Multi-Volt 120-277V	OS Integrated OC Sensor	BZ Bronze

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Delivered Lumen Range	Wattage (Nominal)	CCT	CRI	Volt.	Dim
WP-8IN-2350LM-8-CP3-MV-OS-BZ	53901111	Residential Wall Pack with Dusk to Dawn and Motion Sensor	4	2525 – 2731 lm	20	3000K 4000K 5000K	80+	120-277V	0-10V



DISTRIBUTION




DIMENSIONS

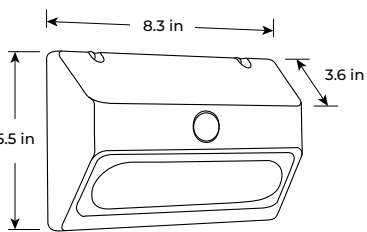


Unit Weight
2.16 lbs.



WALL PACK
MOUNTING HEIGHT GUIDE

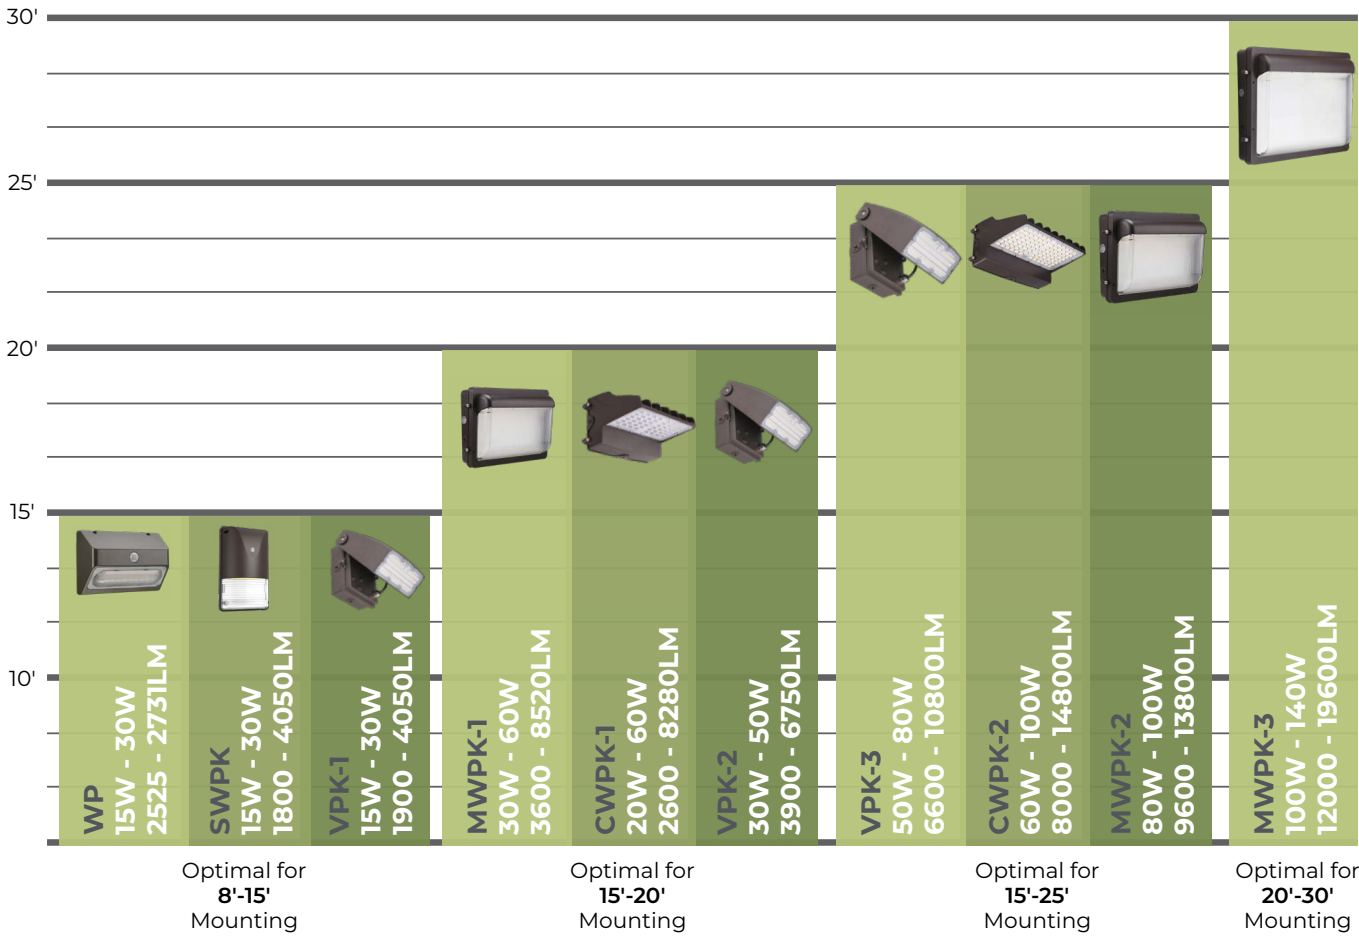

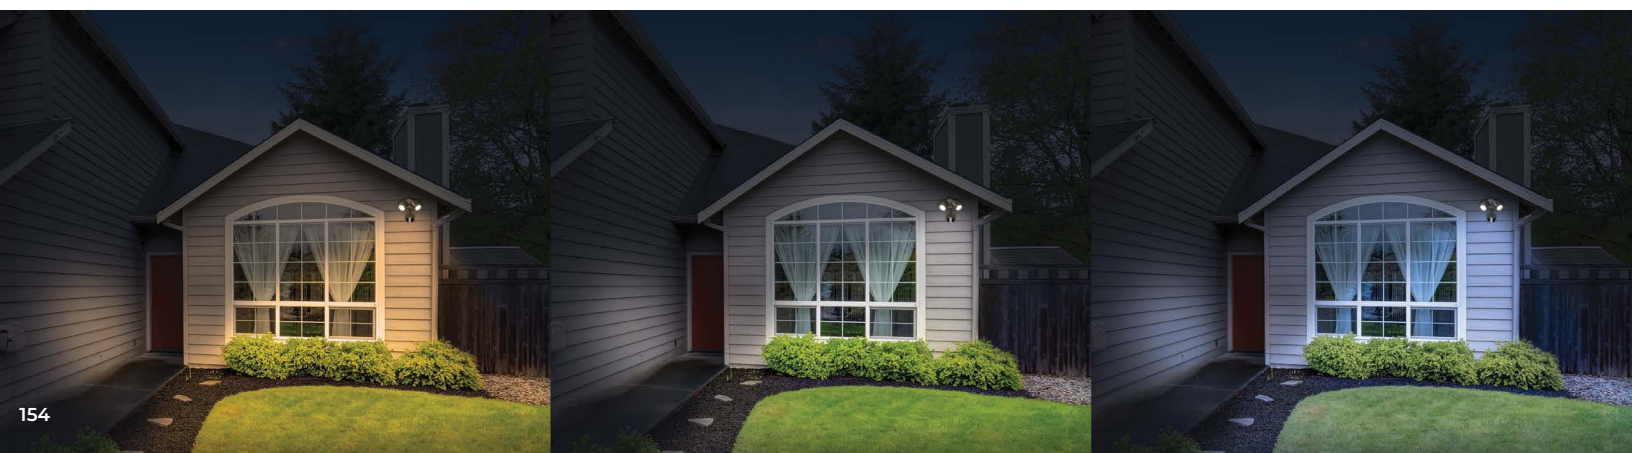

SC | Multiple Head Security Lights

2 LUMEN BOOST® | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Replaces 2-3 120W PAR lamp with 90° beam spread. Ideal for residential housing or building sides, security lighting, garage areas, walkways and more.

- **Lumen Boost®** Select from 2 lumen levels
- **Dusk to Dawn** Integrated photocell is standard. Photocell cap included for manual switch control
- Adjustable head provides full range of movement
- 120 voltage
- Long Life: rated for > 60,000 hours (L70)




CATALOG LOGIC

Series	Heads	Lumens	CRI	CCT	Voltage	Finish
SC Security Light		Lumen Pkg. (Nominal/Approx.) 2 Lumen Boost® 2400LM 2400 lm 1200 lm	8 2HD (80+)	40K 4000K	SV Single Volt 120V	BZ Bronze W White
	2HD Two-Head					
	3HD Three-Head	3600LM 3600 lm 1800 lm				


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	Delivered Lumens	Wattage (Nominal)	CCT	CRI	Volt.	Dim
SC-2HD-2400LM-8-40K-SV-BZ	51405143	2-Head Security Light, Bronze	4	1272 / 2544 lm	28 / 14	4000K	80+	120V	Non-Dim
SC-2HD-2400LM-8-40K-SV-W	51405144	2-Head Security Light, White	4	1272 / 2544 lm	28 / 14				
SC-3HD-3600LM-8-40K-SV-BZ	51403141	3-Head Security Light, Bronze	4	1970.5 / 3941 lm	42 / 21				
SC-3HD-3600LM-8-40K-SV-W	51403142	3-Head Security Light, White	4	1970.5 / 3941 lm	42 / 21				


DISTRIBUTION



MOTION



DIMENSIONS

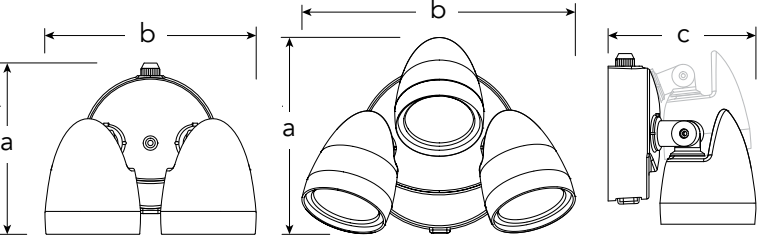

Product	a	b	c	weight
2-Head Security Light	5.7"	7.1"	4.95"	1.92 lbs.
3-Head Security Light	5.9"	8.7"	5.9"	2.9 lbs.



SC | Multiple Head Security Lights

WITH MOTION SENSOR | 3 CCT COLOR PREFERENCE® | 120V | NON-DIMMABLE



KEY FEATURES

Applications: Replaces 2-3 120W PAR lamp with 90° beam spread. Ideal for residential housing or building sides, security lighting, garage areas, walkways and more.

- **Color Preference®** Select from 3 CCTs (3000/4000/5000K)
- **Dusk to Dawn** with Hi-Lo feature: 50% brightness at dusk, 100% brightness when motion detected
- **Motion Sensor** Integrated motion sensor—detects at 240° Adjustable sensor sensitivity detection range
- **Adjustable Timer** high beam options: 1/5/10 minutes area light options: 3/5 hr / dusk-to-dawn
- Universal 120-277 voltage
- 0-10V dimming
- Long Life: rated for 169,000 hours (L70)



Adjustable
Tool-free
adjustable head
for fine-tuned
distribution



SC | Multiple Head Security Lights

WITH MOTION SENSOR | 3 CCT COLOR PREFERENCE® | 120V | NON-DIMMABLE

CATALOG LOGIC


Series	Heads	Lumens	CRI	CCT	Voltage	Sensor	Finish
SC Security Light		Lumen Pkg. (Nominal/Approx.) 2 Lumen Boost® 2400LM 2400 lm 1200 lm 3600LM 3600 lm 1800 lm	8 2HD (80+)	CP3 3 CCT Color Preference® 3000K 4000K 5000K	SV Single Volt 120V	OS Integrated OC Sensor	BZ Bronze W White
	2HD Two-Head						
	3HD Three-Head						

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Delivered Lumen Range (at highest Wattage)	Wattage (Nominal)	CCT	CRI	Volt.	Dim
SC-2HD-2400LM-8-CP3-SV-OS-BZ	51406111	2-Head Security Light with motion, Bronze	4	2465.4 – 2684.7 lm	28 / 14	3000K 4000K 5000K	80+	120V	Non-Dim
SC-2HD-2400LM-8-CP3-SV-OS-W	51406112	2-Head Security Light with motion, White	4	2465.4 – 2684.7 lm	28 / 14				
SC-3HD-3600LM-8-CP3-SV-OS-W	514032120	3-Head Security Light with motion, White	4	3662.4 – 3863 lm	42 / 21				




DISTRIBUTION



MOTION



DIMENSIONS

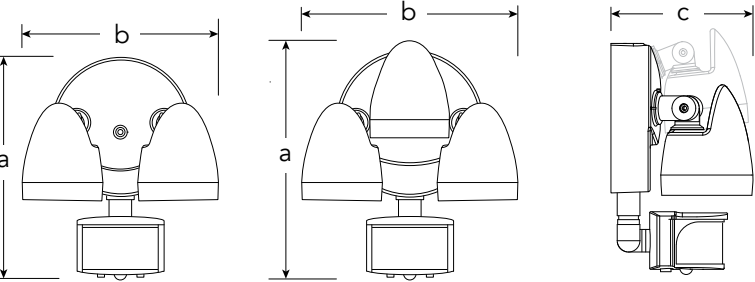

Product	a	b	c	weight
2-Head Security Light	7.1"	8.5"	5.0"	2.24 lbs.
3-Head Security Light	9.7"	8.5"	5.2"	3.2 lbs.



EM | Bicolor LED Exit Sign & Combo

SINGLE/DOUBLE FACE | 120-277V

ETI's Bicolor LED Exit Signs with high impact UL 94V-0 flame-rated thermoplastic housing are a great value option for standard indoor egress systems. Applications: ideal for office, conference rooms, hallways, stairways, classrooms, reception/lobby, hotels, restaurants, warehouses and more.

- Includes red and green face panels
- Letters: 6 in. high with 3/4 in. stroke
- Built in 1.2V 1000mAh Ni-MH battery for minimum 90 min.
- Equipped with test button and AC Indicator Light
- Emergency operation (max 24 hr full recharge time)
- Single or double-face (Universal)
- UL 94V-0 flame rating on housing
- Lasts up to 50,000 hours of continuous use

Warranty
2-Year Warranty on Ni-MH battery
5-Year Limited Warranty on electronics and housing



BatteryElectrical & Housing





Bicolor LEDs & Panels

RED

GREEN




Simply flip the switch to select Bi-Color RED or Green LEDs

STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Finish	Face	LED Watts	Lumens	CCT	Volt.	Battery Type	Battery Operating Time
EM-EX-RG	65505101	Bicolor Red and Green Exit Sign with BBU	6	White	Single/Double	1	NA	NA	120-277V	Ni-MH	> 90 mins.
EM-ELC-RG	65506101	Bicolor Red and Green Emergency / Exit Sign Combo with BBU	6	White	Single/Double	3.8	241	6500K	120-277V	Ni-MH	> 90 mins.

PRODUCT DETAILS

Unit includes housing, two face plates, red and green panels, field-adjustable red and green light options, mounting bracket, canopy and standard jumper wires and wire connectors.

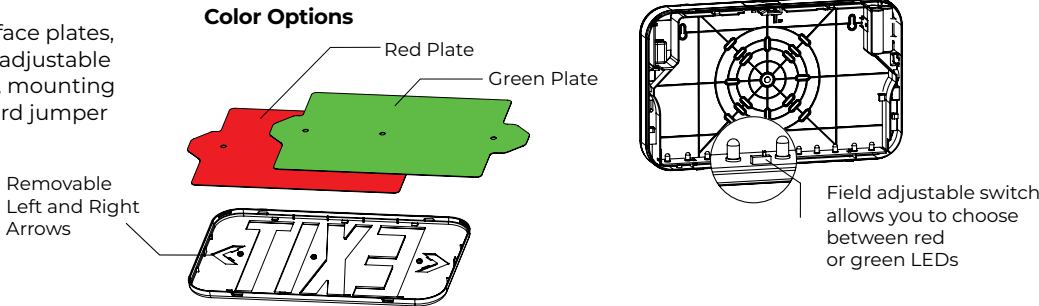

DIMENSIONS

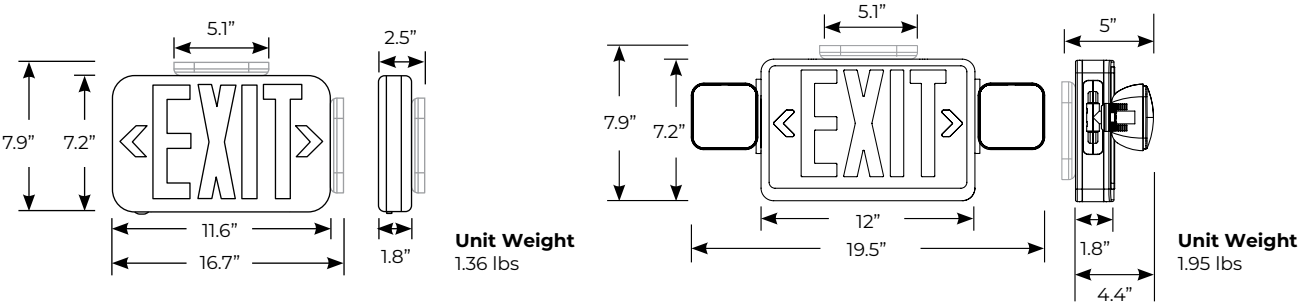

EM | Bicolor LED Emergency Light / Exit Sign Combo

WITH REMOTE COMPATIBILITY & BBU | DOUBLE FACE | 120-277V

ETI's Bicolor LED Exit Signs with high impact UL 94V-0 flame-rated thermoplastic housing are a great value option for standard indoor egress systems. Applications: ideal for office, conference rooms, hallways, stairways, classrooms, reception/lobby, hotels, restaurants, warehouses and more.

- Includes red and green face panels
- Letters: 6 in. high with 3/4 in. stroke
- Built in 1.2V 1000mAh Ni-MH battery for minimum 90 min.
- Equipped with test button and AC Indicator Light
- Emergency operation (max 24 hr full recharge time)
- Single Face (Universal)
- UL 94V-0 flame rating on housing
- Lasts up to 50,000 hours of continuous use

Warranty
3-Year Warranty on Ni-MH battery
5-Year Limited Warranty on electronics and housing



BatteryElectrical & Housing




STOCK ORDERING INFORMATION


Catalog / Part #	Order #	Description	Case QTY	Finish	Face	LED Watts	Lumens	CCT	Volt.	Battery Type	Battery Operating Time
EM-ELC-RG-RC	65507101	Bi-Color Red and Green Emergency / Exit Sign Combo with Remote Compatibility & BBU	6	White	Single	4	263	6500K	120-277V	Ni-MH	> 90 mins.

PRODUCT DETAILS

Unit includes housing, two face plates, red and green panels, field-adjustable red and green light options, mounting bracket, canopy and standard jumper wires and wire connectors.

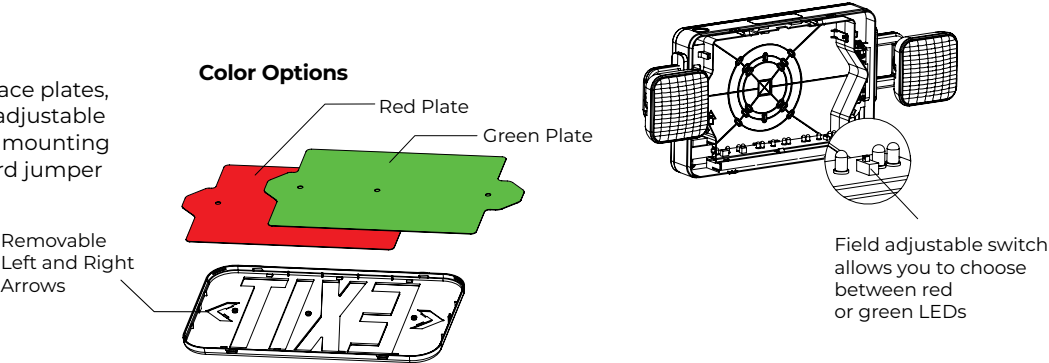

DIMENSIONS

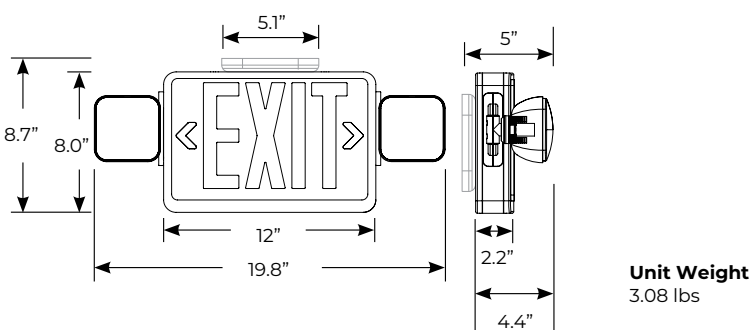

EM | Emergency Lights

DOUBLE HEAD | 120-277V

ETI's Double-Head Emergency Lights with battery backup are practical additions to egress lighting plans. Applications: ideal for offices, hallways, stairways, schools, universities, daycare facilities, adult living communities and more.

- Battery operating time: >90 minutes
- Recharge time: 24 hours
- Remote compatibility option available (for EM-EL-RC only)
- Lasts up to 50,000 hours of continuous use
- Test switch and charge indicator.
- EM-EL and EM-EL-RC:
Compatible with NFPA 101, OSHA and UL924 Listed emergency codes and Title 20 compliant
- EM-EL-B-1W and EM-EL-W-1W:
Compatible with NFPA 101, OSHA and UL924 Listed emergency codes and Title 20 compliant



EM-EL &
EM-EL-RC



EM-EL-B-1W



EM-EL-W-1W



STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Case QTY	LED Wattage (Nominal)	Delivered Lumen	CCT	Volt.	Dimensions	Wt. (lbs.)	BBU	Battery Operating Time
EM-EL	55501101	Emergency Light (2-head)	6	2.4	249	6500K	120-277V	13.7x 4.1 x 3.5 in.	1.49	Lithium Ion	> 90 mins.
EM-EL-RC	55501201	Emergency Light w/ Remote Compatibility (2-head)	6	2.4	249	6500K	120-277V	13.7x 4.1 x 3.5 in.	1.49	Lithium Ion	> 90 mins.
EM-EL-B-1W	65503102	2-Head EM Light, Black Finish	12	2	139	6500K	120-277V	9.3 x 4.3 x 1.7 in.	0.55	3.6V Ni-MH	> 90 mins.
EM-EL-W-1W	65504102	2-Head EM Light, White Finish	12	2	139	6500K	120-277V	9.3 x 4.3 x 1.7 in.	0.55	3.6V Ni-MH	> 90 mins.




SLVT | Sellado Vapor Tight Series
3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING



KEY FEATURES

ETI's 4-FT Vapor Tights are designed with durable stainless-steel latches to prevent moisture and dirt from compromising the housing and damaging interior wires and components inside the fixture. These moisture and dust-proof, IP65-rated luminaires are ideal for parking garages, commercial, industrial, storage and warehousing facilities.

- **Color Preference®** Select from 3 CCTs (3500K, 4000K, 5000K)
- **Lumen Boost** Select from 3 wattage settings
- Occupancy Sensor Options Available
- Rated Life (L70) 175,000 Hours

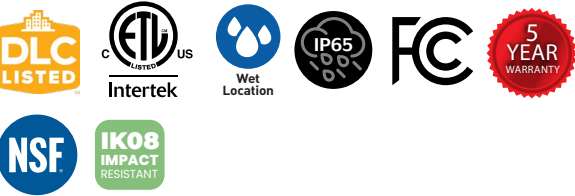

CATALOG LOGIC

Series	Size	Power	CRI	CCT	Voltage	Dim.	Sensors	BBU	Cords
SLVT Sellado Vapor Tight Series	2 (2') 4 (4') 8 (8')	LB3 (Lumen Boost)	80+ CRI	CP3 3 CCT	MV 120-277V	LVD 0-10V Dimming	OS OC Sensor (Blank) No Sensor	EM 8W Emergency Battery Backup (Blank) No BBU	CC6NTL120V 6', 14/3 So Cord w/NEMA Twist Lock – 120V Plug CC6NTL277V 6', 14/3 So Cord w/NEMA Twist Lock – 277V Plug (Blank) No Cord

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
SLVT-2-LB3-8CP3-MV-LVD	64507101	Sellado Series 2' Vapor Tight	20W 25W 30W	2619 – 4365	3500K 4000K 5000K	80+	120-277V	0-10V
SLVT-4-LB3-8CP3-MV-LVD	64508101	Sellado Series 4' Vapor Tight	25W 35W 50W	3428 – 7008				
SLVT-4-LB3-8CP3-MV-LVD-EM	64508101-EM	Sellado Series 4' Vapor Tight with 8W Emergency BBU						
SLVT-8-LB3-8CP3-MV-LVD	64509101	Sellado Series 8' Vapor Tight	60W 75W 90W	8617 – 12404				
SLVT-8-LB3-8CP3-MV-LVD-EM	64509101-EM	Sellado Series 8' Vapor Tight with 8W Emergency BBU						

Notes:
1. Sensor, and Cord options are MTO only.
2. EM available on 4' and 8' models only and cannot be ordered with cord options.
3. Cord options work with Sensor non-BBU models only.
4. Custom length cord and plug options available, contact ETI for details.




SLVT | Sellado Vapor Tight Series
3 CCT COLOR PREFERENCE® | 3 LUMEN BOOST® | 120-277V | 0-10V DIMMING

MADE TO ORDER OPTIONS (Longer lead times apply)

Catalog / Part #	Order #	Description
SLVT-4-LB3-8CP3-MV-LVD-OS-EM	64508101-I-EM	Sellado Series 4' Vapor Tight with Integral Motion Sensor and 8W Emergency BBU
SLVT-8-LB3-8CP3-MV-LVD-OS-EM	64509101-I-EM	Sellado Series 8' Vapor Tight with Integral Motion Sensor and 8W Emergency BBU
SLVT-2-LB3-8CP3-MV-LVD-CC6NTL120V	64507201	Sellado Series 2' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 120V Plug
SLVT-4-LB3-8CP3-MV-LVD-CC6NTL120V	64508201	Sellado Series 4' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 120V Plug
SLVT-8-LB3-8CP3-MV-LVD-CC6NTL120V	64509201	Sellado Series 8' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 120V Plug
SLVT-2-LB3-8CP3-MV-LVD-CC6NTL277V	64507301	Sellado Series 2' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 277V Plug
SLVT-4-LB3-8CP3-MV-LVD-CC6NTL277V	64508301	Sellado Series 4' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 277V Plug
SLVT-8-LB3-8CP3-MV-LVD-CC6NTL277V	64509301	Sellado Series 8' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 277V Plug
SLVT-2-LB3-8CP3-MV-LVD-OS-CC6NTL120V	64507201-I	Sellado Series 2' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 120V Plug and Sensor
SLVT-4-LB3-8CP3-MV-LVD-OS-CC6NTL120V	64508201-I	Sellado Series 4' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 120V Plug and Sensor
SLVT-8-LB3-8CP3-MV-LVD-OS-CC6NTL120V	64509201-I	Sellado Series 8' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 120V Plug and Sensor
SLVT-2-LB3-8CP3-MV-LVD-OS-CC6NTL277V	64507301-I	Sellado Series 2' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 277V Plug and Sensor
SLVT-4-LB3-8CP3-MV-LVD-OS-CC6NTL277V	64508301-I	Sellado Series 4' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 277V Plug and Sensor
SLVT-8-LB3-8CP3-MV-LVD-OS-CC6NTL277V	64509301-I	Sellado Series 8' Vapor Tight with 6', 14/3 So Cord w/NEMA Twist Lock 277V Plug and Sensor

DIMENSIONS

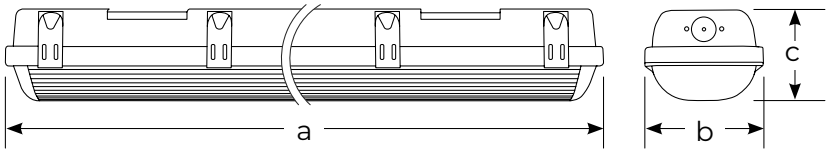

Size	a	b	c	weight (lbs)
2'	23.6"	5.0"	3.7"	3.64 lbs
4'	47.2"	5.0"	3.7"	5.95 lbs
8'	94.5"	5.0"	3.9"	13.45 lbs



VT | 4’ Vapor Tight 5400

120-277V | 0-10V DIMMING

KEY FEATURES

ETI's 4-FT Vapor Tights are designed with durable stainless-steel latches to prevent moisture and dirt from compromising the housing and damaging interior wires and components inside the fixture. These moisture and dust-proof, IP65-rated luminaires are ideal for parking garages, commercial, industrial, storage and warehousing facilities.

- Suspension and surface mounting kits included
- Link together up to 8 luminaires
- 4000K, 80+ CRI
- Rated Life (L70) 210,000 Hours



CATALOG LOGIC


Series	Size	Lumens	CRI / CCT	Voltage	Dimming	Sensor
VT Vapor Tights	4 (4 ft.)	Lumen Pkg. (Nominal/Approx.) 54 (5400 lm)	840 80+ CRI, 4000K	MV Multi-Volt 120-277V	D 0-10V Dimming	OS OC Sensor Blank No OC Sensor

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
VT-4-54-840-MV-D	54465141	4' Vapor Tight 5400, 4000K	51W	5482	4000K	80+	120-277V	0-10V
VT-4-54-840-MV-D-OS	54465141-I	4' Vapor Tight 5400, 4000K with Motion Sensor	51W	5482	4000K	80+	120-277V	0-10V


* External BBU options available for VT-4-54-840-MV-D (54465141) only when used without OC sensor. OC sensor also available as accessory. See spec sheet on ETISSL.com for details.

DIMENSIONS

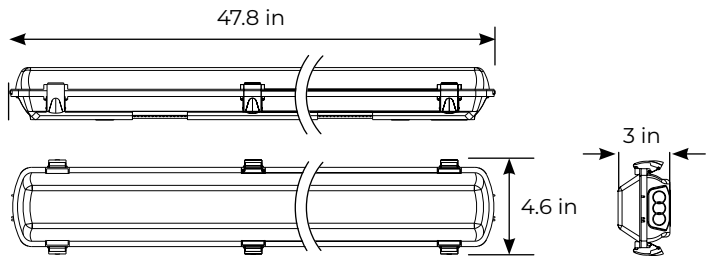

Unit Weight
4.3 lbs

PLOT



VT | 4’ Vapor Tight 3600

120-277V | 0-10V DIMMING

KEY FEATURES

ETI's 4-FT Vapor Tights are designed with durable stainless-steel latches to prevent moisture and dirt from compromising the housing and damaging interior wires and components inside the fixture. These moisture and dust-proof, IP65-rated luminaires are ideal for parking garages, commercial, industrial, storage and warehousing facilities.

- Suspension and surface mounting kits included
- Link together up to 7 luminaires
- 4000K, 80+ CRI
- Rated Life (L70) 60,000 Hours




CATALOG LOGIC

Series	Size	Wattage	CRI / CCT	Voltage	Voltage	Sensor
VT Vapor Tights	4 (4 ft.)	Lumen Pkg. (Nominal/Approx.) 31 (31W) 3600 Lm Pkg.	840 80+ CRI 4000K	MV Multi-Volt 120-277V, (0-10V Dim)	LVD Multi-Volt 120-277V, (0-10V Dim)	OS OC Sensor Blank No OC Sensor


STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
VT-4-31-840-MV-LVD	54656241	4' Vapor Tight, 4000K	31W	4120	4000K	80+	120-277V	0-10V
VT-4-31-840-MV-LVD-OS	54656241-I	4' Vapor Tight, 4000K with Motion Sensor	31W	4120	4000K	80+	120-277V	0-10V


* External BBU options available for VT-4-31-840-MV (54656241) only when used without OC sensor. OC sensor also available as accessory. See spec sheet on ETISSL.com for details.

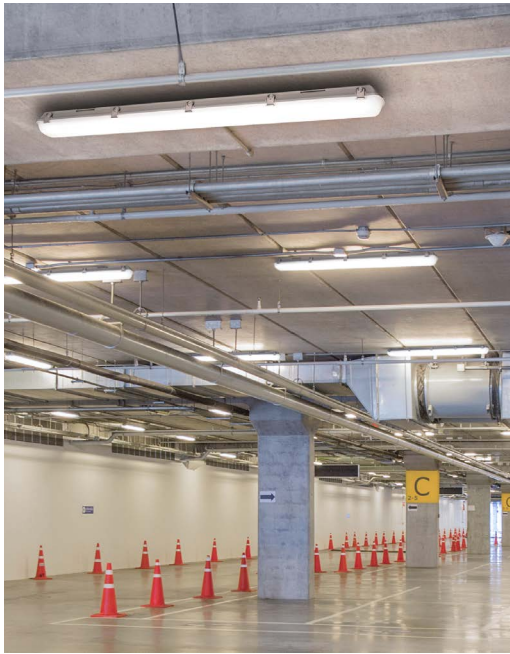

DIMENSIONS

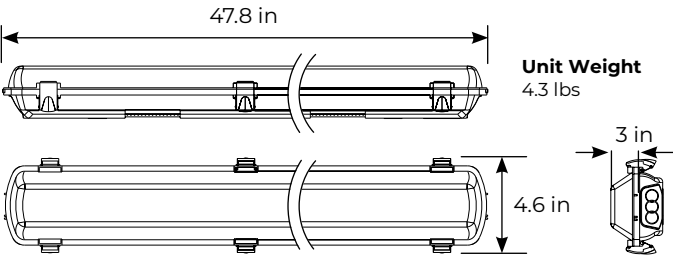

PLOT





HIGH BAYS

MOUNTING HEIGHT GUIDE



Essential Round HB



12" Round HB




Adjustable Beam HB




Compact Linear High Bay

Approximately
35000 – 40000 lm
Optimal for 30' to 40' ceilings

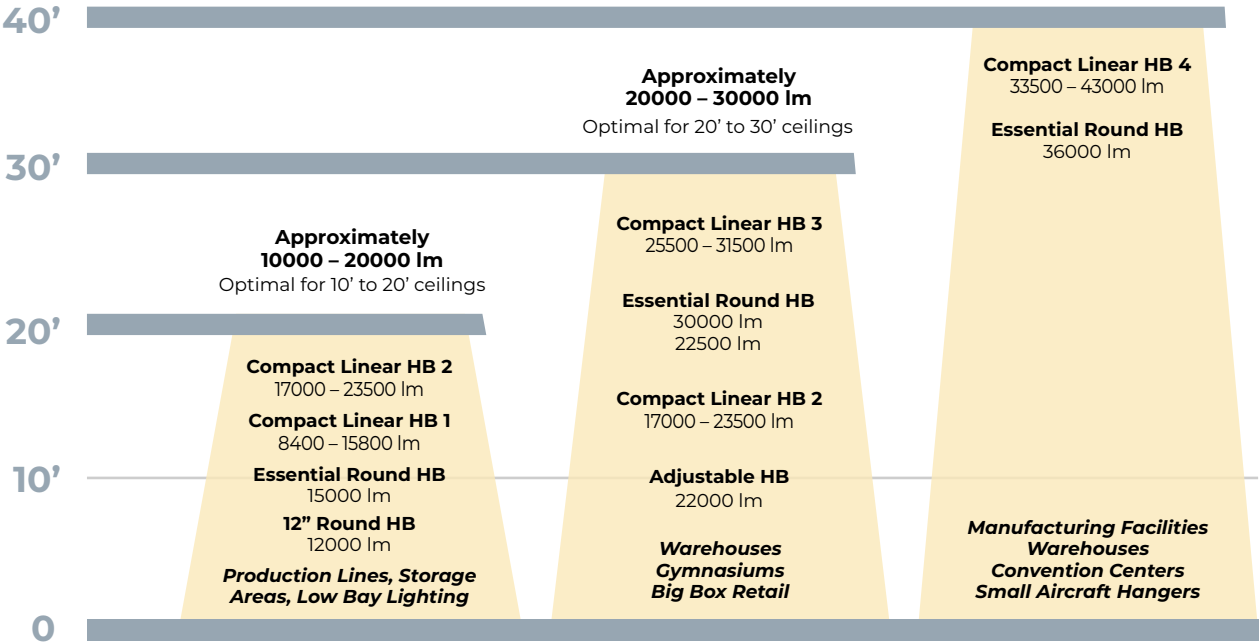

ERHB | Essential Round High Bay

IMPACT RESISTANT | 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING



KEY FEATURES

Essential Round High Bays are durable and flexible and have 3 Selectable Wattages and CCTs, multiple lenses, reflectors, and various mounting accessories. Applications: ideal for bay lighting, gym ceilings, industrial facilities, and more.

- **Color Preference®** Select from 3 CCTs (3500/4000/5000K)
- **Lumen Boost®** Select from 3 lumen levels
- Die-cast aluminum housing with impact-resistant lens
- 1/2" NPT steel hook with locking screw included
- J-Box Mount, Yoke Mount and Pendant Step Mount accessories available
- 0-10V dimming
- Rated Life (L70) 149,000 Hours



Black Finish



White Finish

Sensor-ready Port



2 Lens Options Available
90° (Standard)
60° (Order Separately)

CATALOG LOGIC

Series	Lumens	Lumen Boost	CRI	CCT	Voltage	Dimming	Finish Color
ERHB Essential Round High Bay	Lumen Pkg. Nominal/Approx. 15L 15000 lm 22L 22500 lm 30L 30000 lm 36L 36000 lm	LB3 3 Lumen Boost® Lumen Pkg 15L 100 80 60W Lumen Pkg 22L 150 120 100W Lumen Pkg 30L 200 180 150W Lumen Pkg 36L 240 220 200W	8 80+ CRI	CP3 3 CCT Color Preference® 3500K 4000K 5000K	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V	BL Black WH White¹

Notes: 1. 15L and 30L Luminaires are available in black finish only



ERHB | Essential Round High Bay

IMPACT RESISTANT | 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Wattage Levels (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
ERHB-15L-LB3-8-CP3-MV-LVD-BL	63815102	15000 Lumen Package, Black Finish	60 80 100W	9492 – 16114	3500K 4000K 5000K	80+	120-277V	0-10V
ERHB-22L-LB3-8-CP3-MV-LVD-WH	63815201	22500 Lumen Package, White Finish	100 120 150W	15406 – 23529				
ERHB-22L-LB3-8-CP3-MV-LVD-BL	63815202	22500 Lumen Package, Black Finish	100 120 150W	15406 – 23529				
ERHB-30L-LB3-8-CP3-MV-LVD-BL	63816102	30000 Lumen Package, Black Finish	150 180 200W	22242 – 30655				
ERHB-36L-LB3-8-CP3-MV-LVD-WH	63816201	36000 Lumen Package, White Finish	200 220 240W	28138 – 37943				
ERHB-36L-LB3-8-CP3-MV-LVD-BL	63816202	36000 Lumen Package, Black Finish	200 220 240W	28138 – 37943				


MADE-TO-ORDER PRODUCT INFO (Longer lead times apply. Contact ETi for details)

Catalog / Part #	Order #	Description
ERHB-15L-LB3-8-CP3-MV-LVD-BL-OS	63815102-I	High Bay, 15000 Lumen Package, Black Finish, with OC Sensor
ERHB-22L-LB3-8-CP3-MV-LVD-WH-OS	63815201-I	High Bay, 22500 Lumen Package, White Finish, with OC Sensor
ERHB-22L-LB3-8-CP3-MV-LVD-BL-OS	63815202-I	High Bay, 22500 Lumen Package, Black Finish, with OC Sensor
ERHB-30L-LB3-8-CP3-MV-LVD-BL-OS	63816102-I	High Bay, 30000 Lumen Package, Black Finish, with OC Sensor
ERHB-36L-LB3-8-CP3-MV-LVD-WH-OS	63816201-I	High Bay, 36000 Lumen Package, White Finish, with OC Sensor
ERHB-36L-LB3-8-CP3-MV-LVD-BL-OS	63816202-I	High Bay, 36000 Lumen Package, Black Finish, with OC Sensor
ERHB-15L-LB3-8-CP3-MV-LVD-BL-EM-R25	63815102-EM	High Bay, 15000 Lumen Package, Black Finish, with Round 25 Watt BBU
ERHB-22L-LB3-8-CP3-MV-LVD-WH-EM-R25	63815201-EM	High Bay, 22500 Lumen Package, White Finish, with Round 25 Watt BBU
ERHB-22L-LB3-8-CP3-MV-LVD-BL-EM-R25	63815202-EM	High Bay, 22500 Lumen Package, Black Finish, with Round 25 Watt BBU
ERHB-30L-LB3-8-CP3-MV-LVD-BL-EM-R40	63816102-EM	High Bay, 30000 Lumen Package, Black Finish, with Round 40 Watt BBU
ERHB-36L-LB3-8-CP3-MV-LVD-WH-EM-R40	63816201-EM	High Bay, 36000 Lumen Package, White Finish, with Round 40 Watt BBU
ERHB-36L-LB3-8-CP3-MV-LVD-BL-EM-R40	63816202-EM	High Bay, 36000 Lumen Package, Black Finish, with Round 40 Watt BBU




DIMENSIONS

Lumen Sizes: 15000 & 22500



Unit Weight
5.07 lbs.

Lumen Sizes: 30000 & 36000

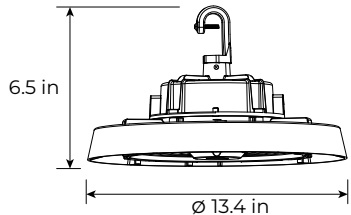

Unit Weight
7.05 lbs.

ERHB | Essential Round High Bay


IMPACT RESISTANT | 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING

ACCESSORIES (Order Separately, Field Install)


Catalog / Part #	Order #	Description
ERHB-STD-XMFR	70223101	480VAC to 208VAC, 325VA Stepdown Transformer
ERHB-QI-OCC-MS	70221101	ERHB Quick Install Occupancy Sensing, Motion Sensing
ERHB-RCOP	70222101	ERHB-Remote Control Occupancy Programmer
ERHB-YM-SM-W	70520101	Yoke Mount, Small Size (100W, 150W), White
ERHB-YM-SM-B	70518101	Yoke Mount, Small Size (100W, 150W), Black
ERHB-YM-LG-W	70521101	Yoke Mount, Large Size, (200W-240W), White
ERHB-YM-LG-B	70519101	Yoke Mount, Large Size, (200W-240W), Black
ERHB-JBM	70524101	Junction Box Mount
ERHB-PSM	70341101	Pendant Step Mount
ERHB-AR-SM	70513101	Aluminum Reflector, Small (100W-150W)
ERHB-AR-LG	70514101	Aluminum Reflector, Large (200W-240W)
ERHB-PC-SM	70516101	Polycarbonate Reflector, Small (100W-150W)
ERHB-PC-LG	70517101	Polycarbonate Reflector, Large (200W-240W)
ERHB-60-SM	70411101	60 Degree Lens, Small (100W-150W)
ERHB-60-LG	70412101	60 Degree Lens, Large (200W-240W)
ERHB-WG-SM	70522101	Wire guard, Small (100W-150W)
ERHB-WG-LG	70523101	Wire guard, Large (200W-240W)

* External BBU options available. See ETISSL.com for details.

MOUNTING ACCESSORIES

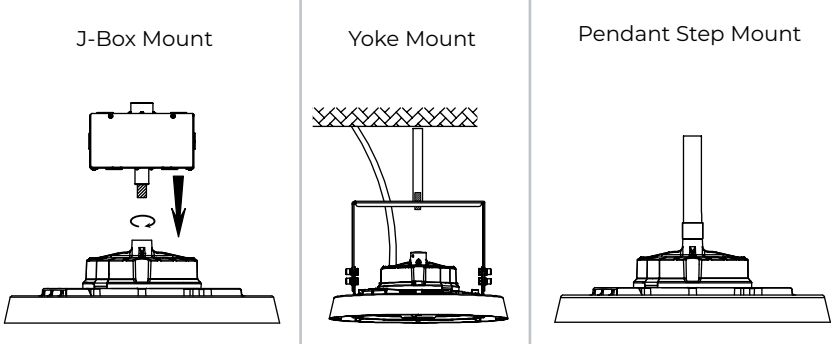

PLOT



CLHB | Compact Linear High Bays

3 LUMEN BOOST® | 2 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING



KEY FEATURES

Each CLHB Compact High Bay luminaire combines a small profile with superior lumen output. With various made-to-order choices, including battery backup, high voltage and cord options, this series is ideal for garages, and workshops, or in a commercial setting in factories and warehouses.

- **Color Preference®** Select from 2 CCTs (4000/5000K)
- **Lumen Boost®** Select from 3 lumen levels
- Compact profile with superior lumen output
- Each housing end cap includes a single 1/2” knockout for thru-wire and tandem installation
- 0-10V dimming
- Rated Life (L70) Lumen Pkg. 1 & 2 > 95, 000 hours
Lumen Pkg. 3 & 4 > 90,000 hours



CATALOG LOGIC

Series	Lumens	Lumen Boost	CCT	Voltage	Dimming	OPTIONS		
CLHB Compact Linear High Bay	Lumen Pkg. (Nominal/Approx.)	LB3 3 Lumen Boost®	CP2 2 CCT Color Preference®	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V	BBU EMB16 Emergency Battery Backup 16W (enclosure included) ^{3,4} (Leave Blank) No BBU	Surge SPD10 10kVA Surge Protection ⁵ (Leave Blank) Standard 6kV Surge Protection	Cords CC6NTL120V 6', 14/3 So Cord w/ NEMA 125V Plug CC6NTL277V 6' 14/3 SO Cord w/ NEMA 277V Plug (Leave Blank) No Cord
	1 8400 – 15800 lm	Lumen Pkg #1: 60 80 110W	4000K					
	2 17000 – 23500 lm	Lumen Pkg #2: 120 140 165W	5000K					
	3 25500 – 31500 lm	Lumen Pkg #3: 180 200 220W						
	4 33500 – 43000 lm	Lumen Pkg #4: 240 280 300W						

Notes: 1. Lumen package ranges are approximate values. For actual lumen data, please see below.
2. High-Volt 347-480V MTO only. Lead times apply.
3. EMB16 BBU available for Multi-Volt models only. Made to Order—lead times apply.
4. EMB16 BBU not compatible with sensors QI-MW-OCC or QI-PIR-OCC.
5. Surge Protection MTO only. Lead times apply.

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Wattage Levels (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
CLHB-1-LB3-CP2-MV-LVD	63821101	Compact Linear High Bay, Lumen Pkg 1	60 80 110W	9462 – 15870	4000K 5000K	80+	120-277V	0-10V
CLHB-2-LB3-CP2-MV-LVD	63821201	Compact Linear High Bay, Lumen Pkg 2	120 140 165W	17812 – 23589				
CLHB-3-LB3-CP2-MV-LVD	63822101	Compact Linear High Bay, Lumen Pkg 3	180 200 180W	26808 – 31695				
CLHB-4-LB3-CP2-MV-LVD	63822201	Compact Linear High Bay, Lumen Pkg 4	240 280 300W	35263 – 42269				

CLHB | Compact Linear High Bays

3 LUMEN BOOST® | 2 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING

MADE-TO-ORDER PRODUCT INFO (Longer lead times apply. Contact ETi for details)

MADE-TO-ORDER BATTERY BACKUP OPTIONS		
Catalog / Part #	Order #	Description
CLHB-1-LB3-CP2-MV-LVD-EMB16	63821101-EM	Compact Linear High Bay, Lumen Pkg 1 with Emergency BBU (16W)
CLHB-2-LB3-CP2-MV-LVD-EMB16	63821201-EM	Compact Linear High Bay, Lumen Pkg 2 with Emergency BBU (16W)
CLHB-3-LB3-CP2-MV-LVD-EMB16	63822101-EM	Compact Linear High Bay, Lumen Pkg 3 with Emergency BBU (16W)
CLHB-4-LB3-CP2-MV-LVD-EMB16	63822201-EM	Compact Linear High Bay, Lumen Pkg 4 with Emergency BBU (16W)

MADE-TO-ORDER HV (347-480VAC) OPTIONS		
CLHB-1-LB3-CP2-HV-LVD	63821101-HV	Compact Linear High Bay, Lumen Pkg 1, 347-480V
CLHB-2-LB3-CP2-HV-LVD	63821201-HV	Compact Linear High Bay, Lumen Pkg 2, 347-480V
CLHB-3-LB3-CP2-HV-LVD	63822101-HV	Compact Linear High Bay, Lumen Pkg 3, 347-480V
CLHB-4-LB3-CP2-HV-LVD	63822201-HV	Compact Linear High Bay, Lumen Pkg 4, 347-480V

MADE-TO-ORDER PLUG OPTIONS		
CLHB-1-LB3-CP2-MV-LVD-CC6NTL120V	63821101-CC6NTL120V	Compact Linear High Bay, Lumen Pkg 1 with 6', 14/3 cord w/ NEMA Twist Lock L5-15 (125V) Plug
CLHB-2-LB3-CP2-MV-LVD-CC6NTL120V	63821201-CC6NTL120V	Compact Linear High Bay, Lumen Pkg 2 with 6', 14/3 cord w/ NEMA Twist Lock L5-15 (125V) Plug
CLHB-3-LB3-CP2-MV-LVD-CC6NTL120V	63822101-CC6NTL120V	Compact Linear High Bay, Lumen Pkg 3 with 6', 14/3 cord w/ NEMA Twist Lock L5-15 (125V) Plug
CLHB-4-LB3-CP2-MV-LVD-CC6NTL120V	63822201-CC6NTL120V	Compact Linear High Bay, Lumen Pkg 4 with 6', 14/3 cord w/ NEMA Twist Lock L5-15 (125V) Plug
CLHB-1-LB3-CP2-MV-LVD-CC6NTL277V	63821101-CC6NTL277V	Compact Linear High Bay, Lumen Pkg 1 with 6', 14/3 cord w/ NEMA Twist Lock L5-15 (277V) Plug
CLHB-2-LB3-CP2-MV-LVD-CC6NTL277V	63821201-CC6NTL277V	Compact Linear High Bay, Lumen Pkg 2 with 6', 14/3 cord w/ NEMA Twist Lock L5-15 (277V) Plug
CLHB-3-LB3-CP2-MV-LVD-CC6NTL277V	63822101-CC6NTL277V	Compact Linear High Bay, Lumen Pkg 3 with 6', 14/3 cord w/ NEMA Twist Lock L5-15 (277V) Plug
CLHB-4-LB3-CP2-MV-LVD-CC6NTL277V	63822201-CC6NTL277V	Compact Linear High Bay, Lumen Pkg 4 with 6', 14/3 cord w/ NEMA Twist Lock L5-15 (277V) Plug

MADE-TO-ORDER SURGE PROTECTION OPTIONS		
CLHB-1-LB3-CP2-MV-LVD-SPD10	63821101-SPD10	Compact Linear High Bay, Lumen Pkg 1 with 10kVA Surge Protection
CLHB-2-LB3-CP2-MV-LVD-SPD10	63821201-SPD10	Compact Linear High Bay, Lumen Pkg 2 with 10kVA Surge Protection
CLHB-3-LB3-CP2-MV-LVD-SPD10	63822101-SPD10	Compact Linear High Bay, Lumen Pkg 3 with 10kVA Surge Protection
CLHB-4-LB3-CP2-MV-LVD-SPD10	63822201-SPD10	Compact Linear High Bay, Lumen Pkg 4 with 10kVA Surge Protection

MADE-TO-ORDER SURGE PROTECTION WITH PLUG OPTIONS		
CLHB-1-LB3-CP2-MV-LVD-SPD10-CC6NTL120V	63821101-SPD10-CC6NTL120V	Compact Linear High Bay, Lumen Pkg 1 with 10kVA Surge Protection and 6', 14/3 cord w/ NEMA Twist Lock L5-15 (125V) Plug
CLHB-2-LB3-CP2-MV-LVD-SPD10-CC6NTL120V	63821201-SPD10-CC6NTL120V	Compact Linear High Bay, Lumen Pkg 2 with 10kVA Surge Protection and 6', 14/3 cord w/ NEMA Twist Lock L5-15 (125V) Plug
CLHB-3-LB3-CP2-MV-LVD-SPD10-CC6NTL120V	63822101-SPD10-CC6NTL120V	Compact Linear High Bay, Lumen Pkg 3 with 10kVA Surge Protection and 6', 14/3 cord w/ NEMA Twist Lock L5-15 (125V) Plug
CLHB-4-LB3-CP2-MV-LVD-SPD10-CC6NTL120V	63822201-SPD10-CC6NTL120V	Compact Linear High Bay, Lumen Pkg 4 with 10kVA Surge Protection and 6', 14/3 cord w/ NEMA Twist Lock L5-15 (125V) Plug
CLHB-1-LB3-CP2-MV-LVD-SPD10-CC6NTL277V	63821101-SPD10-CC6NTL277V	Compact Linear High Bay, Lumen Pkg 1 with 10kVA Surge Protection and 6', 14/3 cord w/ NEMA Twist Lock L5-15 (277V) Plug
CLHB-2-LB3-CP2-MV-LVD-SPD10-CC6NTL277V	63821201-SPD10-CC6NTL277V	Compact Linear High Bay, Lumen Pkg 2 with 10kVA Surge Protection and 6', 14/3 cord w/ NEMA Twist Lock L5-15 (277V) Plug
CLHB-3-LB3-CP2-MV-LVD-SPD10-CC6NTL277V	63822101-SPD10-CC6NTL277V	Compact Linear High Bay, Lumen Pkg 3 with 10kVA Surge Protection and 6', 14/3 cord w/ NEMA Twist Lock L5-15 (277V) Plug
CLHB-4-LB3-CP2-MV-LVD-SPD10-CC6NTL277V	63822201-SPD10-CC6NTL277V	Compact Linear High Bay, Lumen Pkg 4 with 10kVA Surge Protection and 6', 14/3 cord w/ NEMA Twist Lock L5-15 (277V) Plug

CLHB | Compact Linear High Bays

3 LUMEN BOOST® | 2 CCT COLOR PREFERENCE® | 120-277V | 0-10V DIMMING

ACCESSORIES (must be ordered separately, field installed)

Occupancy Sensor^{1,2,3}

⚠ Not compatible with MTO BBU Products

Catalog / Part #	Order #	Description
QI-MW-OCC	70211101	Plug-In Microwave OC Sensor
QI-PIR-OCC	70226101	Plug-In PIR OC Sensor 0-10V Dimming, 12-24 VDC
BCB-RCOP	70224101	Sensor Remote Control Programmer

Notes: 1. Factory OC sensor settings can be changed w/ (BCB-RCOP) handheld remote programmer accessory. (must be ordered separately)
2. QI-MW-OCC Default setting: 100% sensitivity, 5 min. hold time, Daylight sensor is ON, Dimming level: 30%, Dimming time: 60 minutes
3. QI-PIR-OCC Default setting: 100% sensitivity, 5 min. hold time, Daylight sensor is ON, Dimming level: 30%, Dimming time: 60 minutes



Remote Control Programmer
(for QI-MW-OCC
and QI-PIR-OCC)
BCB-RCOP

Mounting Kits and Wire Guards


Catalog / Part #	Order #	Description
CLHB-SMK	70532101	Compact Linear High Bay Surface Mount Kit
CLHB-PMK	70533101	Compact Linear High Bay Pendant Mount Kit
CLHB-WG12	70543101	Compact Linear High Bay Wire Guard for CLHB-1 & CLHB-2
CLHB-WG34	70544101	Compact Linear High Bay Wire Guard (Fits CLHB-3 & CLHB-4)




Surface Mount Kit
CLHB-SMK



Pendant Mount Kit
CLHB-PMK




Wire Guard for Lumen
Pkg. Sizes 3&4
CLHB-WG34




Wire Guard for Lumen
Pkg. Sizes 1&2
CLHB-WG12

DIMENSIONS

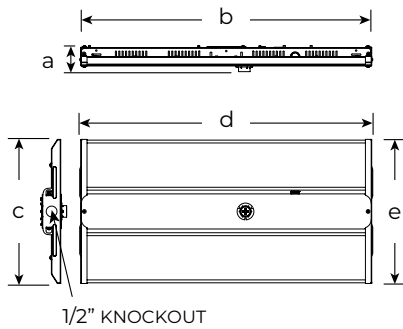

Size	a	b	c	d	e
Lumen Package 1	2.13"	22.75"	11.81"	23.98"	11.18"
Lumen Package 2	2.13"	22.75"	11.81"	23.98"	11.18"
Lumen Package 3	2.13"	22.75"	14.17"	23.98"	13.5"
Lumen Package 4	2.13"	22.75"	14.17"	23.98"	13.5"

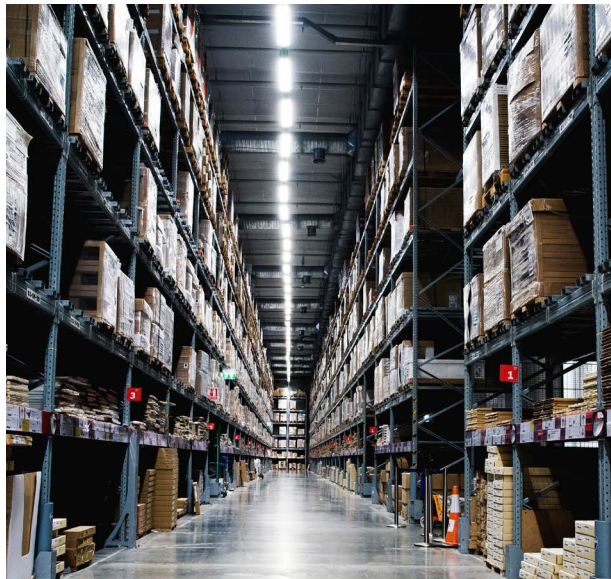

HBL | Linear High Bay

5000K | 120-277V | 0-10V DIMMING



KEY FEATURES

The low profile HBL EZ Install High Bay luminaire with integral OC sensor has a low profile and is designed for quick and easy installation. Applications: ideal for large areas, warehouse aisles, factories, airplane hangers and more.

- **EZ Install** High Bays come ready for suspension mounting
- **Integral Microwave OC Sensor** for energy savings & code compliance
- Optional tandem mount bracket available to easily links two fixtures together
- Each housing end cap includes a single 1/2" knockout for thru-wire and tandem installation
- 0-10V dimming
- Rated Life (L70) 204,800 Hours



Internal OC Sensor is standard



Tandem Fixture Mount Accessory Available



CATALOG LOGIC

Series	Size	Lumens	CCT	CCT	Voltage	Dimming	Sensor
HBL EZ Install Linear High Bay	2FT	Lumen Pkg. (Nominal/Approx.) 18000LM 18630 lm	8 80+ CRI	50K 5000K	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V	OS Internal Occupancy Sensor

STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Replaces (HID Up to)	Wattage (Nominal)	Delivered Lumens	CCT	CRI	Volt.	Dim
HBL-2FT-18000LM-8-50K-MV-LVD-OS	50242162	2-Foot EZ Install High Bay with OC Sensor	300W	138	18529	5000K	80+	120-277V	0-10V

ACCESSORIES (Order Separately, Field Install)

Order #	Description
70206101 (HD03R)	OC sensor handheld remote programmer
95024016102	Tandem fixture mounting bracket (connect 2 HBL's)
95457326101	Set of (2) 10' long air craft cables

* External BBU and test remote options available. See ETISSL.com for details.




Internal Microwave OC Sensor

'Hold Time' & 'Standby Time' settings can be manually adjusted using dip switches on driver.

Handheld remote (70206101) required to change all other factory settings.



DIMENSIONS

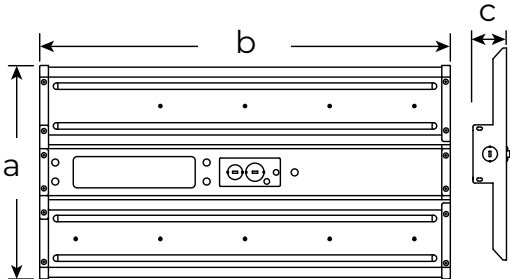

Size	a	b	c
2 FT	12.7"	24.4"	2.1"
2 FT Tandem Mount	12.7"	48.9"	2.1"

T8 / T5 | LED Tubes

REPLACEMENTS FOR FLUORESCENT TUBES

KEY FEATURES

ETi offers a variety of T8 and T5 LED lamps. We have double-ended ballast bypass lamps for shunted sockets and direct replacement lamps that work with existing ballasts for time and energy-saving retrofits.

- Glass housing
- 80+ CRI
- Non-Dimmable
- Rated Life (L70) > 50,000 hours (for bypass lamps)



STOCK ORDERING INFORMATION

Catalog / Part #	Order #	Description	Base	Replaces (FI Up to)	Watts	Nominal Lumens	CCT	CRI	Dim	
Double-Ended Ballast Bypass T8 LED Tubes, 120-277V										
T8BP-8-55-850-MV-DE	64102161	8' T8 Power Double End Power Integral Driver Glass Tube, DLC, 5000K	Single Pin	80w T10/12	43	5500	5000K	80+	Non-Dim	
T8BP-4-12-840-MV-DE	64101141	4' T8 Power Double End Power Integral Driver Glass Tube, DLC, 4000K	Medium Bi-Pin	32w T8	12	1800	4000K	80+	Non-Dim	
T8BP-4-12-850-MV-DE	64101161	4' T8 Power Double End Power Integral Driver Glass Tube, DLC, 5000K	Medium Bi-Pin	32w T8	12	1800	5000K	80+	Non-Dim	
T8BP-4-12-840-MV-DE-PET	64101143	4' T8 Power Either End Integral Driver Glass Tube, 4000K	Medium Bi-Pin	32w T8	12	1800	4000K	80+	Non-Dim	
T8BP-4-12-850-MV-DE-PET	64101163	4' T8 Power Either End Integral Driver Glass Tube, DLC, 4500K	Medium Bi-Pin	32w T8	12	1800	5000K	80+	Non-Dim	
Double-Ended Ballast Bypass T5 LED Tubes, 120-277V										
T5BP-4-35-850-MV-DE	64105161	4' T5 Power Either End Integral Driver Glass Tube, DLC, 5000K	Medium Bi-Pin	54w T5	25	3500	5000K	80+	Non-Dim	
Direct Replacement Lamps, T8 LED Tubes Works with Existing Ballast										
T8BC-4-15-840-MV	64101441	4' T8 Direct Replacement Ballast Compatible LED Tube, DLC, 4000K	Medium Bi-Pin	32w T8	15	2200	4000K	80+	Non-Dim	
T5BP-4-35-850-MV-DE	64105161	4' T8 Direct Replacement Ballast Compatible LED Tube, DLC, 5000K	Medium Bi-Pin	32w T8	15	2200	5000K	80+	Non-Dim	



Enhancing Your Lighting Experience

To Order:

Call ETI Customer Service

8 a.m. - 5 p.m., CST, Monday - Friday

1-855-ETI-SSL (1-855-384-7754)

4873 Thurmon Tanner Pkwy,
Flowery Branch, GA 30542
www.ETISSL.com