



VRST | VERSASTRIP SERIES

4000K | 5000K

KEY FEATURES

ETI's VersaStrip Series are commercial LED strip lights with 0-10V dimming. These powerful, energy-efficient 4' strip lights come in 1-pack and 2-pack.

CCT & Light Quality

- Available in 4000K and 5000K options, 80+ CRI

Light Output & Efficacy

- High Lumen Output: 5800 lm per 4' fixture, up to 132 LPW
11700 lm for two 4' fixtures, up to 127 LPW

Dimming, Controls

- 0-10V Dimming

Continuous Runs

- Continuous Runs: 4-FT up to 8 | 8-FT up to 4

SPECIFICATIONS

Construction & Optics

- Cold rolled steel housing, white powder coated
- Frosted, 1mm thick polymer lens provides a uniform and soft visual appearance when in direct view with minimal LED pixelation and reduces glare

Installation

- Surface Mount hardware included
- Continuous Runs: 4-FT up to 8 | 8-FT up to 4

Electrical

- >140,000 hour LEDs at L70 for reduced maintenance
- Operates at 120-277V, 50/60 Hz
- 0-10V dimmable driver
- Operating temperature: -4°F to 113°F (-20°C to 45°C)

Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://etissl.com/warranty/)

| | |
|------------|----------|
| DATE: | PROJECT: |
| TYPE: | NOTES: |
| CATALOG #: | |



VersaStrip



| KEY DATA | |
|-----------------------|----------------|
| LUMEN RANGE | 5934 – 11796 |
| WATTAGE RANGE | 45 – 96 |
| EFFICACY (LPW) | 127 – 132 |
| REPORTED LIFE (HOURS) | L70 / >140,000 |

Certifications & Test Data


- cUS ETL Rated, Damp location
- Adheres to LM79, LM80, and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



ETI Lighting
4873 Thurmon Tanner Parkway, Flowery Branch, GA 30542 | TEL: 1.855.384.7754
E-mail: ETIorders@ETISSL.com | [ETISSL.com](https://etissl.com)

All specifications are subject to change without notice.
All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.
VersaStrips_B0107XXXX_Spec | Page 1 of 3 | May 21, 2025 12:35 PM

CATALOG LOGIC

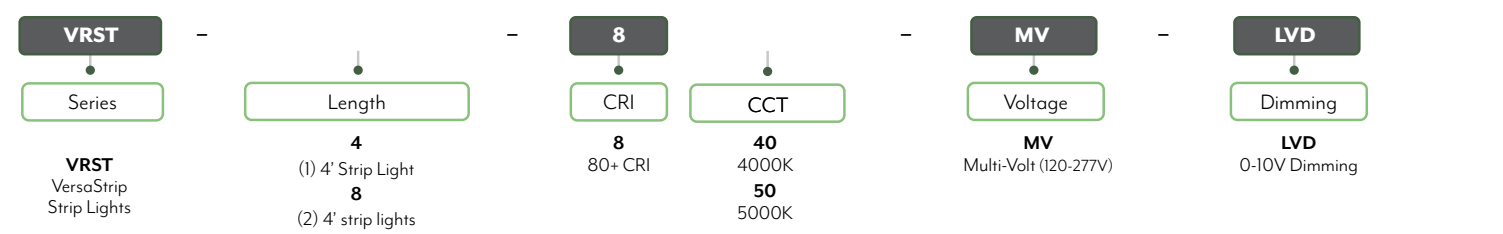


ORDER INFORMATION / SPEC DETAILS

| CATALOG PART NUMBER | ORDER NUMBER | DESCRIPTION | VOLTAGE | DIMMING | DLC | CRI | CCT | NOMINAL WATTS | LUMEN PACKAGE | DELIVERED LUMENS | EFFICACY |
|---------------------|--------------|-------------------------|----------|---------|----------|-----|-------|---------------|---------------|------------------|----------|
| VRST-4-840-MV-LVD | B01078601A | 4' VersaStrip 4000K | 120-277V | 0-10V | Standard | 80+ | 4000K | 45 | 5800 | 5951 | 132 |
| VRST-4-850-MV-LVD | B01078801A | 4' VersaStrip 5000K | 120-277V | 0-10V | Standard | 80+ | 5000K | 45 | 5800 | 5934 | 130 |
| VRST-8-840-MV-LVD | 54598341 | (2) 4' VersaStrip 4000K | 120-277V | 0-10V | Standard | 80+ | 5000K | 97 | 11700 | 11526 | 119 |
| VRST-8-850-MV-LVD | B01079801A | (2) 4' VersaStrip 5000K | 120-277V | 0-10V | Standard | 80+ | 5000K | 92 | 11700 | 11796 | 127 |

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com 2. For DLC listing, search part number. Example: VRST-4-840-MV-LVD. DLC look up information for VRST-8-840-MV-LVD is under "54598341".

DIMENSIONS / DETAILS

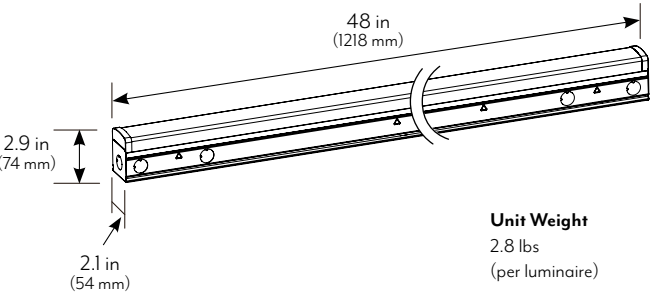

PERFORMANCE / Data

| Lumen Maintenance | |
|---------------------------|--|
| Ambient Temp. | TM-21 Lumen Maintenance (54,000 hours) |
| 25° C (77° F) | 87.77% |
| Ambient Temp. | TM-21 Theoretical L70 (hours) |
| 25° C (77° F) | >140,000 |
| Load Information | |
| Power Factor | > 0.90 |
| THD | < 20% |
| Frequency | 50/60 Hz |
| Low Temp Start / Max Temp | -20° C (-4° F) / 45° C (113° F) |

MOUNTING



DIMMING LIST

| DIMMER BRAND | DIMMER MODEL |
|---------------|--------------|
| 0-10V DIMMERS | |
| LUTRON | DVTV-IV/WH |
| LUTRON | DVSTV-WH |
| LUTRON | NFTV-WH |
| LUTRON | NTSTV-DV-WH |
| LEVITON | IP710-DLZ |
| COOPER | SFIOP-W |
| LEVITON | DD710-BDZ |

PHOTOMETRIC SAMPLES

4-Foot

IES

Luminaire Data:

| | |
|------------------|-------------------------|
| CCT & CRI | 4000K, 80+ CRI |
| DELIVERED LUMENS | 5951 |
| WATTAGE | 45 |
| EFFICACY | 132 |
| SPACING | 0° = 1.26 / 90° = 1.371 |

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

A Candela Plot for a 4-foot luminaire. The plot shows a beam spread from 0° to 90°. The vertical axis represents candela (cd) with values: 0, 283, 567, 850, 1133, 1417, 1700. The horizontal axis represents degrees (°) with values: 0°, 10°, 20°, 30°, 40°. A green curve represents the beam spread, and a black curve represents the beam spread at 90°. A legend at the bottom indicates 0° (black) and 90° (green).

8-Foot

IES

Luminaire Data:

| | |
|------------------|------------------------|
| CCT & CRI | 5000K, 80+ CRI |
| DELIVERED LUMENS | 11796 |
| WATTAGE | 93 |
| EFFICACY | 127 |
| SPACING | 0° = 1.26 / 90° = 1.28 |

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

A Candela Plot for an 8-foot luminaire. The plot shows a beam spread from 0° to 90°. The vertical axis represents candela (cd) with values: 0, 550, 1100, 1650, 2200, 2750, 3300. The horizontal axis represents degrees (°) with values: 0°, 10°, 20°, 30°, 40°. A green curve represents the beam spread, and a black curve represents the beam spread at 90°. A legend at the bottom indicates 0° (black) and 90° (green).