

ALVL | ALLURE SERIES VANITY LIGHTS

5 CCT COLOR PREFERENCE®

KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 5 Selectable CCTs Standard (2700K, 3000K, 3500K, 4000K, 5000K)
- Available with and without 2000K nightlight feature
- 90+ CRI
- TRIAC Dimming (120V)

SPECIFICATIONS

Construction

- Steel Housing with Matte Black and Brushed Nickel Finishes

Optics

- Frosted, polymer diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation

- Field select CCT using integral switch behind the light prior to installation. Ships at 3000K.
- Mounting Hardware Included
- New install or retrofit (J-box)

Electrical

- > 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- TRIAC dimming, down to 10%*
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located behind the light.

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).


Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etilighting.com/warranty/)


DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	




Matte Black Finish

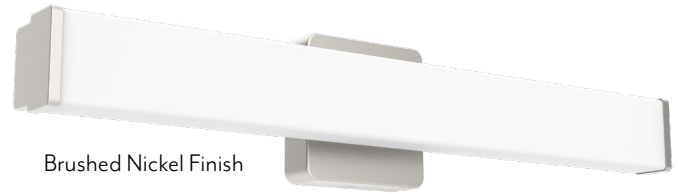

Brushed Nickel Finish

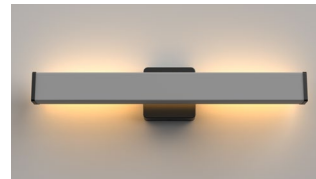

Matte Black Finish with Nightlight

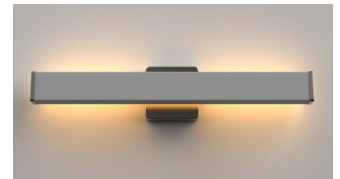

Brushed Nickel Finish with Nightlight



Color Preference®

NightLightR™



KEY DATA	
LUMEN RANGE	1813 – 2379
WATTAGE RANGE	24.4 – 26.9
EFFICACY RANGE (LPW)	76 – 88
REPORTED LIFE (HOURS)	L70 / > 50,000

Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



LM 63

LM 79

LM 80

TM 21

IES



CATALOG LOGIC

ALVL

Series

ALVL

Allure Series

Vanity Light

-

24

Length

24

(24")

-

9

CRI

9

90+ CRI

-

CCT

CP5

5 CCT²

Color Preference*

2700/3000/3500/4000/5000K

CP5NL

5 CCT²

Color Preference*

2700/3000/3500/4000/5000K

plus 2000K Night Light

-

SV

Voltage

SV

Single-Volt (120V)

-

TD

Dimming

TD

TRIAC Dimming

-

Finish

BN

Brushed Nickel

MB

Matte Black

Notes:
1. Ships at 3000K CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG. ¹	DELIVERED LUMENS	LPW	VOLTAGE	DIM
ALVL-24-9CP5-SV-TD-BN	C06011301A	24" Allure Vanity Light / Brushed Nickel	4	90+	2700K	25	2000	2052	77	120V	TRIAC
					3000K	25	2000	2153	82		
					3500K	25	2000	2342	88		
					4000K	25	2000	2379	89		
					5000K	25	2000	2346	87		
ALVL-24-9CP5NL-SV-TD-BN	C06014301A	24" Allure Vanity Light with NightLightR / Brushed Nickel	4	90+	2000K NL	5	200	129	26	120V	TRIAC
					2700K	25	2000	1923	76		
					3000K	25	2000	2018	81		
					3500K	25	2000	2158	86		
					4000K	25	2000	2183	87		
ALVL-24-9CP5-SV-TD-MB	C06011302A	24" Allure Vanity Light / Matte Black	4	90+	2700K	25	2000	1813	69	120V	TRIAC
					3000K	25	2000	1920	74		
					3500K	25	2000	2084	80		
					4000K	25	2000	2134	81		
					5000K	25	2000	2033	77		
ALVL-24-9CP5NL-SV-TD-MB	C06014302A	24" Allure Vanity Light with NightLightR / Matte Black	4	90+	2000K NL	5	200	216	42	120V	TRIAC
					2700K	25	2000	1863	72		
					3000K	25	2000	1956	76		
					3500K	25	2000	2097	81		
					4000K	25	2000	2114	81		
					5000K	25	2000	2030	77		

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com

DIMENSIONS / DETAILS

23.9 in.
(607 mm)

4.7 in.
(119.3 mm)

4.7 in.
(96.5 mm)

3.7 in.
(9 mm)

Unit Weight
1.5 lbs.

Easy access to color temperature select switch located behind the light.

Ships at 3000K

MOUNTING

Mounting plate, screws and wire connectors included.

PERFORMANCE / DATA

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 85%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 50,000

Load Information


Power Factor	> 0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-4°F to 104°F (-20°C to 40°C)

PHOTOMETRIC SAMPLE

IES

Luminaire Data: @ 3500K ALVL-24-9CP5-SV-TD-BN	
CCT & CRI	3500K, 90+ CRI
DELIVERED LUMENS	2158
WATTAGE	25.2 W
EFFICACY	86

Photometric values based on tests performed in compliance with LM-63 & LM-79

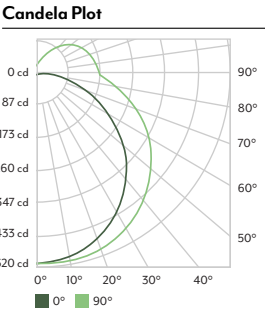

DIMMER COMPATIBILITY LIST

DIMMER BRAND	DIMMER MODEL
TRIAC DIMMERS	
LUTRON	DVCL-153PR
LUTRON	MACL-153MLH-WH
LUTRON	P-PKG1W-WH-R
LUTRON	STCL-153PH-WH
LEVITON	R11-DSL06-ITW
LEVITON	R00-RNL06-OTW
LEVITON	R68-06674-P0T
LEVITON	R02-DW6HD-2RW
TP-LINK	HS220
LUTRON	LECL-153
LUTRON	SCL-153P
LUTRON	NTCL-250
LUTRON	GT-150
LEVITON	DSL06-ILZ
LEVITON	TSL06
LEVITON	RDL06
COOPER	9540
COOPER	DLC03P
COOPER	TAL06P2

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).