

ISVL | ISPA SERIES VANITY LIGHTS

5 CCT COLOR PREFERENCE®

KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 5 Selectable CCTs Standard (2700K, 3000K, 3500K, 4000K, 5000K)
- Available with and without 2000K nightlight feature
- 90+ CRI
- TRIAC Dimming (120V)

SPECIFICATIONS

Construction

- Steel Housing with Matte Black and Brushed Nickel Finishes

Optics

- Frosted, polymer diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation

- Field select CCT using integral switch underneath lens prior to installation. Ships at 3000K.
- Mounting Hardware Included
- New install or retrofit (J-box)

Electrical


- > 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- TRIAC dimming, down to 10%*
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located beneath lens.

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).


Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)


DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

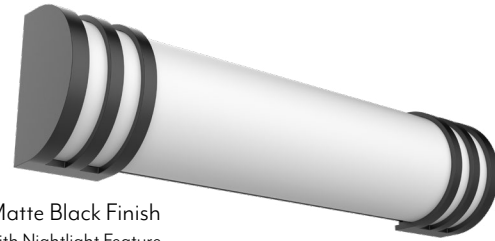


Matte Black Finish
with Nightlight Feature

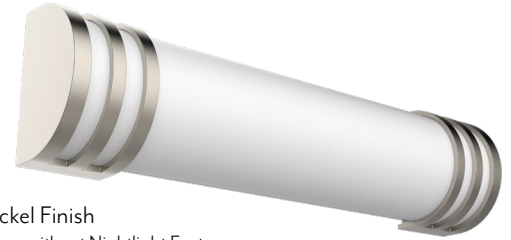

Brushed Nickel Finish
Available with or without Nightlight Feature



Matte Black Finish with Nightlight



Brushed Nickel Finish with Nightlight



Color
Preference®



KEY DATA	
LUMEN RANGE	1612 – 1881
WATTAGE RANGE	24.1 – 28.9
EFFICACY RANGE (LPW)	58 – 74
REPORTED LIFE (HOURS)	L70 / > 50,000

Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



CATALOG LOGIC

ISVL

Series

ISVL
Ispa Series
Vanity Light

-

24

Length

24
(24")

-

9

CRI

9
90+ CRI

-

CCT

CP5
5 CCT¹
Color Preference®
2700/3000/3500/4000/5000K
CP5NL
5 CCT¹
Color Preference®
2700/3000/3500/4000/5000K
plus 2000K Night Light

-

SV

Voltage

SV
Single-Volt (120V)

-

TD

Dimming

TD
TRIAC Dimming

-

Finish

BN
Brushed Nickel
MB²
Matte Black

Notes:

1. Ships at 3000K CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

2. Matte Black available in CP5NL only.

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG.¹	DELIVERED LUMENS	LPW	VOLTAGE	DIM
ISVL-24-9CP5-SV-TD-BN	C06006301A	24" Ispa Vanity Light / Brushed Nickel	4	90+	2700K	25	1800	1638	68	120V	TRIAC
					3000K	25	1800	1698	70		
					3500K	25	1800	1766	73		
					4000K	25	1800	1825	74		
					5000K	25	1800	1810	74		
ISVL-24-9CP5NL-SV-TD-BN	C06008301A	24" Ispa Vanity Light with NightLightR / Brushed Nickel	4	90+	2000K NL	5	200	28	6	120V	TRIAC
					2700K	27	1800	1671	58		
					3000K	27	1800	1738	61		
					3500K	27	1800	1813	64		
					4000K	27	1800	1881	65		
ISVL-24-9CP5NL-SV-TD-MB	C06008302A	24" Ispa Vanity Light with NightLightR / Matte Black	4	90+	5000K	27	1800	1858	64	120V	TRIAC
					2000K NL	5	200	28	6		
					2700K	27	1800	1552	58		
					3000K	27	1800	1612	60		
					3500K	27	1800	1675	63		

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com

DIMENSIONS / DETAILS

5.8 in.
(147.3 mm)

23.8 in.
(604.5 mm)

3.8 in.
(96.5 mm)

Unit Weight
1.5 lbs.

Easy access to color temperature select switch located beneath lens.

Ships at 3000K

MOUNTING

Screws, gasket and wire connectors included.

ETI Lighting
4873 Thurmon Tanner Parkway, Flowery Branch, GA 30542 | TEL: 1.855.384.7754
E-mail: ETIorders@ETISSL.com | ETISSL.com

All specifications are subject to change without notice.
All reported values are typical values, measured under laboratory conditions @ 25° C. (77° F).
Actual performance can vary slightly as a result of end-user application & environment.

Ispa_Vanity_Spec | Page 2 of 3 | June 25, 2025

PERFORMANCE / DATA

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 85%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 50,000

Load Information


Power Factor	> 0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-4°F to 104°F (-20°C to 40°C)

PHOTOMETRIC SAMPLE



Luminaire Data: @ 4000K ISVL-24-9CP5-SV-TD-BN	
CCT & CRI	4000K, 90+ CRI
DELIVERED LUMENS	1825
WATTAGE	24.6W
EFFICACY	74

Photometric values based on tests performed in compliance with LM-63 & LM-79



DIMMER COMPATIBILITY LIST

DIMMER BRAND	DIMMER MODEL
TRIAC DIMMERS	
LUTRON	DVCL-153PR
LUTRON	MACL-153MLH-WH
LUTRON	P-PKG1W-WH-R
LUTRON	STCL-153PH-WH
LEVITON	R11-DSL06-ITW
LEVITON	R00-RNL06-OTW
LEVITON	R68-06674-POT
LEVITON	R02-DW6HD-2RW
TP-LINK	HS220
COMMERCIAL ELECTRIC	HPDA311CWB
LUTRON	LECL-153
LUTRON	SCL-153P
LUTRON	NTCL-250
LUTRON	GT-150
LEVITON	DSL06-ILZ
LEVITON	REL06
LEVITON	TSL06
LEVITON	RDL06
COOPER	9540
COOPER	9573
COOPER	DLC03P
COOPER	SUT7
COOPER	TAL06P2

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).