



MTVL | MATTONE SERIES VANITY LIGHTS

5 CCT COLOR PREFERENCE®

KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 5 Selectable CCTs Standard (2700K, 3000K, 3500K, 4000K, 5000K)
- Available in black finish and brushed nickel finish
- 90+ CRI
- TRIAC Dimming (120V)

SPECIFICATIONS

Construction

- Steel Housing with Matte Black and Brushed Nickel Finishes

Optics

- Frosted, polymer diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation

- Field select CCT using integral switch underneath lens prior to installation. Ships at 3000K.
- Mounting Hardware Included
- New install or retrofit (J-box)

Electrical


- > 50,000 hour LEDs at L70
- Operates at 120V, 60Hz
- TRIAC dimming, down to 10%*
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located on fixture.

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.eti-lighting.com/warranty/)

| | |
|------------|----------|
| DATE: | PROJECT: |
| TYPE: | NOTES: |
| CATALOG #: | |

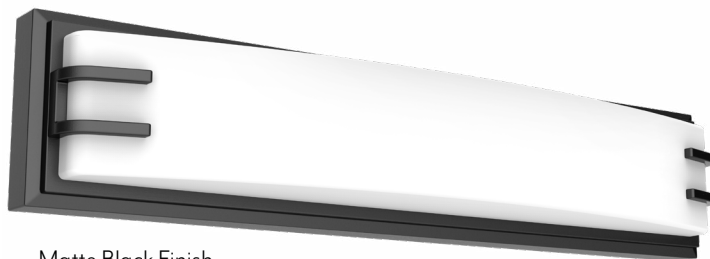

Matte Black Finish





Brushed Nickel Finish



| KEY DATA | |
|-----------------------|----------------|
| LUMEN RANGE | 1824 – 2185 |
| WATTAGE RANGE | 24.8 – 26.4 |
| EFFICACY RANGE (LPW) | 70 – 86 |
| REPORTED LIFE (HOURS) | L70 / > 50,000 |

Certifications & Test Data

- All luminaires are ETL Listed for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



ETI Lighting
4873 Thurmon Tanner Parkway, Flowery Branch, GA 30542 | TEL: 1.855.384.7754
E-mail: ETIorders@ETISSL.com | [ETISSL.com](https://www.eti-lighting.com)

All specifications are subject to change without notice.
All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.

Mattone_Vanity_Spec | Page 1 of 3 | July 30, 2025

CATALOG LOGIC

MTVL

Series

MTVL

Mattone Series

Vanity Light

-

24

Length

24

(24")

-

9

CRI

9

90+ CRI

CP5

CCT

CP5

5 CCT¹

Color Preference®

2700/3000/3500/4000/5000K

-

SV

Voltage

SV

Single-Volt (120V)

-

TD

Dimming

TD

TRIAC Dimming

-

Finish

BN

Brushed Nickel

MB

Matte Black

Notes:



1. Ships at 3000K CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

STOCK ORDERING INFORMATION

| CATALOG PART NUMBER | ORDER NUMBER | DESCRIPTION | CASE QTY | CRI | CCT | WATTS (NOM.) | LUMEN PKG. ¹ | DELIVERED LUMENS | LPW | VOLTAGE | DIM |
|-----------------------|--------------|---|----------|-----|-------|--------------|-------------------------|------------------|-----|---------|-------|
| MTVL-24-9CP5-SV-TD-BN | C06009301A | 24" Mattone Vanity Light / Brushed Nickel | 2 | 90+ | 2700K | 25 | 1800 | 1880 | 75 | 120V | TRIAC |
| | | | | | 3000K | 25 | 1800 | 1972 | 80 | | |
| | | | | | 3500K | 25 | 1800 | 2132 | 85 | | |
| | | | | | 4000K | 25 | 1800 | 2185 | 86 | | |
| | | | | | 5000K | 25 | 1800 | 2107 | 83 | | |
| MTVL-24-9CP5-SV-TD-MB | C06009302A | 24" Mattone Vanity Light / Matte Black | 2 | 90+ | 2700K | 25 | 1800 | 1824 | 70 | 120V | TRIAC |
| | | | | | 3000K | 25 | 1800 | 1912 | 74 | | |
| | | | | | 3500K | 25 | 1800 | 2065 | 79 | | |
| | | | | | 4000K | 25 | 1800 | 2115 | 80 | | |
| | | | | | 5000K | 25 | 1800 | 2035 | 77 | | |

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com

DIMENSIONS / DETAILS

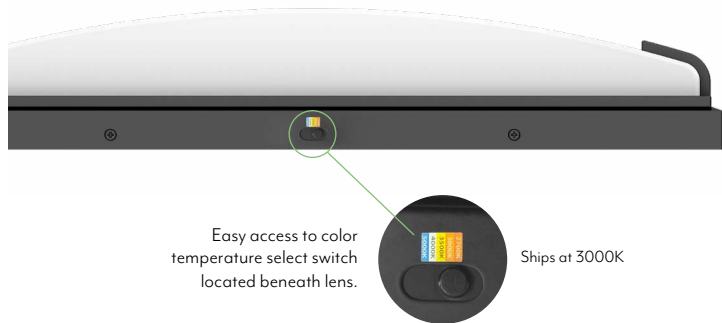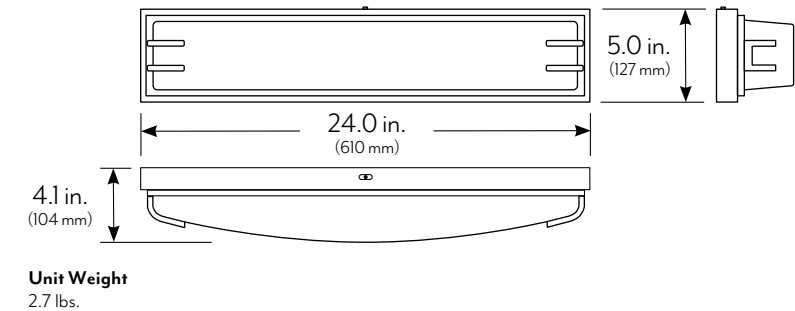

MOUNTING

Mounting plate, screws and wire connectors included.



PERFORMANCE / DATA

| Lumen Maintenance | |
|-------------------|--|
| Ambient Temp. | TM-21 Lumen Maintenance (54,000 hours) |
| 25° C (77° F) | > 85% |
| Ambient Temp. | TM-21 Theoretical L70 (hours) |
| 25° C (77° F) | > 50,000 |

| Load Information | |
|---------------------------|-------------------------------|
| Power Factor | > 0.90 |
| THD | < 20% |
| Frequency | 60 Hz |
| Low Temp Start / Max Temp | -4°F to 104°F (-20°C to 40°C) |

PHOTOMETRIC SAMPLE

IES

Luminaire Data: @ 4000K
MTVL-24-9CP5-SV-TD-BN

| | |
|------------------|-----------------------|
| CCT & CRI | 4000K, 90+ CRI |
| DELIVERED LUMENS | 2185 |
| WATTAGE | 25.4W |
| EFFICACY | 86 |

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

DIMMER COMPATIBILITY LIST

| DIMMER BRAND | DIMMER MODEL |
|---------------------|----------------|
| TRIAC DIMMERS | |
| LUTRON | DVCL-153PR |
| LUTRON | MACL-153MLH-WH |
| LUTRON | P-PKG1W-WH-R |
| LUTRON | STCL-153PH-WH |
| LEVITON | R11-DSL06-ITW |
| LEVITON | R00-RNL06-OTW |
| LEVITON | R68-06674-POT |
| LEVITON | R02-DW6HD-2RW |
| LEGRAND | RHCL453PNICCV4 |
| TP-LINK | HS220 |
| COMMERCIAL ELECTRIC | HPDA311CW/B |
| LUTRON | LECL-153 |
| LUTRON | SCL-153P |
| LUTRON | NTCL-250 |
| LUTRON | GT-150 |
| LEVITON | DSL06-ILZ |
| LEVITON | TSL06 |
| LEVITON | RDL06 |
| COOPER | 9540 |
| COOPER | 9573 |
| COOPER | DLC03P |
| COOPER | SUT7 |
| COOPER | TAL06P2 |

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).