

HRVL | HERA SERIES VANITY LIGHTS

5 CCT COLOR PREFERENCE®

KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 5 Selectable CCTs Standard (2700K, 3000K, 3500K, 4000K, 5000K)
- Available with black finish with 2000K nightlight feature, and brushed nickel finish without nightlight feature
- 90+ CRI
- TRIAC Dimming (120V)

SPECIFICATIONS

Construction

- Steel Housing with Matte Black and Brushed Nickel Finishes

Optics

- Frosted, polymer diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation

- Field select CCT using integral switch underneath lens prior to installation. Ships at 3000K.
- Mounting Hardware Included
- New install or retrofit (J-box)

Electrical


- > 50,000 hour LEDs at L70
- Operates at 120V, 60Hz
- TRIAC dimming, down to 10%*
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located on fixture.

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty


5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

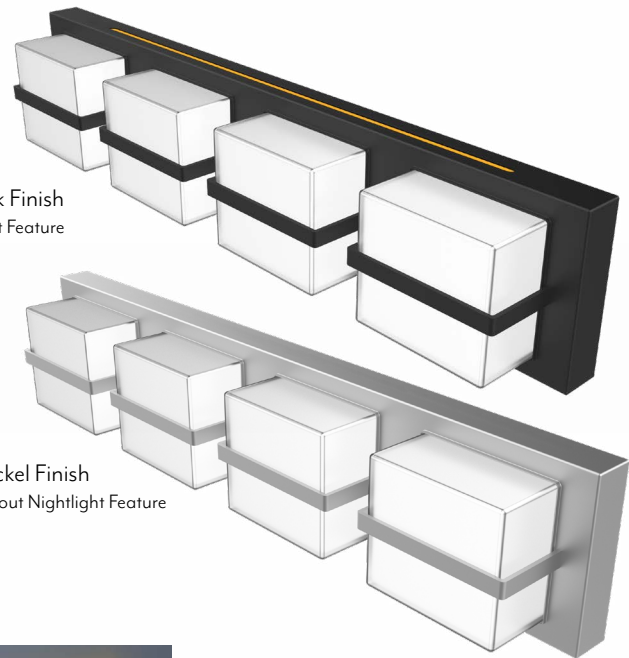

Matte Black Finish
with Nightlight Feature

Brushed Nickel Finish
Available without Nightlight Feature




Matte Black Finish with Nightlight



KEY DATA	
LUMEN RANGE	1422 – 1913
WATTAGE RANGE	23.8 – 25.4
EFFICACY RANGE (LPW)	59 – 75
REPORTED LIFE (HOURS)	L70 / > 50,000

Certifications & Test Data

- All luminaires are ETL Listed for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



CATALOG LOGIC

HRVL

Series

HRVL
 Hera Series
 Vanity Light

-

24

Length

24
 (24")

-

9

CRI

9
 90+ CRI

-

CCT

CP5
 5 CCT¹
 Color Preference®
 2700/3000/3500/4000/5000K
 CP5NL
 5 CCT¹
 Color Preference®
 2700/3000/3500/4000/5000K
 plus 2000K Night Light

-

SV

Voltage

SV
 Single-Volt (120V)

-

TD

Dimming

TD
 TRIAC Dimming

-

Finish

BN²
 Brushed Nickel
 MB³
 Matte Black

Notes:

- Ships at 3000K CCT. Installing contractor responsible for ensuring desired CCT selected during installation.
- Brushed Nickel available in CP5 only.
- Matte Black available in CP5NL only.

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG.¹	DELIVERED LUMENS	LPW	VOLTAGE	DIM
HRVL-24-9CP5-SV-TD-BN	C06019301A	24" Hera Vanity Light / Brushed Nickel	2	90+	2700K	25	1500	1626	64	120V	TRIAC
					3000K	25	1500	1710	69		
					3500K	25	1500	1859	74		
					4000K	25	1500	1913	75		
					5000K	25	1500	1864	73		
HRVL-24-9CP5NL-SV-TD-MB	C06020302A	24" Hera Vanity Light with NightLightR / Matte Black	2	90+	2000K NL	5	200	120	24	120V	TRIAC
					2700K	25	1500	1422	59		
					3000K	25	1500	1506	63		
					3500K	25	1500	1620	67		
					4000K	25	1500	1642	68		
					5000K	25	1500	1597	66		

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com

DIMENSIONS / DETAILS

Unit Weight
 5.6 lbs.

Easy access to color temperature select switch located beneath lens.

Ships at 3000K

MOUNTING

Mounting plate, screws and wire connectors included.

PERFORMANCE / DATA


Lumen Maintenance	
Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 85%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 50,000

Load Information	
Power Factor	> 0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-4°F to 104°F (-20°C to 40°C)

PHOTOMETRIC SAMPLE

IES	Luminaire Data: @ 4000K	
	HRVL-24-9CP5-SV-TD-BN	
	CCT & CRI	4000K, 90+ CRI
	DELIVERED LUMENS	1913
	WATTAGE	25.4W
	EFFICACY	75

Photometric values based on tests performed in compliance with LM-63 & LM-79



DIMMER COMPATIBILITY LIST

DIMMER BRAND	DIMMER MODEL
TRIAC DIMMERS	
LUTRON	DVCL-153PR
LUTRON	MACL-153MLH-WH
LUTRON	P-PKG1W-WH-R
LUTRON	STCL-153PH-WH
LEVITON	R11-DSL06-ITW
LEVITON	R00-RNL06-OTW
LEVITON	R68-06674-POT
LEVITON	R02-DW6HD-2RW
TP-LINK	HS220
LUTRON	LECL-153
LUTRON	SCL-153P
LUTRON	NTCL-250
LUTRON	GT-150
LEVITON	DSL06-ILZ
LEVITON	TSL06
LEVITON	RDL06
COOPER	9540
COOPER	DLC03P
COOPER	TAL06P2

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).