

18" CLOSET LIGHT

WITH PULL CHAIN | 1478 lm | 93 LPW | 4000K

KEY FEATURES

ETi's 18" Closet Light with Pull Chain is ENERGY STAR[®] rated and delivers 1478 lumens of extremely uniform ambient 4000K illumination.

- Sleek and modern flush mount wall light with white durable PC diffuser/lens
- At only 4.2" high, it fit's nicely above most door spaces
- On/Off pull chain
- 121,000 hours (L70 projected)

SPECIFICATIONS

Construction

- Sleek, modern LED luminaire
- Pull Chain

Light Quality

- 4000K, 80+ CRI

Optics

- PC diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation

- Fixture can be mounted to ceiling or wall
- Fixture plate, diffuser shade, wire connectors, mounting screws and 36" string included in package

Electrical

- Life: reported 86.14% lumen maintenance @ 54,000 hours and projected L70 @ 121,000 hours.
- Operates at 120V, 50/60 Hz
- Operating temperature: -15°C (-4°F) to 45°C (113°F)
- Non-Dimmable

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



KEY DATA	
Lumen	1478
Wattage	15.9
Efficacy (LPW)	93
Reported Life (Hours)	L70 / 121,000

Certifications & Test Data

- All luminaires are built to UL 1598 standards and have the appropriate UL labels and information on product.
- Damp location rated
- ENERGY STAR[®] rated (See Page 2 for search info.)
- IC Rated for direct contact with insulation
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- Suitable for use in closets when installed in accordance with NEC Section 410.16 (A)(1)(3) and 410.16 (C)(1)(3)(5)



18" Closet Light WITH PULL CHAIN | 1478 lm | 93 LPW | 4000K

CATALOG LOGIC

CS

Series

CS

18" Closet Light with Pull Chain

-

18

Size

18

(18" Dia)

-

12

Lumens

(Lumen Package)

12

(1200 lm)

-

840

CRI

8

80CRI (min.)

-

40

CCT

40

4000K

-

SV

Voltage

SV

Single-Volt 120V


Notes:
1. This product is not configurable, Only designated 'Stock' SKUs are available.

STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

Catalog Part Number	Order Number	Description	Case QTY	Lumen Package	Delivered Lumens ²	Wattage (Nominal)	Efficacy	CCT	CRI	Voltage	Dim	ENERGY STAR®
CS-18-12-840-SV	53603142	18" Closet Light with Pull Chain	2	1200	1478	16	93	4000K	80 (min)	120V	Non-Dim	Yes, Search: 536031##

Notes: 1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order
2. For more delivered lumens and test data on below, or visit ETISSL.com

DIMENSIONS / DETAILS

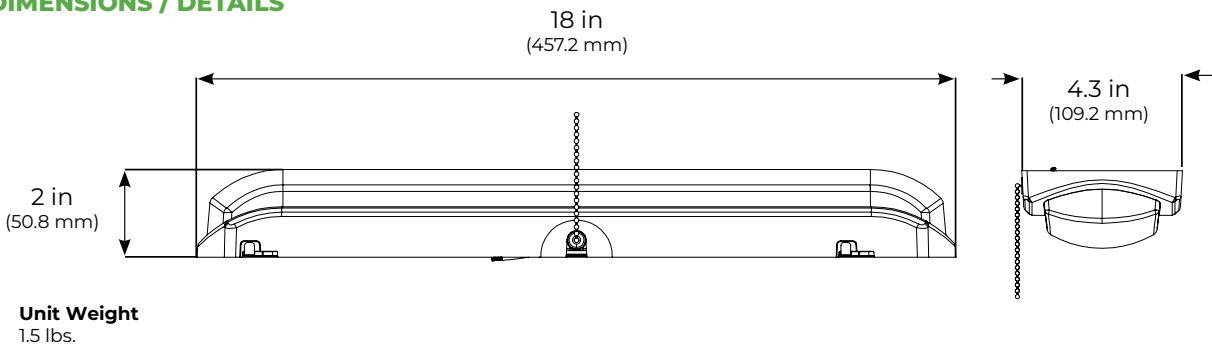

Unit Weight
1.5 lbs.

PERFORMANCE / DATA

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 86.14%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	121,000

Power Factor	.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 dBA
Low Temp Start / Max Temp	-15° C (-4° F) / 45° C (113° F)

PHOTOMETRIC SAMPLE

ETI
IES

Luminaire Data:	
CCT & CRI	4000K, 80+ CRI
Delivered Lumens	1478
Wattage	15.9W
Efficacy	92.9
Beam Angle	50° = 118.4o 10° = 174.2o
Spacing	0° = 1.30 90° = 1.28

Photometric values based on tests performed in compliance with LM-63 & LM-79

